
Study conducted for:

BLOOMINGTON ECONOMIC DEVELOPMENT CORPORATION

Study funded by:

DUKE ENERGY®

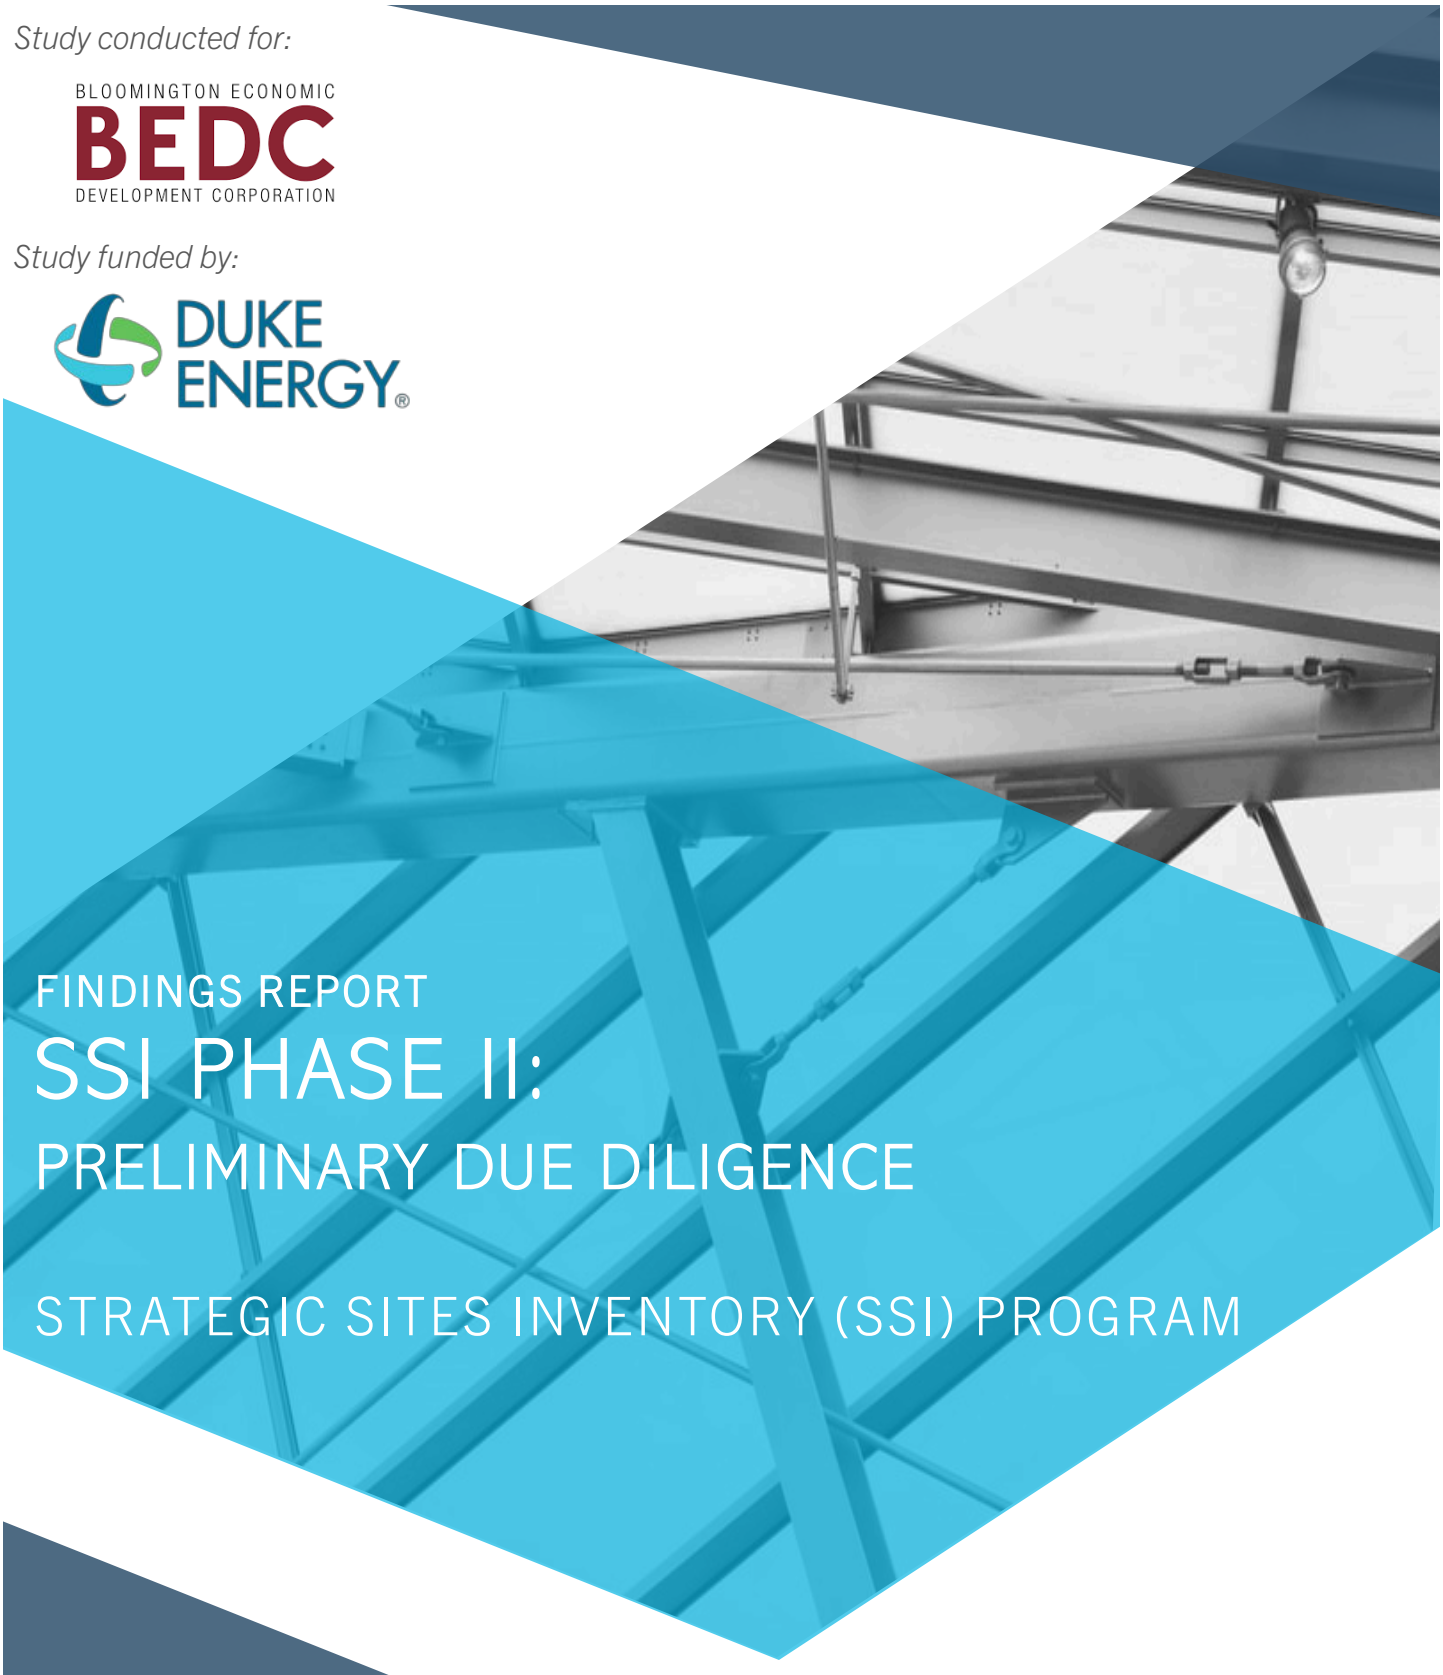

FINDINGS REPORT

SSI PHASE II:

PRELIMINARY DUE DILIGENCE

STRATEGIC SITES INVENTORY (SSI) PROGRAM

August 24, 2026

Site ID: 18105-001

Monroe County, IN

Study conducted by:

LEOTTA LOCATION + DESIGN

Findings Report

TABLE OF CONTENTS

Section Page

Introduction 2

Site Description 3

Geographic Location 5

Current Ownership 5

Findings Summary 6

Condition 6

Size and Configuration 6
Hydrography and Flood Risk 7
Potential Wetlands 7
Soils 8
Elevation/Topography 9
Sinkholes 11
Land Cover 12
Zoning and Land Use 14
Threatened and Endangered Species 16
Legacy Environmental Concerns 18

Connection 22

Transportation Assets 22
Access 22
Truck Routes 23
Railroads 23
Airport 23
Seaport 23

Section Page

Utility Infrastructure **24**
Potable Water 24
Sewer/Wastewater 24
Stormwater 24
Natural Gas 25
Electric 25
Telco/Broadband 25
Major Market Areas **26**

Community **26**

Description of the Economy **27**
Demographics **27**
Employment and the Economy and Income **27**
Population/Workforce **27**
Cultural Features **28**
Schools 28
Churches 28
Cemeteries 29
Group Care Centers 29
Other Cultural Centers 29
Parks and Protected Lands 29
Correctional Facilities 30
Fire Protection/EMS 30
Law Enforcement 30
Hospital/Emergency Care 30
Historical Preservation **30**
Education and Technical Training Assets **32**
Business Climate **34**
Political Climate **35**

Site Competitiveness Metrics Summary 35
Site Competitiveness Report Card 36
Subject Site Key Facts 37
Site Competitiveness Opinion 38

Purpose and Use of Study 39
Purpose 39
Use 40
Site Advancement Decision 40
Site Improvement Investment Consideration 40
Site Marketing 40

Warranty 41

Appendices

Reference

Site Maps ..... A
About the Strategic Sites Inventory (SSI) Program ..... B
Site Parcel Ownership C
Monroe County Comprehensive Plan, City of Bloomington Comprehensive Plan, and more ..... D
IPaC Trust Resources ..... E
Environmental Reports for the Bill C. Brown Parcel ..... F
USDA, NRCS SSURGO Soil Report for Drainage Class, Hydrologic Soil Group, and Small Commercial Buildings. ..... G
EDR Radius Report and Historical Aerial Imagery ..... H
ESRI Business Summary I
SSI Phase II Questionnaire ..... J
SHAARD Report, Indiana Code 14-21-1 Relevant Sections, Indiana Archaeology Law Q&A ..... K
Monroe County Utility Infrastructure Information L
Duke Energy Site Readiness Program – Report for Bill C. Brown Parcel ..... M
2022 ALTA/NSPA Land Title Survey for Bill C. Brown Parcel ..... N
Various Roadway Designs and Conceptual Site Layouts ..... O

List of Maps (Appendix A)

Site Map
Vicinity Map
Site Parcel Configuration
Elevation/Slope
Land Cover
Potential Flood Hazard
NWI Potential Wetlands
SSURGO Soils
Site Access
Transportation Infrastructure
Energy Infrastructure/Utility Access
Travel Distance Major Markets
Cultural Features
Federal, State, and Local Parks and Protected Areas
Historic Resources

Strategic Sites Inventory (SSI) Program
Phase II: Preliminary Due Diligence

Bloomington Tech Park
Monroe County, Indiana
Site ID: 18105-001

SSI QUALIFIED SITE

Size and Location
Site: 179.4 acres
Buildable Area: 48.5 acres
I-69 at W. Fullerton Pike
Bloomington, IN 47403


Lat. 39.1298 Long. -86.5684


Current Ownership
Bill C. Brown
Busted Block LLC (Warren Cutshall, representative)


Highest and Best Use
R&D Technology Park
Business Park/Medical

Site GPA
3.5

Legend
- Site Location
- Rail
- Limited Access
- Major Highway
- State Highway
- Site Boundary
- Buildable Area
- County Boundary
- County Boundary

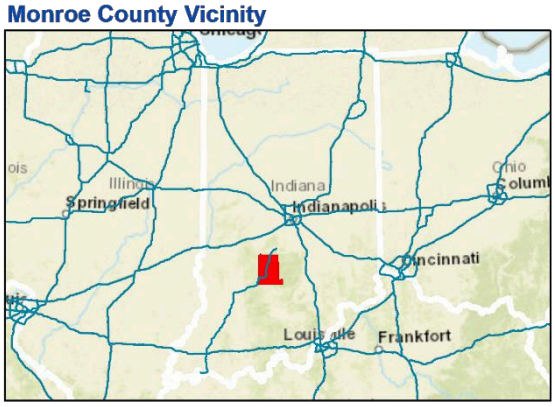Monroe County Vicinity

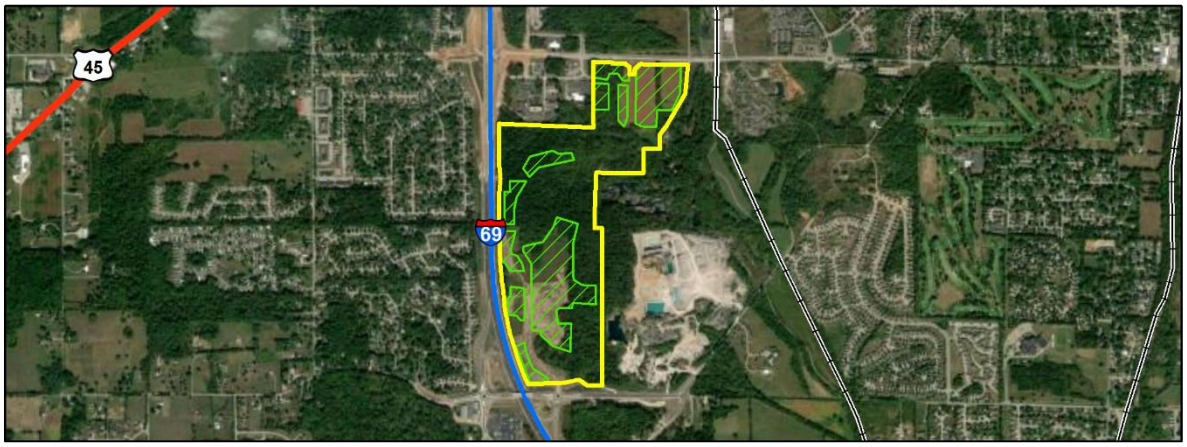

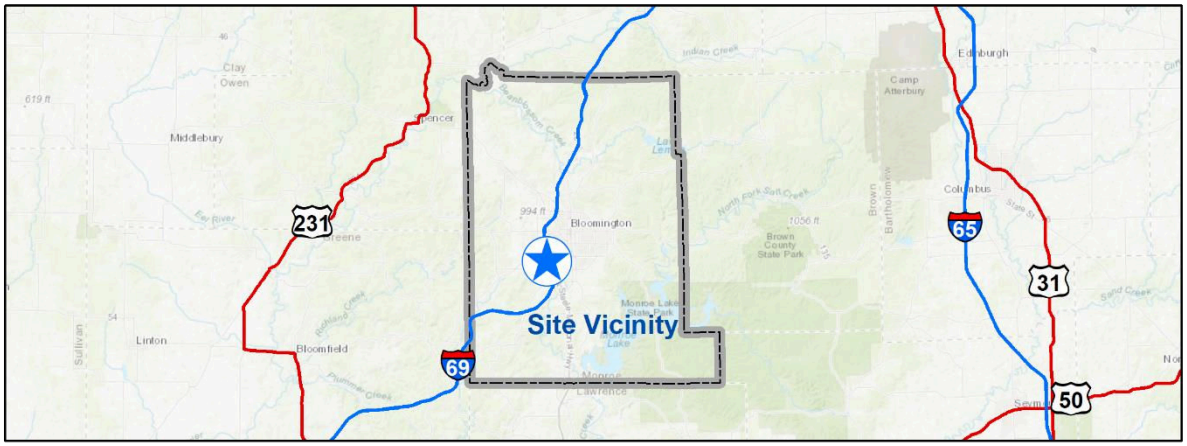
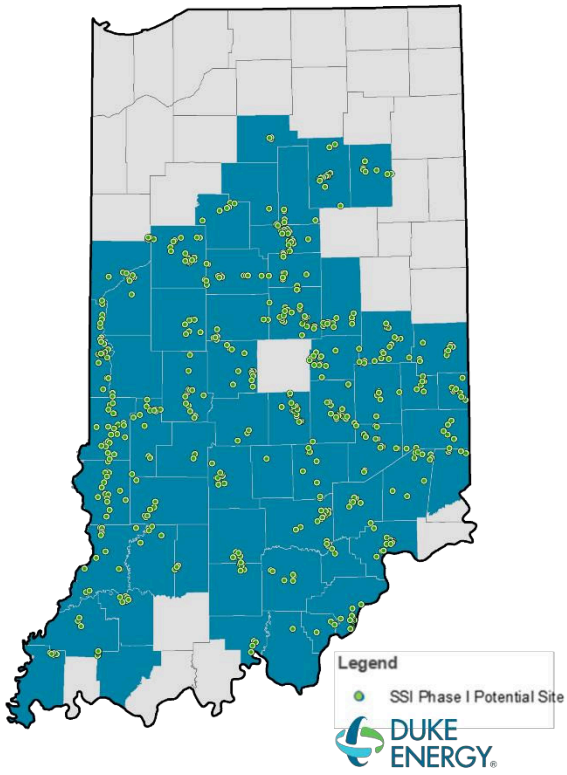


Introduction

This report presents the findings of the Strategic Sites Inventory (SSI) Phase II: Preliminary Due Diligence assessment of Site ID 18105-001 (referred to as the "Bloomington Tech Park"), a 179.4-acre greenfield property located in the City of Bloomington, Indiana. Bloomington is located in Monroe County and serves as the county seat. The Bloomington Tech Park was nominated for advancement to SSI Phase II by officials from Monroe County, the City of Bloomington, and Duke Energy. This SSI Phase II study has been funded by Duke Energy, an American electric power and natural gas holding company providing reliable and efficient energy to its served communities. *The subject site satisfies baseline quality criteria, aligns with Monroe County industry targets, and is deemed competitive to attract high-value business investments in support of sustainable community job growth and economic prosperity.* Report site maps are included as **Appendix A**.

SSI QUALIFIED SITE

The SSI Program is an advanced site selection initiative designed to develop an inventory of strategic real estate assets to attract quality job-creating business investments. In 2019, the Indiana Economic Development Corporation (IEDC) initiated the Strategic Sites Inventory (SSI) Program in the State of Indiana with *SSI Phase I: Site Discovery* for all 92 counties with a goal to increase economic development competitiveness at the community level by identifying new, top quality raw land sites ideally suited for industrial and commercial projects. Monroe County was included in the initial IEDC-funded project, which identified potential sites for large-scale and heavy-industrial uses. A subsequent 2020 effort expanded the search to include light-industrial and agribusiness opportunities. The Bloomington Tech Park was advanced from that work as a light-industrial and R&D technology park alternative. The subject site exhibits necessary competitive characteristics for SSI Phase II: Preliminary Due Diligence nomination. Details about the SSI Program phases are provided in **Appendix B**.



LEOTTA LOCATION + DESIGN

Leotta Location and Design (LL+D) has developed a systematic and effective methodology for screening potential sites for practical development as part of the SSI Phase II process. LL+D's site screening methodology is informed by fifteen-plus years of industrial and commercial site selection experience and

economic development consulting in conjunction with demonstrated geospatial technology-based analysis and mapping expertise. LL+D staff and consulting partners include environmental science, civil and geotechnical engineering, landscape architecture, geospatial technologies, and economic development experts who combine disciplines to identify and evaluate sites for industrial and commercial project uses.

The purpose of the SSI Phase II study is to provide a quantitative understanding of the subject site's advantages and challenges, and to identify the measures needed to improve site functional use and mitigate development challenges. The SSI Phase II study is a desktop-based preliminary engineering and environmental due diligence exercise performed by discipline-specific experts with experience in industrial and commercial site selection and property development. Study of the subject site's physical and surrounding characteristics, assets, and impediments for development are reviewed in sufficient detail to formulate a defendable opinion on the competitive strength of the property for an economic development use.

The SSI Phase II study is intended to expose any potential "fatal flaws" that indicate significant development encumbrances or grossly compromise site competitiveness. The desktop review relies on an array of engineering, environmental, ecological, and cultural GIS data in conjunction with aerial imagery and available public records to assess current site development advantages and challenges. The SSI Phase II assessment concludes with the formulation of recommended actions for improving site functional use and mitigating any potential development challenges.

LL+D's team of site selection and economic development experts provided an in-depth study of the subject site through an objective measure of physical features and surrounding characteristics and conditions across engineering, environmental, ecological, and cultural concerns. Overall site competitiveness for an economic development land use is made within the context of location requirements for permitting, construction, and operations relevant to the intended site project land use.

The SSI Phase II findings are expressed along three principal site assessment parameters:

Condition of the site's physical characteristics including assessment of engineering and environmental development advantages and challenges.

Connection to transportation assets, utility infrastructure, and major market areas.

Community support including available workforce, cultural feature impacts, and business climate for economic development.

A description of the subject site and summary of SSI Phase II findings is provided below.

Site Description

The Bloomington Tech Park is an undeveloped (greenfield) property located adjacent to Interstate 69 (I-69), with West Tapp Road to the north and West Fullerton Pike to the south. It lies within the municipal

limits of the City of Bloomington, Indiana. The subject site comprises two tax parcels independently owned by two landowners of record: Bill C. Brown Revocable Trust and Busted Block LLC. The Busted Block parcel is mapped as two GIS tracts, which is why three tracts appear in the site mapping. County property records identify approximately 98.32 acres for the Busted Block LLC parcel and 87.12 deeded acres for the Brown Trust parcel; the 2022 ALTA/NSPS Land Title Survey reports 87.38 surveyed acres for the Brown Trust parcel. The project GIS measures the Busted Block parcel at approximately 98.5 acres, which closely aligns with the county parcel acreage, but measures the Brown Trust parcel at approximately 80.9 acres. The resulting GIS study boundary totals approximately 179.4 acres. The GIS study acreage is used for the planning-level spatial analyses in this report; recorded and surveyed acreage should govern title, conveyance, final boundary determination, and engineering design. **Appendix C** provides the county parcel records, and **Appendix N** provides the 2022 ALTA/NSPS survey of the Brown Trust parcel.



Site ID 18105-001 south view from W Fullerton Pike


Current site condition is characterized by predominantly forested land (approximately 76 percent tree cover), with the balance in open space/rangeland. The property has historically been used for agriculture, including pastureland and row crop production, timbering, and quarry operation on a small portion of the site. There are no known structures currently observed within the site boundary. Based on aerial photography, the southern portion of the subject site may have most recently been utilized as a staging area for equipment during the construction of Interstate 69. General land use surrounding the site includes forested and residential lands to the north, agricultural and residential lands to the south, and residential lands to the west across I-69 and to the east across Rockport Road. A limestone quarry operation also exists directly east of the site. Adjacent to the site's northwestern corner is a small medical park. Commercial or residential activity near the site is adequately buffered from site operations and presents no significant impact for the intended project land uses. The cultural setting is urban, as the site lies within the municipal limits of the City of Bloomington, one of Indiana's ten largest cities.

A noncontiguous buildable area was defined within the subject site boundary to identify the portions considered most advantageous for construction at a preliminary planning level. The GIS analysis identified approximately 48.5 acres of potentially buildable land. Of that total, approximately 23.9 acres are located on the Bill C. Brown Revocable Trust parcel and approximately 24.6 acres are located on the Busted Block LLC parcel. The buildable area is divided into ten Potential Areas of Development (PADs) ranging from approximately 2 acres to 16.2 acres. The PADs are separated by the proposed connector road between West Tapp Road and West Fullerton Pike, Conservancy and Karst Easements, topography, and other mapped development constraints.

Geographic Location

Located in South Central Indiana, Monroe County provides an ideal urban setting surrounded by pristine forest and nature reserves. The county is located just outside the Indianapolis metropolitan area. It is situated along the high-commercial activity I-69 corridor with access to major markets throughout the state. The I-69 corridor connects Indianapolis, IN to Detroit, MI and Nashville, TN. *In direct linear measure, the site is situated approximately 38 miles southwest of Indianapolis, IN; 72 miles northwest of Louisville, KY; 101 miles west of Cincinnati, OH; 111 miles southeast of Champaign, IL; 147 miles southwest of Fort Wayne, IN; 182 miles southeast of Chicago, IL; 190 miles west of Columbus, OH; and 198 miles east of St. Louis, MO.* Projects considering the Bloomington Tech Park will benefit from locating in a community strongly embedded in economic growth and prosperity amongst a primary network of connectivity while avoiding the heavy traffic congestion and higher land costs typical of more heavily urbanized areas. Access to surrounding labor markets at competitive wage rates is well within reach of the subject site. A map of site proximity to major metropolitan areas is provided in **Appendix A**.

The subject site is located within the municipal limits of the City of Bloomington, which has a 2022 estimated population of 79,107. The site is located within the tax district of Perry Township, one of eleven townships in Monroe County. The City of Bloomington serves as the county seat for Monroe County, which has an estimated county population of 139,745. *More than 337,100 total residential population live within a 45-minute drive of the site. Approximately 28,146 businesses employing 454,205 people are located within a 60-minute travel time.* Construction, manufacturing, and professional, scientific, & technical services account for 18.9% of businesses employing 28.3% of total workforce within a 60-minute drive of the site. A site vicinity map is provided in **Appendix A**.

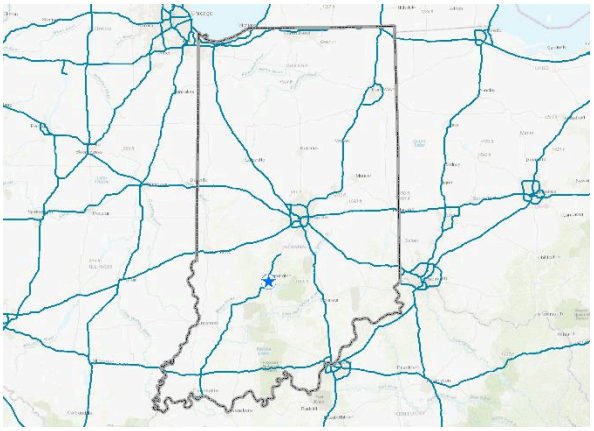

Site ID 18105-001 Site Vicinity

Current Ownership

The subject site consists of three contiguous mapped tracts across two tax parcels. *The owners of record are Busted Block LLC, represented by Warren Cutshall, and the Bill C. Brown Revocable Trust.* The two Busted Block GIS tracts measure approximately 91.0 and 7.5 acres, for a combined GIS area of approximately 98.5 acres; this closely aligns with the approximately 98.32-acre county parcel record. The Brown Trust tract measures approximately 80.9 acres in the project GIS, while the 2022 ALTA/NSPS survey reports 87.38 acres. The report's approximately 179.4-acre study total therefore reflects the GIS study boundary, and the principal acreage discrepancy is associated with the Brown Trust parcel boundary in GIS. Recorded and surveyed acreage should govern title, conveyance, and final boundary determination. Report materials state that as of 2024, the Brown Trust parcel was being offered for sale and the Busted

Block owner would consider a sale given an acceptable price and opportunity. As of the report date, no purchase-option agreement was identified for either parcel. *LL+D recommends securing purchase-option agreements with both landowners to reduce uncertainty regarding property availability and pricing.* A Site Parcel Configuration map is included in **Appendix A**.

Findings Summary

The findings from the SSI Phase II study are summarized below. A discussion of key site development considerations is provided within the context of overall site physical **condition**, **connection** to infrastructure, and **community** support. LL+D's site competitiveness assessment across these key site development parameters are presented below.

Condition

Site conditions are defined as the physical characteristics of the subject property including geometric configuration, surface features, engineering, ecological and environmental concerns, and land use compatibility. *Overall, conditions for the Bloomington Tech Park are favorable for development for the site's highest and best use as an economic development real estate asset*.

Size and Configuration of the subject site is sufficient in both acreage and configuration to support an *R&D Technology Park or a Business Park/Medical operation. Total site area is approximately 179.4 acres, measuring approximately 2,474 feet across an east-west axis at its widest point and approximately 4,991 feet across a north-south axis*. The site's buildable area is divided into separate PADs due to an irregular geometrical configuration as well as challenges with topography, streams, and conservation/karst easements. The eastern site boundary is bordered by multiple different limestone quarries. Interstate 69 (I-69) runs along the site's western boundary, providing approximately 4,150 feet (0.78 miles) of interstate frontage. The site's northern boundary is adjacent to W Tapp Rd and a small medical park. The southern boundary is adjacent to W Fullerton Pike and a stone supplier called C & H Stone Co.

A noncontiguous buildable area totaling approximately 48.5 acres was identified through a planning-level GIS analysis. Approximately 23.9 buildable acres are located on the Bill C. Brown Revocable Trust parcel, and approximately 24.6 buildable acres are located on the Busted Block LLC parcel. The analysis considered mapped karst features and associated easements, required setbacks, slopes and elevation contours, the proposed internal roadway alignment, mapped potential wetland areas, soil drainage characteristics, and typical facility sizing and configuration. The 2022 ALTA/NSPS Land Title Survey and other project-specific studies supplied parcel, easement, and resource information beyond the higher-level GIS datasets. The buildable area consists of ten separate PADs, with the two largest measuring approximately 13.9 acres in the northern portion and 16.2 acres in the southern portion. Six PADs are located on the southern portion of the site adjacent to I-69, and four PADs are located at the northern end adjacent to the existing medical park. Potential access points are located along West Tapp Road and West Fullerton Pike, with a proposed roadway connecting the two corridors through the center of the site. This exercise was not performed at an engineering-design level; the resulting buildable acreages are

planning-level approximations based on available mapping and development experience and should be refined through project-specific boundary survey, civil engineering, geotechnical investigation, karst evaluation, and wetland review. Relevant survey information is provided in **Appendix N**.

Hydrography and Flood Risk were evaluated by consulting USGS National Hydrography Dataset (NHD), a geospatial database which identifies stream segments or reaches that make up the nation's surface water drainage system, and FEMA National Flood Hazard Layer (NFHL), a geospatial database that contains current effective flood hazard data. *Based on a review of National Flood Hazard Layer data, the site and buildable area have low mapped flood risk. Approximately 0.28 acre of the subject site lies within the mapped FEMA flood hazard area. Nearly all remaining site acreage is mapped as Zone X and lies outside the 1-percent-annual-chance floodplain. The mapped flood-hazard area is outside the defined buildable area and is not anticipated to materially constrain development. The landowner questionnaire in Appendix J reports no floodplain on the site; the mapped FEMA data govern this assessment.*

The USGS NHD shows multiple recorded/observed hydrography features onsite. These are concentrated to the southeast and the northern central portions of the site. These features limit the buildable area but will likely not be an issue since the PADs are removed from the features. Surface water runoff from the subject site discharges to Clear Creek, which is within the East Fork of the White River Basin. The Bloomington Unified Development Ordinance requires riparian buffers where intermittent or perennial streams are present, consisting of three graduated zones — Streamside, Intermediate, and Fringe — each a minimum of 25 feet in width, measured outward from the stream centerline: 75 feet on each side of the stream, an approximately 150-foot total corridor. Within the Streamside zone, no alterations of forest understory may occur, except for the removal of nonnative or invasive species. A hydrography and FEMA flood hazard map is provided in **Appendix A**. Additional details and riparian buffer design standards are outlined in Section 20.04.030, Subsection F, of the UDO, included in **Appendix D**.

Potential Wetlands are interpolated through observation of multiple data inputs including:

1) U.S. Fish and Wildlife Service National Wetlands Inventory (NWI) – developed for non-404 jurisdictional wetland mapping, so must be understood to have limited accuracy
2) LiDAR-derived digital elevation model (DEM) – topography/elevation
3) USGS NHD – hydrography
4) NRCS SSURGO – soils data provides hydric rating
5) Color-infrared imagery (where available) – for visual indication of wet or inundated areas (consulting differing years to ensure wet areas are not the result of a period flood event)

The NWI data is consulted as the principal indicator of potential wetlands, as the mapping methodology utilizes the above-referenced inputs in addition to other data sources in conjunction with qualified scientific review and quality control of interpolated wetlands delineation and taxonomy. The NWI data also provides a delineation of wetland types, which is important in the estimation of permitting burden and potential compensatory mitigation costs. Additional data sources are consulted to ensure congruency of information suggestive of potential wetlands occurrence.

From the US EPA Wetland Regulatory Authority fact sheet, wetlands subject to Clean Water Act Section 404 are defined as “areas that are inundated or saturated by surface or ground water at a frequency and

duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in saturated soil conditions. Wetlands generally include swamps, marshes, bogs, and similar areas." There are three primary conditions required for surface areas to be considered wetlands: 1) at least periodically, the land supports predominantly hydrophytes, 2) the substrate is predominantly undrained hydric soil, and 3) the substrate is saturated with water or covered by shallow water at some time during the growing season of each year. As determined by the U.S. Army Corps of Engineers, the federal agency responsible for enforcing federal laws protecting wetlands, an area must exhibit all three of the above-referenced conditions to be considered a wetland.

The following GIS-based information was consulted for the desktop wetlands assessment:


- **Hydrophytic Vegetation**: Recent and historical aerial imagery and NWI data.
- **Wetland Hydrology**: LiDAR-derived DEM, USGS topo maps, and high-resolution aerial imagery.
- **Hydric Soils**: NRCS Web Soil Survey and SSURGO data.

There are approximately 0.96 acre, or 0.5 percent of the site, of NWI-mapped potential riverine wetland on the subject property. The mapped feature is in the northern portion of the site along an east-west drainage and lies outside the defined buildable area. NWI data are screening-level information and do not establish federal or state jurisdiction. Wetland or stream permitting and mitigation may be required if a project affects mapped or field-identified aquatic resources. Based on the current buildable-area configuration, the NWI-mapped feature is not expected to create a material development constraint. The NWI potential-wetlands map is provided in **Appendix A**.

VET Environmental Engineering, LLC (VET) prepared a Wetlands and Jurisdictional Waters Delineation report for the Brown Trust parcel in September 2022. The purpose of the report was to delineate potential wetlands and jurisdictional waters identified during the 2022 Phase I ESA and site reconnaissance. Based on field investigations, VET identified six regulated wetlands comprising 0.903 acres and 25 jurisdictional streams comprising 7,021 linear feet. The report's Conclusions state that approximately 0.858 acres of regulated wetlands and approximately 1,569 linear feet of jurisdictional waters lie outside the boundaries of existing conservancy and karst easements; the Executive Summary states these quantities as 0.89 acres and 1,570 linear feet. *These aquatic resources lie outside the buildable areas defined in this report and are not expected to materially constrain the current PAD configuration, although any future disturbance would be subject to applicable jurisdictional review, permitting, and mitigation requirements.* VET's field investigation also identified six potential karst features not previously identified through desktop reconnaissance: two within the Karst "B" easement and four outside all existing conservancy and karst easements. These features are relevant to PAD placement and reinforce the karst-survey recommendations in the Sinkholes section. Relevant portions of the Wetlands and Jurisdictional Waters Delineation are provided in **Appendix F**.

Soils conditions are assessed to identify potential advantages and/or challenges that could have an impact on site design, construction, and overall use of the site. Soil types are evaluated with respect to drainage and engineering performance for excavations, road construction, and building foundation support. Additionally, hydric soil ratings are used in conjunction with wetlands data to increase confidence in potential wetlands interpretation (reported in previous section).

According to the United States Department of Agriculture (USDA), Natural Resources Conservation Service (NRCS) Soil Survey Geographic Database (SSURGO), 39.8 percent (71.4 acres) of the subject site consists of Crider silt loam, 6 to 12 percent slopes, classified as well drained. An additional 33.1 percent (59.5 acres) is classified as well drained and includes Crider silt loam, 2 to 6 percent slopes; Caneyville silt loam; and Hagerstown silt loam. A further 4.4 percent (7.9 acres) consists of Udorthents-Pits complex, for which SSURGO provides no drainage-class rating. Bedford silt loam, 2 to 6 percent slopes, is moderately well drained and covers approximately 19.0 percent (34.1 acres) of the site. Wakeland silt loam is somewhat poorly drained and covers approximately 3.8 percent (6.9 acres) of the site. *Accordingly, only 3.8 percent of the site is mapped as somewhat poorly drained; the small-commercial-building limitation discussed below is a foundation-suitability rating and should not be characterized as a drainage limitation.*

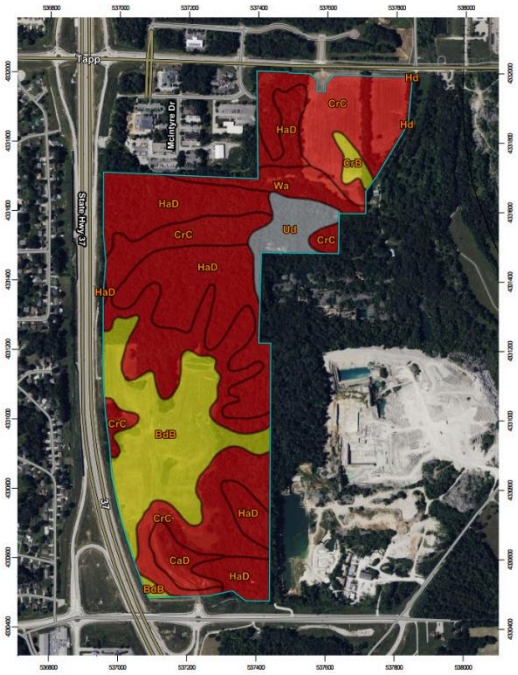

SSURGO Small Commercial Building Rating "Somewhat to Very Limited"


Soil suitability properties for small commercial building construction across 75.5% (135.5 acres) of the subject site are indicated as "Very limited" for shallow (2-feet deep) reinforced concrete spread footings. A smaller portion (20.2% - 36.2 acres) of soils within the site boundary are indicated as "Somewhat Limited" for small commercial building construction. *Substantial foundation requirements may not be supported by site soil conditions and must be determined through on-site geotechnical engineering investigation. The limitations can be overcome or minimized by special planning, design, or installation.*

A SSURGO soils map is provided in **Appendix A**. The USDA, NRCR SSURGO soil reports for drainage class, hydrologic soil group, and small commercial buildings are provided in **Appendix G**.


Elevation/Topography moderate grading challenges to prepare the site for development. *Based on a review of 5-meter cell size, LiDAR-derived digital elevation models (DEM) for the full site extent, a minimum elevation of 702 feet mean sea level (MSL) and a maximum elevation of 823 feet MSL are reported. The DEM indicates an average buildable area elevation of approximately 772.4 feet MSL and an average slope of 4.5 percent.*

The site has moderate topography with gentle sloping to the south and southwest, and significant sloping to the east and north. The lowest elevation occurs to the northeast in a wetland stream area; the central and southern portions of the site generally have higher elevation and less slope. With the hilly topography, there are potentially cut-fill opportunities for use of onsite fill for grading/leveling. This analysis is subject to an onsite geotechnical engineering investigation to determine suitability of soil properties for construction. Additionally, any areas of naturally occurring sloping topography may provide passive

locations for site buildable area drainage and stormwater retention. A LiDAR-derived DEM and 10- foot contour map is provided as **Appendix A**.

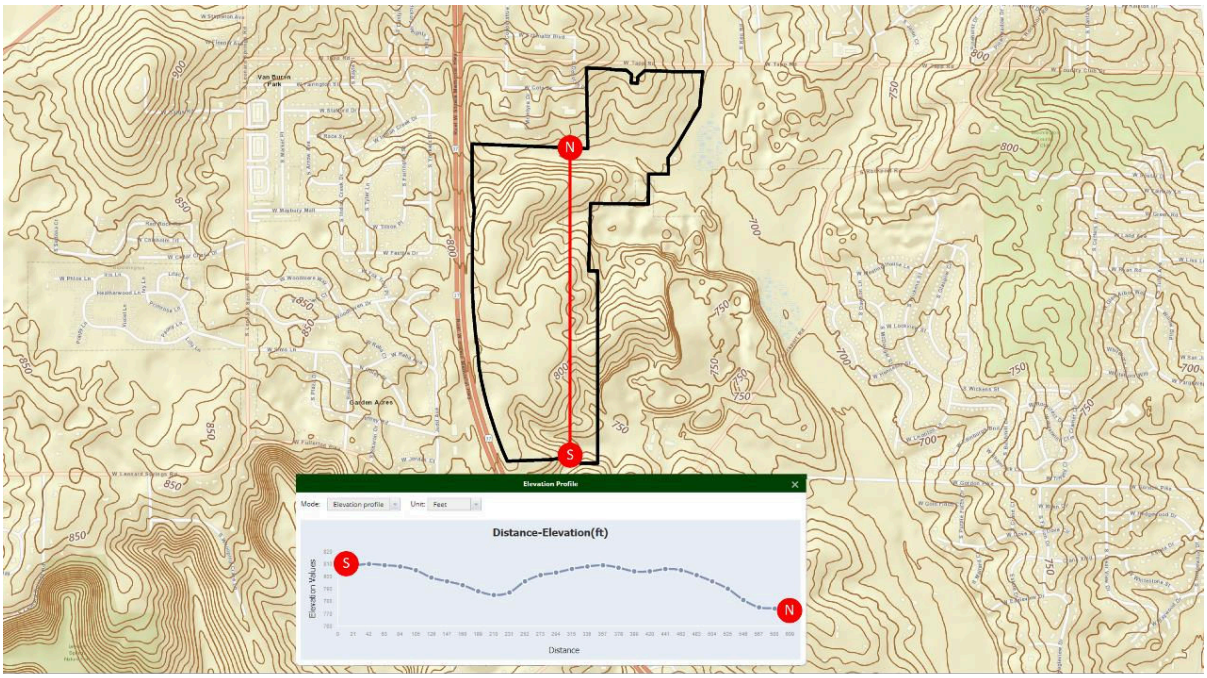

18105-001 Elevation Profile South-North (USGS 3DEP Viewer)

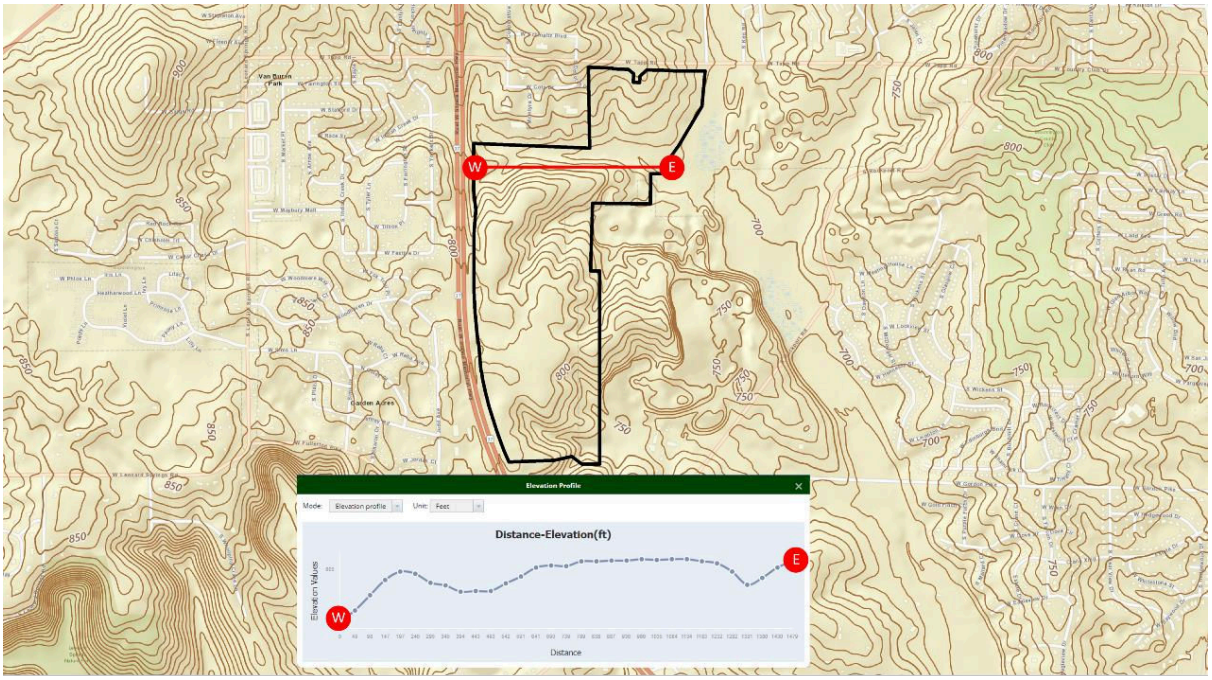

18105-001 Elevation Profile West-East (USGS 3DEP Viewer)

Sinkholes are common geological phenomenon occurring throughout the United States. They are only one of many kinds of karst landforms, which include caves, disappearing streams, springs, and underground drainage systems. Karst is a generic term which refers to the characteristic terrain produced by erosional processes associated with the chemical weathering and dissolution of limestone or dolomite.

The Sinkhole Areas and Sinking-Stream Basins Map developed by the Indiana Geological Survey shows the locations of sinkhole areas (SHA) and sinking-stream basins (SSB) in southern Indiana. Southern Indiana has several well-developed areas of karst landscape. The Mitchell Plateau, located in south-central Indiana, is one of the most iconic karst landscapes in the United States. The region is a low, broad plateau that is partially eroded by deeply incised stream systems. Some sinkholes may exist outside the delineated areas, and some sinkholes may exist within the areas designated as sinking-stream basins, but such areas are not shown in this map.

According to the Indiana Geological and Water Survey sinkhole-area mapping, approximately 12 acres in the western portion of the subject site fall within a mapped sinkhole area. A field Karst Survey completed for the Brown Trust parcel identified nineteen sinkholes, and VET's 2022 field investigation identified six additional potential karst features, including four outside existing easements. The 2022 ALTA/NSPS survey depicts recorded Conservancy and Karst Easements across the Brown Trust parcel, outside the defined buildable areas. No comparable field karst survey is available for the Busted Block parcel at this time.

A Karst Survey prepared by Hydrogeology, Inc. in November 2022, covering the Brown Trust parcel (the southern portion of the site, approximately 87.4 surveyed acres), provides further information: "A desktop review and field survey were conducted at the Site to identify any karst features. Nineteen sinkholes were identified at the Site. All sinkholes should have a 25-ft or 50-ft KCE and be protected with erosion and sediment control measures throughout the entire construction process. The karst field survey was limited to surface inspection with no subsurface investigation. Unknown karst features are possibly present in the subsurface at the Site. Dense vegetation was present in areas of the Site, which prevented close ground inspection in those areas. Removal and mounding of soil have occurred over approximately 19 acres of the site, which could have removed the surface expression of karst features. If a previously unknown karst feature is discovered during construction activities the feature should be protected with erosion and sediment control measures and inspected by a karst specialist. Mitigation recommendations for each sinkhole are based on City of Bloomington Unified Development Ordinance, Chapter 20.04.030, Subsection G. The boundaries for all Karst Conservancy Easements should be based on the topographic survey for the Site, which has not been completed." The Hydrogeology report refers to a "25-ft or 50-ft KCE." The City of Bloomington UDO specifies a 25-foot Karst Conservancy Easement measured from the last closed contour of an individual or compound karst feature, together with a 10-foot structure setback. The source of the report's 50-foot alternative is not identified in the cited ordinance; therefore, the applicable easement width must be established from the recorded easement documents and the City UDO during project design. The Conservancy and Karst Easements encumbering the Brown Trust parcel were granted by the Bill C. Brown Revocable Trust to the City of Bloomington, dated August 17, 2015, and recorded August 18, 2015 as Instrument No. 2015011604 in the Office of the Monroe County Recorder. Their boundaries are depicted on the 2022 ALTA/NSPS survey provided in **Appendix N**.

The subject site lies within the municipal limits of the City of Bloomington; therefore, the City of Bloomington Unified Development Ordinance is the controlling local development standard for karst features on the property. Monroe County also maintains regional karst and sinkhole development standards in Chapter 826, "Karst and Sinkhole Development," of the Monroe County Development Ordinance adopted December 18, 2024. The county standards are mentioned as regional technical context and are not identified as the governing ordinance for this in-city site. Relevant sections of the City of Bloomington UDO are provided in **Appendix D**.

Land Cover assessment is useful for identifying site design constraints and/or potential encumbrances that may be encountered during site development such as extensive clearing and grubbing, drainage concerns, etc. The vegetative cover type is used in conjunction with soil types, elevation, and hydrography data for interpretation of environmentally sensitive conditions such as wetlands and potential habitat for Threatened and Endangered (T&E) species and other species of concern (discussed later in this report). Certain land cover features may reveal commercial value of forested areas or be desirable to incorporate into the site design. Features such as densely wooded areas may provide a desirable buffer during construction and/or during facility operations for line of sight and noise control. Another example is integrating wetland areas into site plans, thus providing an element of design aesthetics.

Two primary sources were used to assess land cover characteristics:


1) *Recent high-resolution color aerial imagery* (ESRI/Google Earth 2022). Recent and past aerial imagery provide useful observational data for assessing current land cover conditions, as well as any notable changes over time. However, aerial imagery alone cannot be used without additional data sources to provide a more specific delineation of land cover type. For example, densely wooded areas are readily observed from aerial imagery, however, determination of forest composition is largely indeterminate without other remotely sensed inputs (i.e., color infrared imagery) or ground-based observation.

2) *The Esri Indiana 2017–2021 Land Cover product,* a 10-class land cover dataset (Water, Trees, Flooded Vegetation, Crops, Built Area, Bare Ground, Snow/Ice, Clouds, Rangeland) derived from satellite imagery and published for Indiana. The acreage and percentage tabulations reported for the site and buildable area in this section were computed from this dataset, and its classes correspond to the land cover map provided in Appendix A.


A Land cover map is provided in **Appendix A**.

Based on a review of the Esri Indiana 2017–2021 Land Cover dataset, land cover for the site and buildable area consists of the following classified areas (acres, percent cover):

Land Cover – Entire Site (acres, %)

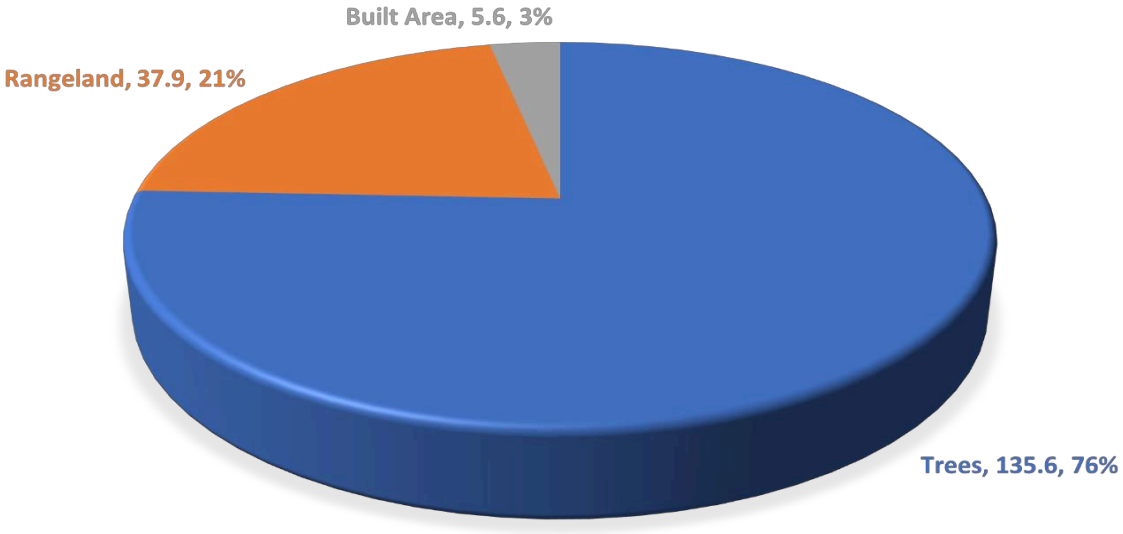

Land Cover – Buildable Area (acres, %)

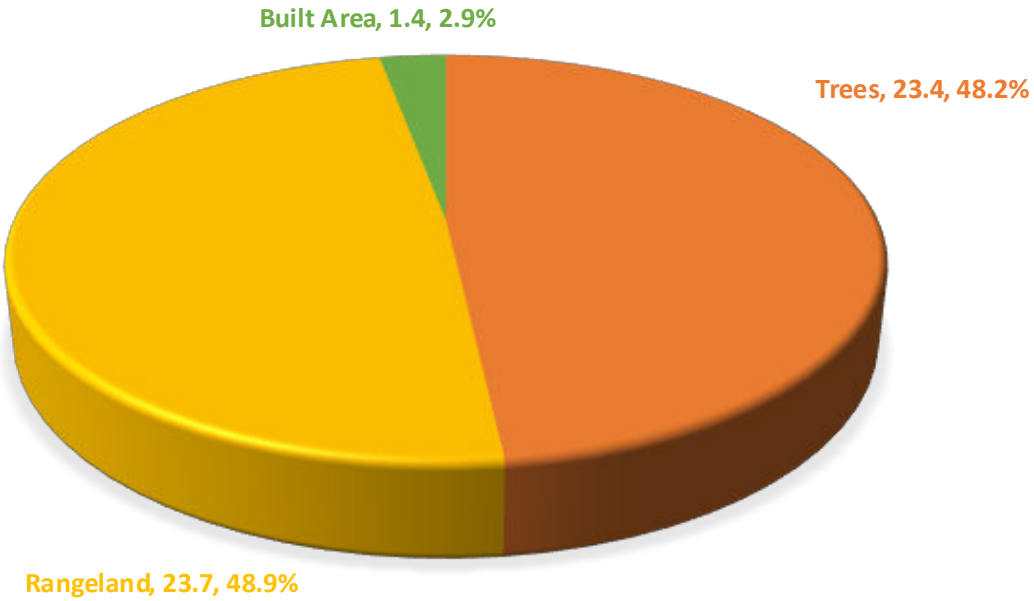

According to the Bloomington Unified Development Ordinance (UDO), a minimum vegetation canopy must be retained on areas with existing canopy coverage. The retention requirement is set by UDO Table 04-8, which assigns a retention multiplier based on each property's baseline canopy percentage: 0.50 for a baseline of 80–100 percent, 0.60 for 60–79 percent, 0.70 for 40–59 percent, 0.80 for 20–39 percent, and 0.90 for 0–19 percent. *Based on the baseline canopy percentage under Table 04-8, the Brown Trust parcel requires preservation of approximately 70 percent of its existing forested area, while the Busted Block parcel requires 50 percent canopy cover retention. The site as a whole is approximately 76 percent tree-covered, but each parcel's baseline canopy band should be verified independently.* The Bloomington UDO is included in **Appendix D**.

Table 04-8: Minimum Required Vegetation Canopy

Baseline Canopy Cover	Retained Canopy Cover
80—100%	0.50 × Baseline canopy cover
60—79%	0.60 × Baseline canopy cover
40—59%	0.70 × Baseline canopy cover
20—39%	0.80 × Baseline canopy cover
0—19%	0.90 × Baseline canopy cover

Example:

For a property of 20 acres with 50 percent canopy cover (i.e., 10 acres), a development would be required to maintain at least seven acres (10 acres × 0.70) of canopy cover.

Zoning and Land Use is administered and governed by the City of Bloomington Unified Development Ordinance. *According to the SSI Phase II Questionnaire completed by the landowner and the City of Bloomington Official Zoning Map, the site currently includes a single zoning district: Mixed-Use Employment (ME). The 2018 Bloomington Comprehensive Plan future land use map calls for all site parcels to be designated "Employment Center".* A City Zoning Map and Future Land Use Map is provided in **Appendix D.**

The apparent current land use of the subject site is derived from the SSI Phase II Questionnaire, recent aerial imagery, and Google Street View. *According to the questionnaire, completed by the landowner, the current use of the site is described as agriculture and recreation. Recent aerial imagery shows open, cleared ground on portions of the site consistent with pasture or row-crop use, with no commercial structures present; the majority of the site is forested. These aerial observations are consistent with the land use reported in the questionnaire.*

Current land use immediately surrounding the subject site consists of forested and residential lands to the north, agricultural and residential lands to the south, residential lands to the west across I-69, and residential lands to the east across Rockport Road. To the northeast is a residential area that includes churches, an assisted living center, a school, and a historic venue. A limestone quarry operation is directly adjacent to the site to the east. A small medical park is located adjacent to the site's northwestern corner.

Land uses within the site boundary across the historical aerial imagery series, which spans 1939 to 2020, include agriculture, forested land, and a small quarry operation. Fifteen epochs from 1939 to 2020 were reviewed to determine the sequential occupancy of the subject site. Since 1939, cleared portions on the subject site have been consistently used for agriculture. Between 1952 and 1955, a quarry operation was constructed and functioning on a portion of the site near the eastern boundary. It appears that the quarry ceased operation at some point after 1965, though historical aerial images do not clearly indicate the specific year. A small section of cleared area was undisturbed for reforestation by 1977, and the majority of onsite forested areas have remained in place throughout the series of images. The landowner has stated that timbering took place on the property in the past in addition to farming and quarrying. Historical aerial imagery is included in the EDR Radius Report provided as **Appendix H**.

Current site land use is suitable to support future development of the site for R&D tech and business park/medical land uses. Surrounding tract land use is primarily compatible with the intended site use immediately around the buildable area. While residential areas exist nearby, along with the churches, assisted living center, school, and historic venue to the northeast, adequate buffer should mediate any development objections if necessary. The medical park adjacent to the site at the northwest corner should not serve as an impediment to development given the stated target land uses. The adjacent C & H Stone quarry to the east is an active mining operation, and companies involved in vibration-sensitive manufacturing may need to evaluate potential impacts from blasting and heavy equipment. This can typically be mitigated through building design and construction at the discretion of the developer.

The nearby future land use is indicated from the 2018 Bloomington Comprehensive Plan to be Employment Center, Parks/Open Space, and Neighborhoods Residential. *Tracts surrounding the subject site, and especially the buildable area, should be considered for rezoning with uses that are compatible with the intended commercial/industrial uses of the site. Compatibility with surrounding land use is vital to preserving the competitiveness of the site for an economic development use by preventing encroachment of land uses that would create real or perceived risk to prospective business considering the site for development.*

The City of Bloomington 2019 Transportation Plan proposes a future connector road running north-south through the center of the site from W Tapp Rd to W Fullerton Pike. The proposed road is a Neighborhood Connector Street type and includes a bike lane and multiuse path. The road would at minimum be required to match the parameters of S Vanguard Way to the north across W Tapp Rd. City officials have stated that if the site is developed for a different employer on each respective property (the Brown Trust parcel and the Busted Block parcel), and the roads do not connect, the City of Bloomington will ask that space is left for the roads on each property to connect in the future as part of the site plan approval. Officials have also stated that the developer of the property is responsible for building the road. Proposed road network maps and details about design parameters can be found in the 2019 City of Bloomington Transportation Plan, included as **Appendix D**.

According to the Bloomington Unified Development Ordinance (UDO), an estimated 50% of tree cover on the northern property (owned by Warren Cutshall) and approximately 70% of tree cover on the southern property (owned by Bill C Brown) must be preserved as retained canopy cover. The city has stated that

sustainability and retaining trees is a priority of the community. Where contiguous areas of at least one-half acre of tree cover are required to be preserved, a conservancy and/or tree preservation easement is required per Section 20.05.040 of the UDO. The edges of such easements shall be delineated 10 feet beyond the driplines of the trees to be preserved. Section 20.04.030, Subsection I, outlines further details regarding tree and forest preservation. The Bloomington UDO is included in **Appendix D**.

The Bloomington UDO requires that all perennial or intermittent streams be protected by a riparian buffer composed of three distinct zones — Streamside, Intermediate, and Fringe — each a minimum of 25 feet wide measured outward from the stream centerline on either side: 75 feet on each side of the stream, an approximately 150-foot total corridor. The ordinance permits specified disturbance within the buffer subject to approval by the City of Bloomington Planning and Transportation Department, including utility installation where no alternative exists, street crossings, bicycle and pedestrian crossings, and permeable-surface trails within the Streamside zone; stormwater management facilities within the Intermediate zone; and streets where no reasonable alternative route exists within the Fringe zone. Additional details and riparian buffer design standards are outlined in Section 20.04.030, Subsection F, of the UDO, included in **Appendix D**.

Relevant excerpts from the City of Bloomington 2019 Transportation Plan, the 2018 City of Bloomington Comprehensive Plan, the 2012 Monroe County Comprehensive Plan, and the Bloomington Unified Development Ordinance prescribing zoning and land use polices, standards, restrictions, and statutory requirements for land development are included in **Appendix D**. Officials from the City of Bloomington Planning & Transportation Department should be consulted for detailed requirements pertaining to land use and zoning district designations.

Threatened and Endangered Species are defined under the federal Endangered Species Act (ESA) of 1973. The ESA provides a program for the conservation of threatened and endangered (T&E) plants and animals and the habitats in which they are found. The lead federal agencies for implementing ESA are the U.S. Fish and Wildlife Service (USFWS) and the U.S. National Oceanic and Atmospheric Administration (NOAA) Fisheries Service. The USFWS maintains a worldwide list of endangered species. Species include birds, insects, fish, reptiles, mammals, crustaceans, flowers, grasses, and trees.

The ESA defines an *endangered species* as "any species which is in danger of extinction throughout all or a significant portion of its range." Endangered species are automatically protected by prohibitions of several types of "take," including harming, harassing, collecting, or killing, under Section 9 of the ESA. There are some limited exceptions to these rules listed in Section 10 of the ESA. The ESA defines a *threatened species* as "any species which is likely to become an endangered species within the foreseeable future throughout all or a significant portion of its range." Threatened species receive protections through separate regulations issued under Section 4(d) of the ESA.

LL+D staff consulted the USFWS Information for Planning and Consultation (IPaC) online tool (https://ipac.ecosphere.fws.gov/) to assess potential project effects on listed species and other USFWS trust resources. A listed species is a plant or animal that receives federal protection under the Endangered Species Act, either as endangered or as threatened. USFWS trust resources include migratory birds, species listed as threatened and endangered under the Endangered Species Act, interjurisdictional fishes,

marine mammals, wetlands, and lands managed by USFWS, such as national wildlife refuges. The IPaC tool is a project planning tool that streamlines the USFWS environmental review process.

An IPaC Resource List was generated for the subject site. The Resource List is a report that automatically generates a list of species and other resources such as critical habitat (collectively referred to as trust resources) under USFWS jurisdiction that are known or expected to be on or near the project area referenced below. The list may also include trust resources that occur outside of the project area, but that could potentially be directly or indirectly affected by activities in the project area. However, determining the likelihood and extent of effects a project may have on trust resources typically requires gathering additional site-specific (e.g., vegetation/species surveys) and project-specific (e.g., magnitude and timing of proposed activities) information.

The IPaC trust resources report lists critical habitats and species of concern known or suspected to be found in habitats within regional ecology. The IPaC trust resources report found that the following species may potentially be affected by activities in this location:

- **Mammals**:
  - Indiana Bat (*Myotis sodalist*) – Endangered
  - Northern Long-eared Bat (*Myotis septentrionalis*) – Endangered
  - Tricolored Bat (*Perimyotis subflavus*) – Proposed Endangered
- **Birds:**
  - Whooping Crane (*Grus americana*) – Experimental Population, Non-Essential
- **Clams:**
  - Salamander Mussel (*Simpsonaias ambigua)* – Proposed Endangered
- **Insects**:
  - Monarch Butterfly (*Danaus plexippus*) – Candidate
- **Critical Habitats**:
  - Indiana Bat (*Myotis sodalist*)

A project involving federal funding, a federal permit, or another federal action may require consultation with the U.S. Fish and Wildlife Service under Section 7 of the Endangered Species Act. Species status and consultation requirements should be refreshed when a specific project is proposed.

The IPaC report also identifies the Migratory Birds Resource List that identifies certain birds protected under the Migratory Bird Treaty Act of 1918 and the Bald and Golden Eagle Protection Act of 1940. Birds listed in the report are birds of particular concern either because they occur on the USFWS Birds of Conservation Concern (BCC) list or warrant special attention within the subject site location. The report does not include a list of every bird found within the site location, nor a guarantee that every bird on this list will be found within the site. The migratory bird list is derived from data provided by the Avian Knowledge Network (AKN). The AKN data is based on a growing collection of survey, banding, and citizen science datasets and is queried and altered to return a list of those birds reported as occurring in the 10km grid cell(s) that intersect the specified site study area location and have been identified as warranting special attention because they are a BCC species or an eagle (Eagle Protection Act requirements may apply) in that area.

The IPaC Migratory Birds Resource List (MBRL) provides a "Probability of Presence" summary indicating the best understanding of when birds of concern are most likely to be present in the site area. *While there is no immediate known impact to site development, the MBRL should be further reviewed within the context of environmental permitting requirements by a qualified environmental/ecological consultant, as temporal migratory bird presence may affect the timing of certain construction-related activities on the subject site*. The IPaC trust resources report is provided in **Appendix E**.

Legacy Environmental Concerns consist of historical activities and events both on the subject site and on nearby tracts where harmful contaminants were released into soil, surface water, and groundwater. If not properly remediated under state and federal regulatory requirements by qualified environmental consultants/contractors, historical contamination liabilities may be inherited through chain of title even if the contamination originated offsite, particularly with migration through groundwater transport. The historical environmental event implication for site development depends on many factors including the type, extent, concentration, complexity, physical setting and surface/subsurface conditions, and time since the event, which may or may not pose a risk to prospective investors on site development.

A cursory review of the subject site and surrounding properties was conducted to identify any potential legacy environmental concerns. Informational resources consulted for this review include:

- EDR Radius Report;
- Recent and historical aerial imagery review;
- US Environmental Protection Agency's (EPA) Enforcement and Compliance History Online (ECHO) database (EDR Radius Report limits ECHO database search to the target property); and
- Information provided through interviews with local political officials, economic development representatives, and landowners (where available)

The EDR Radius Report searches environmental databases for permitted facilities, events, and other potential concerns occurring on the subject site and within a search radius that varies by database. The maximum radius of 1.0 mile applies to the NPL, SHWS, and CORRACTS databases; a 0.5-mile radius applies to LUST, SWF/LF, RCRA-TSDF, and most other databases; a 0.25-mile radius applies to RCRA generator, FEMA UST, and 2020 COR ACTION records; and Recovered Government Archives records are searched at the target property only. EDR use statement: *"A search of available environmental records was conducted by Environmental Data Resources, Inc (EDR). The report was designed to assist parties seeking to meet the search requirements of EPA's Standards and Practices for All Appropriate Inquiries (40 CFR Part 312), the ASTM Standard Practice for Environmental Site Assessments (E1527-21), the ASTM Standard Practice for Environmental Site Assessments for Forestland or Rural Property (E2247-16), the ASTM Standard Practice for Limited Environmental Due Diligence: Transaction Screen Process (E1528-22) or custom requirements developed for the evaluation of environmental risk associated with a parcel of real estate".*

Based on the results of the EDR Radius Report and a cursory review of historical aerial imagery, five environmental legacy concerns were identified near the subject site. Map IDs below correspond to the EDR Radius Report overview map; note that EDR assigned two Map IDs (A2 and A3) to Leons Marathon because that facility appears as two separate database records.


- ***Continental Baking Company***
  - *Databases: UST FINDER*
  - *Distance: 85 feet (0.016 mile), west*
  - *Elevation: higher (823' MSL)*
  - *Map ID* 1

- ***Leons Marathon HLP INC DBA***
  - *Database: EDR Hist Auto (record A2); RCRA NonGen/NLR and MANIFEST (record A3)*
  - *Distance: 118 feet, north-northwest*
  - *Elevation: lower (754' MSL)*
  - *Map ID* A *(A2, A3)*

- ***Woolery Stone Quarry***
  - *Database: MINES MRDS*
  - *Distance: 824 feet, northeast*
  - *Elevation: lower (734' MSL)*
  - *Map ID* 4

- ***Indiana Quarries & Carvers LLC***
  - *Databases: US MINES*
  - *Distance: 1,078 feet, southeast*
  - *Elevation: lower (722' MSL)*
  - *Map ID* 5

- ***C & H Stone Co. Inc. / Maple Hill Quarries***
  - *Databases: US MINES, ABANDONED MINES*
  - *Distance: 1,259 feet*
  - *Elevation: lower (741' MSL)*
  - *Map ID* 6

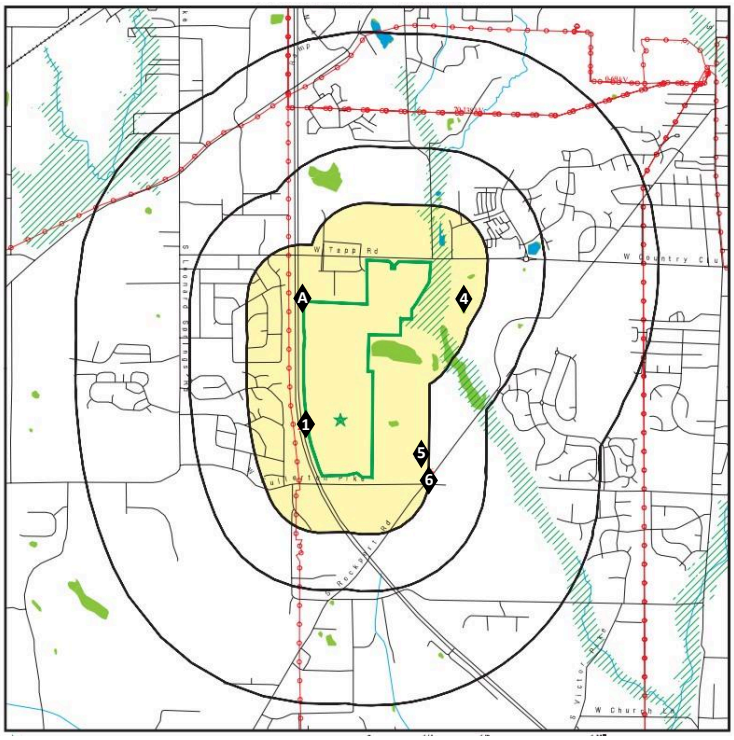

EDR Radius Report Mapped Sites Overview Map

The Continental Baking Company site (Map ID 1) is plotted 85 feet (0.016 mile) west of the subject site. The UST FINDER database has records of two closed underground storage tanks (USTs): Tank IN3253_1, installed in 1977 for diesel storage, and Tank IN3253_2, also installed in 1977 for used oil storage. The

removal dates were not reported for these tanks. The presence of historical USTs would ordinarily raise concerns about potential soil and groundwater contamination. However, the plotted location is not reliable. The UST FINDER record's own coordinates (latitude 39.37293151, longitude −86.47975765) place the facility approximately 17 miles north-northeast of the subject site, and the record identifies its coordinate source as "Geocode" rather than a surveyed position; the record's street address does not correspond to the plotted location adjacent to the site. Historical aerial imagery provides no indication of the facility being located on or near the site, and the facility is not identified in the Phase I Environmental Site Assessment dated August 10, 2022. On this basis the plotted point is regarded as a geocoding artifact and does not appear to be a concern for site development.

Leons Marathon (Map ID A — A2 and A3) is plotted 118 feet north-northwest of the subject site; EDR assigned two Map IDs because the facility appears as two separate database records (EDR Hist Auto, and RCRA NonGen/NLR with MANIFEST). Data from the RCRA NonGen/NLR and MANIFEST databases indicate the handling of benzene (waste code X001), a hazardous substance; the handler status is reported as "not a generator, verified." Although the facility is no longer a generator of hazardous waste, its past activities would ordinarily raise concerns about potential environmental impacts, and the facility's distance from the proposed buildable areas offers some buffer from direct impact. As with the Continental Baking record, historical aerial imagery provides no indication of the facility being located on or near the site, and the facility is not identified in the Phase I Environmental Site Assessment dated August 10, 2022, which indicates that the plotted point is a geocoding artifact rather than a surveyed location. On this basis it does not appear to be a concern for site development.

The Woolery Stone Quarry (Map ID 4), located 824 feet northeast of the subject site, is a former limestone quarry that reportedly ceased operations circa 1996 and was listed in the National Register of Historic Places in 2002. The "Producer" status in the MINES MRDS database is a historical mineral-inventory classification and should not be interpreted as evidence of current operation. Potential effects associated with former quarry properties, including groundwater conditions and surface-water runoff, should still be considered in site design. Because the subject site is served by municipal water and does not rely on groundwater for potable supply, quarry-related groundwater quality is not expected to affect the site's water service. The Phase II ESA and EDR GeoCheck materials identify other groundwater receptors in the vicinity; stormwater and spill-prevention design should account for those receptors.

Indiana Quarries & Carvers LLC (Map ID 5), classified as permanently abandoned, conducted historical mining operations southeast of the subject site. Although mining activities have ceased, abandoned mine sites may still pose risks such as groundwater contamination and land subsidence.

C & H Stone Co. Inc. / Maple Hill Quarries (Map ID 6), identified in the US MINES database, is located downgradient from the subject site and is not expected to have adverse environmental impacts on the site.

The EDR materials identify several distinct quarry and mine records east of the subject site. Woolery Stone Quarry is a former quarry that reportedly closed in the 1990s and is listed in the National Register of Historic Places; the "Producer" status in the MRDS mineral-resources database is historical and should not be interpreted as a current operating status. The quarry complex at 4000 Rockport Road has been associated with multiple operators and mine identification records over time. EDR records for Mine ID

1202280 include closed mine-safety citations under C&H Stone Co. and Indiana Quarries & Carvers LLC. Separate MSHA fatal-accident investigations at Maple Hill Quarry, Mine ID 12-01039, relate to operations by B.G. Hoadley Quarries on C&H-owned property. These occupational-safety records should not be interpreted collectively as environmental violations or attributed to a single operator. The current operating status of the 4000 Rockport Road complex was not independently verified.

Full facility information is provided in the EDR Radius Report and included **Appendix H**. The EDR package also includes a Certified Sanborn Map Report and an Aerial Photo Decade Package covering fifteen image years from 1939 through 2020. The Sanborn report identified no available fire-insurance-map coverage for the subject property. The absence of Sanborn coverage should not be interpreted as proof that no historical commercial or industrial activity occurred; it is reported only as the result of the map search. All three EDR products are provided in **Appendix H**.

Note: The EDR inquiries were submitted using the address label "300 N. State Road 37." The correct directional for the State Road 37 frontage is South. The EDR radius maps and historical aerial imagery depict the subject parcels, indicating that the database search was located by coordinates independently of the incorrect address label. The address printed in the EDR deliverables should therefore be treated as a labeling error rather than a change in the search area.

Because EDR search radii vary by database and do not exceed 1.0 mile, the U.S. Environmental Protection Agency Enforcement and Compliance History Online (ECHO) database was consulted separately for permitted facilities within 2.0 miles of the subject site. The ECHO search was generated March 27, 2024. ECHO Search results reported two nearby facilities. The first facility, Mill Creek PUD Phase 2 Section 1, holds a Non-Major NPDES Individual Permit for Construction Stormwater, with no reported violations. Similarly, the second facility, Fullerton Pike Phase 3, operates under a Non-Major General Permit for Construction Stormwater, also with no violations reported. *No facility identified in the available ECHO material is located on the subject site, and the available compliance information does not indicate a legacy environmental concern for the property.*

As with any desktop research exercise, actual potential environmental concerns may not be fully recognized or understood without conducting an on-site field investigation. The industry standard for real estate environmental review is the Phase I Environmental Site Assessment (ESA). Governed by the ASTM E1527: *Standard Practice for Environmental Site Assessments: Phase I Environmental Site Assessment Process.* The Phase I ESA is designed to investigate property prior to ownership transfer or improvements for use to identify and document any existing or potential contamination that must be addressed or give cause for liability. The Phase I ESA methodology includes more detailed research and review of environmental databases, historical aerial imagery, title research, and on-site field observations of the subject site and immediately surrounding properties.

VET Environmental Engineering, LLC (VET) performed a Phase I Environmental Site Assessment dated August 10, 2022 on Parcel 53-08-18-300-001.000-009, the Brown Trust parcel, comprising approximately 87 acres, or roughly 45 percent of the total site area. No Phase I ESA was provided for the Busted Block parcel comprising the northern portion of the site. VET observed evidence of grading and deposition of fill material on the Brown Trust parcel. The grading reportedly resulted from construction of a road foundation

around 2015, and topsoil was reportedly stripped and sold during the same period. Although the grading and filling may be attributable to the road-foundation work or topsoil excavation, the origin and contents of potential fill material along the northern boundary of the Brown Trust parcel were unknown and were therefore identified as a Recognized Environmental Condition. Relevant sections of the Phase I ESA are provided in **Appendix F**.

Following the Phase I ESA, VET conducted a Phase II Environmental Site Assessment (Phase II ESA), dated September 21, 2022, covering the same single parcel. The purpose of the Phase II ESA was to assess the presence or absence of on-site contamination associated with the REC identified in the Phase I ESA. Soil samples collected from the fill material suggested that the fill material likely originated off-site. Arsenic was the only analyte detected above the applicable IDEM Remediation Closure Guide screening levels. VET concluded that the detected arsenic concentrations were consistent with naturally occurring background concentrations for southern Indiana, with all samples below 15 mg/kg, and that further investigation or remedial measures for soil at the site are not warranted. It should be noted that VET's risk screening was performed against a residential exposure scenario, selected because the project premise at the time was a proposed municipal development associated with the Monroe County Justice Department with both commercial and residential land use components. That screening basis is more conservative than the industrial or commercial exposure scenario applicable to the R&D technology park and business park land uses contemplated in this report. Relevant sections of the Phase II ESA are provided in **Appendix F**.

Connection

Site connectivity includes access to key transportation assets and utility infrastructure sufficient for the use intensity of the subject site. Access to available workforce is also measured within the context of the intended economic development project use (e.g., heavy industrial, light industrial, commercial/freight logistics, etc.). *The Bloomington Tech Park is well connected to transportation and utility assets. In conjunction with strong community support, the site is well positioned for competitive response to R&D technology park and business park/medical project opportunities.*

Transportation Assets are in place to serve the logistical needs of commercial/industrial business operations in the area. *Substantial transportation connections to the site include interstate frontage and direct access.*

Access to the site is currently available via West Fullerton Pike, a two-lane access road adjacent to the site's southern boundary. The site can also be accessed via West Tapp Road at its northern boundary, however, this road overlaps with access routes for various local features, including churches, schools, a historic event venue, a country club, and residential neighborhoods. The site is bordered by Interstate 69 (I-69) to the west. From the site, truck traffic must travel approximately 1,200 feet on West Fullerton Pike to access I-69, Exit 115. The roadway leading to interstate access appears to be in good condition and suitable for truck traffic, and the distance

from the site to the interstate is considered an advantage for many industry types. A site access map is included in **Appendix A**.

Truck Routes accessible by the site include I-69 for north-south travel and Indiana State Road 46 (SR-46) for east-west travel. I-69 is located immediately west of the site with direct access available. I-69 can be taken north for approximately 53.2 miles to reach the heart of Indianapolis and multiple other truck routes including I-65, I-70, I-74, US-421, US-40, and US-31. I-69 can also be taken south toward Evansville and additional truck routes including I-64, I-169, I-24, US-60, US-41, and US-62. The site's proximity to several truck routes and direct interstate access are considered key strengths. A transportation vicinity map is provided in **Appendix A**.

Railroad lines do not currently extend to the subject site and are not required for the intended R&D technology park and business park/medical project uses of the site. The nearest railroad is an Indiana Railroad shortline approximately 2.4 miles in direct linear measure west of the site. It is not practically or economically feasible to construct a rail spur into the site. A transportation vicinity map is provided in **Appendix A**.

Airport access is beneficial for both corporate executives and other business-related representatives to travel to a facility during construction and when operational. Cargo airport access provides an opportunity for transportation of process input materials and product distribution.

The Monroe County Airport (KBMG) is the closest airport to the site and is located within approximately 4.4 miles (~8-minute drive). It is a county-owned public-use airport. Commercial service has been available at different points throughout the airport's history, but no scheduled service is available currently or for the future.

The Indianapolis International Airport (IND) is approximately 47.1 miles north of the subject site by driving distance (~50-minute drive), providing passenger service. IND is home to the second largest FedEx Express hub in the world and was ranked as the sixth busiest U.S. airport in terms of air cargo throughput in 2020.

The Eagle Creek Airpark (EYE) is a public use airport located approximately 57.3 miles north of the subject site (~1-hour drive). It is owned by the Indianapolis Airport Authority and serves as a reliever airport for Indianapolis International Airport. The airport covers 315 acres and has one runway measuring 4,205 feet in length.

Seaport access is not required for the intended R&D tech and business park/medical project uses of the site. However, the nearest seaport is Ports of Indiana–Jeffersonville, located approximately 91 miles (~1 hour and 50 minutes by drive) southwest of the site. Ports of Indiana-Jeffersonville is on the Ohio/Mississippi river system, just minutes from downtown Louisville, KY. Handling more than 2 million tons of cargo annually, the port is a center for the rapidly growing advanced manufacturing and logistics industries. Additionally, Mount Vernon is approximately 134 miles away (~2-hour drive) southwest of the site. Ports of Indiana-Mount Vernon handles more cargo

than any other port in the state. With close proximity to the confluence of the Ohio and Mississippi rivers, it serves as a major gateway for agricultural, energy, and manufacturing industries.

Utility Infrastructure is favorable for the subject site. City of Bloomington Utilities provides water, wastewater, and stormwater service; Duke Energy Indiana provides electric service; CenterPoint Energy Indiana North provides natural gas; and multiple telecommunications providers serve the Bloomington area. Utility information in this section is drawn from provider correspondence, county utility mapping, the SSI Phase II Questionnaire completed by landowner Warren Cutshall on February 21, 2024, the historical Duke Energy Site Readiness Program report dated September 18, 2014, and updated research completed in 2026. Because available capacity, connection route, cost, and schedule depend on a prospective user's demand and service requirements, the information below represents planning-level due diligence. **Appendix A** contains an energy infrastructure and utility access map, **Appendix J** contains the landowner questionnaire**, Appendix L** contains additional utility mapping, and **Appendix M** contains the historical Duke report.

Potable Water is provided by City of Bloomington Utilities, which draws from Lake Monroe. The Monroe Water Treatment Plant is rated at approximately 30 MGD and reportedly averages about 15 MGD, with seasonal peaks near 23 MGD, indicating system-level treatment headroom. Project materials identify a 16-inch main serving the southern site area, additional mains serving the northern area, and a 36-inch transmission main along the Fullerton Pike corridor. Because the source materials differ regarding the sizes and configuration of the northern-area mains, those details are treated as planning information rather than a utility commitment. Water-main relocations associated with the Fullerton Pike Phase III project are complete. Potable Water is graded favorably based on nearby infrastructure and source and treatment capacity, subject to project-specific engineering review.

Sewer/Wastewater service is provided by City of Bloomington Utilities. Project materials identify an 8-inch gravity sewer serving the southern Brown Trust parcel and a lift station with a reported capacity of approximately 0.97 MGD near the southern site boundary. The northern Busted Block parcel does not have direct sewer service; a 15-inch gravity main is reported nearby, and the landowner questionnaire states that tapping-fee waiver entitlements may apply. Wastewater is treated at the nearby Dillman Road facility, which is rated at approximately 15 MGD and has historically operated near its rated capacity. A funded modernization and expansion is intended to increase the plant rating to approximately 19 to 20 MGD. In summary, service is available to the southern area and an identified expansion addresses system constraints, while the northern parcel requires an extension and project-specific capacity review.

Stormwater service is administered by City of Bloomington Utilities. The site's karst setting, mapped sinkhole area, onsite streams, and field-delineated wetlands materially affect stormwater design and the selection of best-management practices. Land-disturbance and stormwater plans must comply with applicable City requirements and may require coordination with the Indiana Department of Environmental Management and the Indiana Department of

Natural Resources. Nonresidential stormwater charges and permit fees are time-sensitive and should be confirmed at the time of application.

Natural Gas service is provided in the area by CenterPoint Energy Indiana North. Provider correspondence identifies a 16-inch high-pressure line west of I-69, a 4-inch medium-pressure line along Tapp Road serving the northern site vicinity, and an 8-inch medium-pressure steel line near the southern Brown Trust parcel. Available capacity changes with system conditions and is evaluated for each project; no fixed site capacity should be assumed. A connection may require extension from the south and a bore beneath I-69. Historical information from approximately 2014-2015 indicated that permission had been obtained to bore beneath the former State Road 37 alignment and estimated a six-month service timeline, though those statements predate the I-69 conversion and are not current commitments. While substantial natural gas infrastructure is nearby, a project-specific extension is expected.

Electric power is provided by Duke Energy Indiana. Provider correspondence indicates that three-phase service is available on the southern side of the site and that a short extension would be required to reach the northern area. Planning information identifies approximately 8-10 MW of near-term distribution capacity from the Rockport Road and Rogers Street substations combined. Loads in the 10-20 MW range may require a second distribution bank at the Rockport Road substation, while larger loads may require upgrades to nearby 138-kV or 345-kV transmission facilities and potentially a dedicated substation. A 345-kV source project has been identified for the area with a planned 2030 completion. Duke's Bloomington Reliability Project has also improved transmission resiliency in the broader vicinity. These figures are planning-level information rather than a formal load-study commitment.

Duke Energy Indiana's Economic Development Rider, Standard Contract Rider No. 58, was verified in 2026 as providing a reduction of up to 30 percent on electric bills for up to five years for qualifying new or incremental load of at least 500 kW at a minimum 35 percent load factor, subject to applicable schedules and significant state or local economic-development incentives. A January 28, 2026 tariff filing permits a qualifying customer to request an extension of the reduction period from five to ten years at Duke Energy's discretion. Current eligibility and tariff terms should be confirmed when a project requests service. Electric utility is considered optimal because three-phase service and substantial distribution and transmission infrastructure are nearby, subject to project-specific engineering and schedule requirements.

Telco/Broadband infrastructure is available near the subject property, and multiple providers offer business or enterprise service in the Bloomington area. A Smithville Fiber Build Status Map captured in April 2024 shows fiber immediately south of the site across West Fullerton Pike. Smithville offers Enterprise Dedicated Internet Access up to 10 Gbps symmetrical and point-to-point or wide-area-network services up to 100 Gbps, generally subject to a custom extension to the parcel. A citywide fiber project formerly known as Hoosier Fiber Networks is now associated with mStreet Fiber and the GigabitNow retail brand. The network was reported as more than 50 percent complete in late 2025, but new right-of-way construction remained paused as of February

2026, and parcel-level service at the subject site has not been confirmed. AT&T Business and Comcast Business may provide additional or redundant options, subject to address-level availability. Strong enterprise options exist nearby for broadband/fiber, but a site-serving commitment is not documented.

Major Market Areas are accessible from the subject site through the regional interstate network. By road, downtown Indianapolis is approximately 53.2 miles northeast of the site and Chicago is approximately 234 miles northwest. These travel distances provide access to major regional labor, supplier, customer, air-cargo, and professional-service markets. A major market vicinity map is provided as **Appendix A.**

Time and Distance to Ports


Ports of Indiana	Travel Time	Miles
Jeffersonville	1:50	91.4
Mount Vernon	2:05	134
Burns Harbor	3:17	213

Time and Distance to Major Markets

Major Markets	Travel Time	Miles
Indianapolis, IN	0:55	53.2
Louisville, KY	1:48	90.6
Cincinnati, OH	2:26	157
Fort Wayne, IN	2:46	177
Lexington, KY	3:03	168
Columbus, OH	3:24	227
St. Louis, MO	3:42	229
Chicago, IL	3:53	234
Toledo, OH	4:06	278
Nashville	4:09	266
Detroit, MI	5:04	339
Milwaukee, WI	5:22	331
Cleveland, OH	5:27	369

Community

Community aspects conducive to site competitiveness include both measurable and intangible factors that can either strengthen or undermine a site's inherent competitive advantages. While workforce availability and cultural features are commonly accounted for, business and political climate are often neglected, yet serve as an important indicator for both community and governmental desire to welcome new business investment. The Monroe County community and political leadership are strong proponents of business growth and new job creation, creating a business climate highly conducive to project investment support through efficient permitting, workforce training, and competitive tax structures. Monroe County is committed to supporting long-term industrial and commercial business operations in its communities.

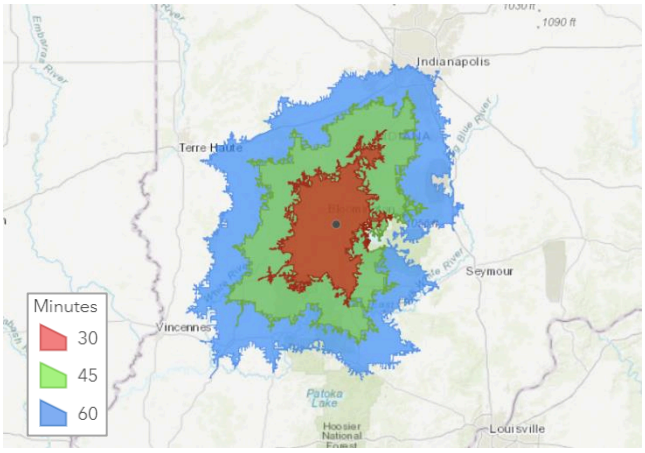

30, 45, 60-minute Drive-time Employment Query

Description of the Economy

Monroe County is located in Indiana, a state that boasts a business-friendly environment, solid infrastructure, and substantial creation of manufacturing jobs. The county is located in south-central Indiana, with Bloomington serving as the county seat and principal population and employment center. According to the Purdue Rural Indiana Classification System (2013), Monroe County is classified as an urban county. Monroe County is part of the Bloomington, Indiana Metropolitan Statistical Area, which consists of Monroe and Owen Counties under the current delineation. U.S. Census Bureau Vintage 2024 estimates place the two-county MSA population at approximately 162,553. Recent estimates indicate a relatively stable metropolitan population. The county economy is supported by Indiana University, health care and life sciences, advanced manufacturing, technology, government, and access to the broader Indianapolis and south-central Indiana markets. Additional local planning context is provided in the City of Bloomington and Monroe County comprehensive plans in **Appendix D**.

Demographics

Monroe County's demographic profile is strongly influenced by Bloomington and Indiana University, resulting in a comparatively young population and a substantial concentration of students, educators, health-care workers, and professional employees. Monroe County has a 2025 total population estimate of 143,345 according to the U.S. Census Bureau QuickFacts data access tool. Between April 2020 and July 2025, the county saw a population growth rate of 1.8%. The population is approximately 83.6% White, 7.0% Asian, 4.1% Black or African American, 0.4% Native American, 0.1% Pacific Islander, and 4.7% two or more races. Approximately 5.4% of the population are Hispanic or Latino. The county's median age is 31.2.

Employment, the Economy, and Income

The U.S. Census Bureau American Community Survey 2020-2024 five-year estimates report a civilian labor-force participation rate of 62.1 percent among Monroe County residents age 16 and older and approximately 71,252 employed residents. Educational services, health care and social assistance; arts, entertainment, recreation and accommodation and food services; and manufacturing are the county's top three employment industry sectors. Median household income for Monroe County is $65,868 in 2024 inflation-adjusted dollars, compared to the median annual household income of $71,957 across the State of Indiana.

Population and Workforce *within a 60-minute drive time from the site include a total resident population of more than 904,910, a civilian labor force of 468,910, and an employed labor force of 454,205, across 28,146-plus businesses, according to Esri 2023 demographic data. Construction, manufacturing, and professional, scientific, and technical services account for 18.9 percent of businesses within the 60-minute drive radius and employ 128,681 people, or 28.3 percent of the employed labor force.* A 30, 45, and 60-minute drive-time query of employment numbers for construction and manufacturing jobs (by NAICS Code) was performed for the subject site. The following employment numbers were reported:

30, 45, 60-minute Drive-time Employment Count*

Business Type by NAICS Codes	Employees		
	30-min	45-min	60-min
Construction	5,505	12,727	35,921
Manufacturing	12,356	23,735	64,915
Professional, Scientific & Tech Services	5,316	10,800	27,845
Totals	**23,177**	**47,262**	**128,681**

**Source: Copyright 2023 Infogroup, Inc. All rights reserved. Esri Total Residential Population forecasts for 2023.*

Monroe County target industries include Advanced Manufacturing, Artificial Intelligence, Machine Learning & Big Data, Biotechnology, Cyber Security, Creative Arts, Defense Technology, Energy, Food, Life Sciences, and Technology. With access to a total workforce of over 468,910, which includes 123,681 employed in the construction, manufacturing, and professional, scientific, and technical services sectors, adequate workforce availability should sufficiently meet medium to large-scale project labor demands of county industry targets. Access to a skilled workforce is considered a strength for the Bloomington Tech Park. Esri 2023 population and business summary reports are provided in **Appendix I**.

Cultural Features within three miles of the subject site that may pose community risk or public opposition to industrial development are limited and generally do not affect site permitting, construction, or facility operation. Fire and police protection and emergency medical services are within relatively close distance to the subject site, but not close enough to pose cross-transportation risks for site construction or facility operation. A cultural features map is provided in **Appendix A**.

Schools are not located within a 1-mile radius of the subject site boundary, although a school lies northeast of the site beyond that radius, as noted in the Zoning and Land Use discussion. There are several schools located within a 3-mile radius of the site, including two nurseries, five elementary schools, one middle school, three high schools, and two religious schools. Most of the schools are located to the east in the City of Bloomington, while a few are located northeast of the site across I-69. Schools located across I-69 should not significantly overlap with site buildable area and site ingress/egress road. However, W Tapp Rd overlaps with local access routes for various schools that are located to the east. As site ingress/egress may come from the site's southern boundary at W Fullerton Pike Road, the site should not interfere with primary transportation for the schools.

Churches within a 3-mile radius of the site are primarily located to the north and east in the City of Bloomington. There are forty-one total churches within three miles of the subject site. Six of the churches are less than one mile from the site boundary. Two of these, Woodhaven Christian Church and Friendship Church, are located across I-69 and are sufficiently removed from the site ingress/egress road and operational footprint of the site (e.g., buildable area). As such, the site poses no significant operational proximity or transportation risks. There are four places of worship

within 1.0 mile of the site that use W Tapp Rd as primary transportation for church facility access. These are Embassy Church, Cornerstone Christian Fellowship, Kingdom Hall of Jehovah's Witnesses, and Southern Hills Church of Christ. As site ingress/egress may come from the site's southern boundary at W Fullerton Pike Road, the site should not interfere with primary transportation for the churches. Buffer currently exists between the site and the churches, and if additional buffering is required, LL+D recommends that newly planted evergreen and deciduous trees and shrubs native to the region be planted along the site buildable area's north/northeastern boundary.

Cemeteries do not exist immediately proximate to the site or along principal site access routes. According to the Indiana SHAARD (State Historic Architectural and Archaeological Research Database), detailed below in the Historical Preservation section of this report, two cemeteries were indicated within a one-mile buffer of the subject site, but neither could be confirmed based on recent aerial imagery. Additional cemeteries are mapped within the 3-mile buffer; none pose a risk to site permitting or operation.

Group Care Centers including nursing homes, assisted living centers, special education schools, crisis units, and hospice facilities within one mile of the subject site include a senior living community, Cedar Creek of Bloomington, and a hospice facility, IU Health Bloomington Hospice House. Cedar Creek is located to the northeast across W Tapp Rd, and IU Health is located within a small medical park adjacent to the site's boundary at the northwest corner. As site ingress/egress can come from the south at W Fullerton Pike Road, the site should not interfere with either facility's primary transportation. There is likely adequate buffer to the site relative to Cedar Creek of Bloomington across W Tapp Rd. As IU Health Bloomington Hospice is located adjacent to the site's northwestern corner, LL+D recommends that a strip of the existing forested areas be left for additional vegetative buffer to the medical park. There are four additional assisted living facilities and three hospice facilities located within 3 miles of the subject site, none of which interfere with site permitting or operation.

Other Cultural Centers including libraries, museums and art galleries, movie theaters and performing arts centers, zoos and aquariums, arboreta and botanical gardens, and planetariums immediately proximate to the site include the One World at Woolery Mill historic event venue. The venue is located northeast of the site across W Tapp Rd. There is likely adequate buffer to the site, but if for any reason additional buffering is required, LL+D recommends that a buffer consisting of newly planted evergreen and deciduous trees and shrubs native to the region be planted along the site buildable area's north/northeastern boundary. Bloomington Country Club is also located east of the site and is sufficiently removed from the site's buildable area. The Monroe County Public Library – Southwest Branch is east of the site's southern portion and should pose no threat to development or issues with site ingress/egress.

Parks and Protected Lands existing within proximity of the site is limited to the Wapehani Mountain Bike Park located north of the site across W Tapp Rd. This area is sufficiently removed from the operational footprint of the site (e.g., buildable area). Other parks and nature preserves

located within a 3.0-mile buffer of the site include Leonard Springs Nature Park, RCA Community Park Playground, Switchyard Park, Twin Lakes Sports Park, Karst Farm Park, and Wayne Woods. All of these are removed enough from the site so as not to pose any threat to site development. A protected lands map is provided in **Appendix A**.

Correctional Facilities including federal, state, and local prisons and detention centers do not exist immediately proximate to the site or along principal site access routes. The Monroe County Jail and Correctional Center is located approximately 2.8 miles northeast of the site.

Fire Protection/EMS service in the site vicinity is provided through the Monroe Fire Protection District and other mutual-aid agencies serving the Bloomington area. Nearby district facilities include Station 29 at 2130 South Kirby Road, district headquarters at 285 East Rhorer Road, and Station 39 at 9019 Hinds Road. First-due jurisdiction, fire-flow requirements, and project-specific emergency-service coordination will be addressed through the applicable review and permitting processes.

Law Enforcement service is available from the Bloomington Police Department, Monroe County Sheriff's Office, and Indiana State Police agencies serving the Bloomington and Monroe County area. Agency jurisdiction and project-specific security coordination will be addressed with the applicable local and state agencies as development advances.

Hospital/Emergency Care is provided by Monroe Hospital, which is located along W Fullerton Pike within 0.4 miles and a 2-minute drive of the site access point. Multiple services are available including 24/7 emergency room, diagnostic imaging, wound care, medical-surgical nursing/ICU, and 32 private staffed rooms. Indiana University Health Bloomington Hospital is located approximately 8.6 miles and 13 minutes from the subject site and provides emergency, intensive-care, surgical, wound-care, and rehabilitation services. The facility offers a broad range of regional acute-care and specialty services.

Historical Preservation records include locations of cultural or archaeological significance, some of which are formally designated as state and/or federally protected historical resources under State Historic Preservation Offices (SHPO) and/or National Register of Historic Places registrations. Historical resources, if located on the subject site, may alter, impede, or preclude development if potential for disturbance or encroachment exists. Historical resources located near the subject site may warrant mitigating site planning and design elements such as line-of-site buffering between facilities and a historically significant structure. The Indiana Department of Natural Resources (IDNR) houses the Division of Historic Preservation and Archaeology (DHPA), which promotes the conservation of Indiana's cultural resources. The DHPA facilitates state and federal preservation programs and is the staff of the State Historic Preservation Office. The DHPA's Archaeology Team administers programs for protecting and preserving Indiana's prehistoric and historic archaeological sites, is the central repository of archaeological records and reports, and houses the state's official computerized database of archaeological site information.

Several cultural resource GIS datasets from the IDNR were consulted for potential location of culturally or historically significant resources on or near the subject site. These datasets are collected and contained


within the State Historic Architectural and Archaeological Research Database (SHAARD), which allows users to search cultural resource information on known historic and archaeological resources throughout the State of Indiana. SHAARD includes data from the Indiana Historic Sites and Structures Inventory county survey (IHSSI), the Indiana Cemetery and Burial Ground Registry, historic bridges and canals, historic theaters, and properties listed in the National Register of Historic Places and the Indiana Register of Historic Sites and Structures. The data contained in SHAARD was collected from previously conducted cultural resource inventories, National Register nominations, and cultural resource management projects. SHAARD and associated resource maps are ongoing initiatives and are updated on a continuing basis, so the absence of data does not necessarily indicate the absence of resources. A more formal archaeological survey may be necessary prior to site development.

A desktop data review was conducted regarding available records for potential cultural resources present on the subject property. *The SHAARD database identified no archaeological sites and no historic structures on the subject site. Cultural resources were identified within a 1-mile radius of the subject site's centroid. Identified cultural resources include two "Outstanding" archaeological sites, two cemeteries, multiple "Contributing" houses, and one "Demolished" house. The reported cultural resources are shown on the corresponding SHAARD web application map.*



SHAARD Map Search

Of the IHSSI resources shown, two have a rating of "Outstanding," meaning that the property has enough historic or architectural significance that it is either already listed in, or may be eligible for listing in, the National Register of Historic Places. The two resources differ in status. The Woolery Stone Company, at 2295 West Tapp Road, is listed in the National Register of Historic Places under file number NR-1663 and encompasses approximately 28 acres. The Borland House and Furst Quarry, at 2300 West Tapp Road (Survey No. 105-055-56001), carries an Outstanding rating and lies within the North Clear Creek Historic Landscape District. Both properties are located to the north and northeast of the site along West Tapp Road. *Both "Outstanding" resources are likely removed enough from the site buildable area that they should not be affected by onsite construction or present significant impediments to development; however, the presence of a listed National Register property and a named historic district immediately north of the site should be accounted for in any project requiring federal permitting or funding, which may trigger review under Section 106 of the National Historic Preservation Act.*

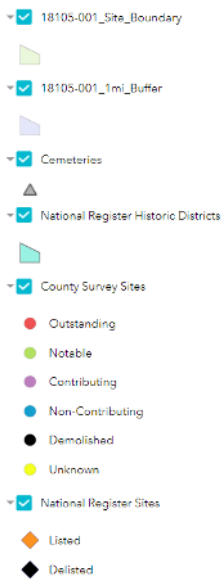

Two cemetery records were identified in the SHAARD review within a one-mile buffer of the subject site. *Neither cemetery location could be readily confirmed from recent aerial imagery. One mapped location lies west of the site across I-69 and the other lies northeast across West Tapp Road, providing separation from the defined buildable area. Because cemetery-map locations may be approximate and burial sites are legally protected, the applicable SHAARD records in Appendix K and current agency guidance should be reviewed before any ground disturbance is proposed near either mapped location.*

Several contributing houses are also located within the site's 1-mile buffer. They are primarily located west of the site across the interstate, with some also occurring south of the site and one occurring to the northeast near the Woolery Stone Company Historic District. *Properties with a Contributing rating hold less historic significance; therefore, these features are not likely to impact development.*

All other historically significant resources are located outside the 1-mile buffer surrounding the subject site centroid and are not likely to impact site development potential. The SHAARD/IHSSI Reports for cemeteries and cultural resources with an Outstanding rating within 1 mile of the subject site's centroid are provided as **Appendix K**, and the Historic Resource search map is provided as **Appendix A**.

As with any desktop research exercise, actual potential historic preservation concerns may not be fully recognized or understood without conducting an on-site field investigation. The industry standard for real estate environmental review is the Phase I Cultural Resources Survey. The primary objective of a Phase I archaeological survey is to identify and record all cultural resources within a project area. Cultural resources can include prehistoric Native American habitation sites, historic farmstead sites, standing structures, or other man-made features such as earthworks, old roadbeds, or cemeteries. The Phase I survey process typically begins with Phase IA Archaeological Reconnaissance to conduct historical research, environmental context review, and field inspection. When an archaeological site is encountered, a full written report must be submitted following guidance provided in the Current Guidebook for Indiana Historic Sites and Structures Inventory—Archaeological Sites and the Indiana Cultural Resources Manual.

Indiana law protects qualifying archaeological sites, historic properties, cemeteries, and burial grounds and establishes review and permitting requirements for certain ground-disturbing activities. Applicable provisions include IC 14-21-1-14, IC 14-21-1-16, IC 14-21-1-18, IC 14-21-1-26, and IC 14-21-1-26.5, together with other provisions governing cemeteries and human remains. Before development, a qualified cultural-resources professional should determine whether a Phase I archaeological survey is warranted and should review the current statutory requirements applicable to the proposed project. Relevant Indiana archaeology-law materials are provided in **Appendix K**.

Education and Technical Training Assets are well positioned to serve professional and technical workforce needs of Monroe County target industries, while colleges and universities provide valuable recruiting opportunities to local businesses.

The Indiana Department of Workforce Development (DWD) offers a variety of services to statewide job seekers looking to enter the workforce, return to the workforce, or locate education and training opportunities. These include Hoosier Talent Network, INDemand Jobs, Indiana Career Explorer, Indiana Career Connect, Cyberseek Indiana, and Indiana Career Ready. The DWD offers several services including job search help, hiring events, training grants, specialized training and more: https://www.in.gov/dwd/.

Indiana's WorkOne Career Centers are the heart of the workforce development system, providing assistance in understanding jobs in demand today, helping workers determine their interests and abilities, offering access to training opportunities, and providing information needed to succeed in today's economy. WorkOne's Job Opportunities and Business Services (JOBS) Program assists employers in locating and developing a skilled team by determining eligibility, recruiting employees, formulating WorkKeys job profiles, and providing skills assessments to identify gaps and training needs. WorkOne's WIN Career Readiness is a fundamental workplace skills training system available to Indiana residents, employers, and training providers. Both the DWD's Work Opportunity Tax Credit (WOTC) and Federal Bonding Program benefits employers by offering incentives for hiring jobseekers who may traditionally have difficulty finding employment.

Next Level Jobs provides free training for Indiana workers and reimbursements for Indiana employers for training employees in high-demand fields. Next Level Jobs assists job seekers by providing Indiana residents with free training in high-growth job fields and the opportunity for them to earn a high-value certificate in one of Indiana's in-demand job fields, tuition free. Next Level Jobs assists employers with reimbursements for training their employees through the Employer Training Grant, which will reimburse an employer for up to $5,000 per trained employee who is trained, hired, and retained for six months, granting up to $50,000 per employer.

Skillful Indiana works with employers to expand their pool of qualified candidates, helps institutions of higher education advance their skills-based credential and data platforms, invests in career coaches so they are better equipped to connect Hoosiers to effective training opportunities and quality jobs, and applies data-driven insights and technology tools to help employers adapt to the tech economy.

Regional Opportunity Initiatives (ROI) sponsors a variety of education and workforce initiatives to Monroe County and other counties in the Indiana Uplands to build a workforce that is prepared to meet employer demands. Initiatives include the Ready Schools Initiative, STEM Fellows, Out-of-School STEM Learning Grants, Career Pathways, Graduation and Career Coaches, Educator Boot Camp, and more.

Hoosier Hills Career Center is part of the Monroe County Community School Corporation and provides employability skills curriculum to high school students through various career pathways that reflect employment needs in the surrounding area.

Indiana University Bloomington is a public research university located within the City of Bloomington and is the flagship and largest campus of Indiana University. The campus enrolled more than 38,000 undergraduate students in fall 2025. Indiana University has committed at least $111 million to microelectronics and nanotechnology initiatives, including faculty positions, degree programs, and the Center for Reliable and Trusted Electronics, in partnership with Naval Surface Warfare Center Crane

Division. These assets are directly relevant to the site's technology, defense, and advanced-manufacturing target sectors.

Ivy Tech Community College is a two-year vocational/technical college with a campus in Bloomington that is an 8-minute drive from the subject site. Other locations surrounding the site within an hour and 30-minute drive include Indianapolis, Columbus, Franklin, Terre Haute, Scottsburg, and North Vernon campuses. Ivy Tech specializes in developing programs geared towards specific skills needed for existing manufacturers and other industries.

The Indianapolis area is within approximately one hour of the site and provides access to Indiana University Indianapolis, Purdue University in Indianapolis, Butler University, the University of Indianapolis, Martin University, Marian University, and other institutions. Additional institutions within the broader region include Indiana State University, DePauw University, Indiana University Columbus, Franklin College, Vincennes University, and Vincennes University Jasper.

Business Climate is highly favorable for bringing in quality job-creating businesses to the area. Indiana is considered one of the best states in the nation for long-term fiscal stability and low corporate income tax rates, creating a business-forward environment throughout the state. The State of Indiana's target Industries according to the IEDC include advanced manufacturing, aerospace and aviation, ag-bioscience, defense, life sciences, logistics and transportation, and technology. These industries can take advantage of existing transportation assets throughout the state and county to serve an array of unique business logistical needs. Monroe County's target industries, listed in the Population and Workforce discussion above, align with the state's target sectors and with the site's identified highest and best uses.

Monroe County offers a substantial labor pool supported by Indiana University, regional employers, and the broader 60-minute drive-time labor market described in the Population and Workforce section above. The American Community Survey 2020-2024 five-year estimates report an unemployment rate of 5.5 percent, a civilian labor-force participation rate of 62.1 percent among county residents age 16 and older, and approximately 71,252 employed residents.

Business development and assistance is provided locally by the Monroe County Economic Development Commission and the Bloomington Economic Development Corporation (BEDC). Local incentives may include real- or personal-property tax abatement, which can phase in property-tax liability over a period of up to ten years under Indiana law, subject to approval by the applicable designating body and the terms of the project agreement. To substantially reduce the cost of new investments, companies may pay no taxes on the abated investment in year one of the tax abatement, and benefits gradually decrease over the period of the abatement.


Tax Increment Financing (TIF) is another potential local incentive, a method of facilitating development or redevelopment by using future tax revenues to fund necessary improvements. The site lies within the vicinity of the Fullerton Pike interchange TIF district (Monroe County, State TIF District 030, established 2007), which encompasses approximately 80 acres (roughly 63 developable) and which was established for interchange infrastructure purposes. Whether TIF capacity is available to support utility extensions or oversizing for a project on this site has not been established and should be discussed with the Monroe

County Redevelopment Commission and the Bloomington Economic Development Corporation. Coordination between the City and County is required for bond issuance in annexed county TIF areas under IC 36-7-14-3.5.

In addition, the IEDC provides a variety of programs and initiatives offering business support and expertise to companies that are investing and creating jobs in Indiana. These include the Indiana Regional Cities Initiative, Certified Technology Park program, Broadband Ready Communities program, and Next Level Roads program.

The State of Indiana offers a variety of incentives for all types of businesses, including targeted industries, workforce training, infrastructure, and special opportunity incentives. Indiana's corporate adjusted gross income tax rate is 4.9 percent. Current statewide economic-development incentives include the Economic Development for a Growing Economy Payroll Tax Credit, the Community Revitalization Enhancement District Tax Credit, the Hoosier Business Investment Tax Credit, the Redevelopment Tax Credit, and the Data Center Sales Tax Exemption. Eligibility and award levels are determined by the Indiana Economic Development Corporation based on a project's proposed investment, employment, wage, and location commitments.

Political Climate is strong according to interviews with local officials, and the community is largely in favor of commercial/industrial business development to bring long-term positive economic growth to the area.

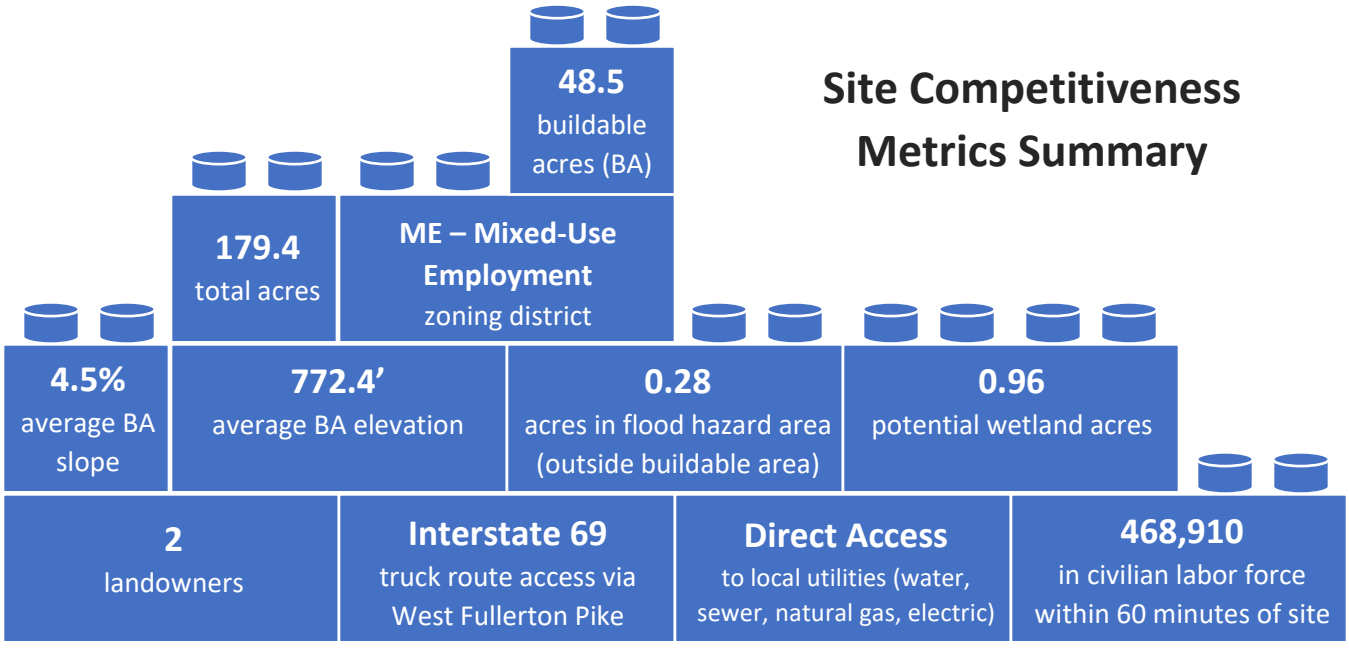

Site Competitiveness Report Card

The Site Competitiveness Report Card is an indicator of favorable development conditions across customary competitiveness factors. A relative score for each factor is given as a letter grade, akin to a 4.0 education grade point average (GPA). The GPA is calculated for each competitiveness area: Condition, Connection, and Community with an overall site GPA derived as a relative indicator of site competitiveness for an economic development land use.

Site GPA



Competitiveness Driver		
Condition	Comments	3.2
Engineering		
Elevation/Slope		C
Flood Risk		A
Buildable Configuration		C
Land Cover		B
Environmental/Cultural Resource		
Potential Wetlands		A
Legacy Environmental Liabilities		B
Potential T&E Risk		B
Connectivity		3.4
Transportation		
Interstate		A
Multi-lane Truck Route		B
Class I Rail		N/A
Airport (passenger)		B
Airport (cargo)		B
Seaport/Inland Port		N/A
Utilities		
Potable Water		A
Sewer/Wastewater Treatment		B
Natural Gas		B
Electric		A
Broadband/Fiber		A
Community		3.9
Cultural		
Compatibility with Surrounding Land Use		B
Community Acceptance		A
Economic		
Market Vitality		A
Tax Incentives		A
Labor		
Workforce		A
Wage Competitiveness		A
Political		
Permitting Expediency		A
Business Climate		A

Subject Site Key Facts

Advantages	Disadvantages
The site is well connected to all utility infrastructure assets (electric, natural gas, wastewater, potable water, and telecom)	The site's buildable area is broken up into ten small PADs by conservancy and karst easements, high slope percentage, and a proposed connector road that goes through the center of the site. The largest PAD available is approximately 16.2 acres. Targeting industries that don't require a large contiguous footprint should be a focus.
The current zoning of site and surrounding land use is ideal to support the development of R&D Technology Park and Business Park/Medical project land uses.	
The site's proximity to several truck routes and direct interstate access are considered key strengths.	The western portion of the subject site falls within a mapped sinkhole area (SHA). A Karst Survey performed on the Brown Trust parcel identified nineteen sinkholes and the associated Karst Conservancy Easements. No karst survey has been performed on the northern (Busted Block) parcel. LL+D recommends that a Karst Survey be performed on the northern parcel to eliminate uncertainty surrounding potential sinkholes.
Monroe County community and political leadership are strong proponents of business growth and new job creation, creating a business climate highly conductive to project investment.	
The Brown Trust parcel is currently listed for sale. Monroe County economic development officials report that the Busted Block landowner is not currently marketing the property but would consider selling given the right price and opportunity.	As of the date of this report, no known real estate purchase option agreement is held with any person or organization with the landowners for any portion of the site. LL+D strongly recommends that Monroe County pursue and secure a real estate purchase option agreement with the landowners. This is critically important to reduce uncertainty regarding property availability and price.
The site has low flood risk and minimal wetlands across the entirety of the site.	
Access to surrounding labor markets at competitive wage rates is well within reach of the subject site.	Soil suitability properties for small commercial building construction across 75.5% (135.5 acres) of the subject site are indicated as "Very limited" for shallow (2-feet deep) reinforced concrete spread footings. Substantial foundation requirements may not be supported by site soil conditions and must be determined through on-site geotechnical engineering investigation. The limitations can be overcome or minimized by special planning, design, or installation.
There is a total population of more than 904,910 within a 60-minute drive time of the site and a civilian labor force of 468,910.	
An engineering group performed both Phase I and Phase II ESAs in 2022 on the Brown Trust parcel, approximately 45 percent of the site. No notable signs of contamination were observed during the investigation; it was concluded that no further investigation or remediation is warranted. The EDR Radius Report returned no listings for the target property.	Site development in this karst setting should anticipate shallow bedrock in some areas; depth to bedrock varies across the site and must be established through on-site geotechnical investigation.

Site Competitiveness Opinion

Overall, the Bloomington Tech Park in Monroe County is a competitive greenfield site that is an excellent prospect for R&D Tech, and business park/medical project opportunities.

The site has several competitive features that position it as a strategic real estate asset to support economic development. Zoning is Mixed-Use Employment, while current and future land use designation of the site and surrounding tracts are generally compatible with the intended site use. The site is well-connected to transportation infrastructure with its proximity to I-69, and access to workforce and training opportunities are favorable to support the intended project intensity.

Major utility infrastructure is located at or near the property, although several services require extension or project-specific upgrades. The northern parcel does not have direct sewer service; a nearby 15-inch main is reported, and the landowner questionnaire states that tapping-fee waiver entitlements may apply. The Dillman Road treatment facility has a funded expansion from approximately 15 MGD to 19 to 20 MGD. Natural gas service requires a line extension and may require a crossing beneath I-69. Smithville fiber is mapped immediately south of West Fullerton Pike and offers enterprise-grade service, but extension to the site would require a custom build. The citywide mStreet Fiber/GigabitNow network has not been confirmed as serving the property.

Another strength of the site is that it has low flood risk and minimal wetlands across the entirety of the buildable area. The primary access roads, W Tapp Rd and W Fullerton Pike, are adequate transportation routes that connect the site to Interstate 69 (I-69). From there truck traffic can quickly reach Indianapolis and multiple different interstates and truck routes. With interstate access and the nearby metropolitan city of Indianapolis, a civilian labor force of more than 468,910 is available within a 60-minute drive time, drawn from a total population of more than 904,910.

VET Environmental Engineering performed a Phase I ESA dated August 10, 2022 and a Phase II ESA dated September 21, 2022 on the Brown Trust parcel, which represents approximately 45 percent of the site. The Phase II investigation found arsenic as the only analyte exceeding IDEM screening levels and attributed it to naturally occurring regional background, concluding that no further investigation or remediation is warranted. The EDR Radius Report returned no listings for the target property. No Phase I ESA has been performed on the northern parcel, and legacy environmental conditions there remain undetermined.

Finally, Monroe County community and political leadership are strong proponents of business growth and new job creation creating a business climate highly conductive to project investment.

Challenges for the site include lack of a known real estate purchase option, on-site soil conditions, non-contiguous buildable acreage, onsite sinkhole areas, the site's overlap with designated critical habitat for the Indiana Bat, and the absence of environmental assessment on the northern parcel.

As of the date of this report, no known real estate purchase option agreement is held with any person or organization with the landowners for any portion of the site. LL+D strongly recommends that Monroe

County pursue and secure a real estate purchase option agreement with the landowners. This is critically important to reduce uncertainty regarding property availability and price.

Another potential challenge is soil suitability for foundations: 75.5 percent of the property is rated "Very limited" for shallow reinforced concrete spread footings under SSURGO. This is a foundation-support limitation rather than a drainage limitation; site soils are predominantly well drained, with 19 percent moderately well drained and 3.8 percent somewhat poorly drained. Substantial foundation requirements may not be supported by site soil conditions and must be determined through on-site geotechnical engineering investigation. The limitations can be overcome or minimized by special planning, design, or installation.

There is potential for onsite sinkhole and conservation easements. The western portion of the subject site falls within a sinkhole area (SHA). A Karst Survey performed on the southern half of the site details specific locations of onsite sinkholes and the associated sinkhole easements. LL+D recommends that a Karst Survey be performed on the northern half of the site to eliminate uncertainty surrounding potential sinkholes.

Finally, the site's buildable area is broken up into ten small PADs by conservation/sinkhole easements, high slope percentage, and a proposed connector road that bisects the property. As a result, the largest PAD available is approximately 16.2 acres. Targeting industries that don't require a large contiguous footprint should be the focus.

Upon considering the factors presented throughout this SSI Phase II Report, it is the opinion of LL+D that the Bloomington Tech Park is a competitive site for attracting quality job-producing research, medical, technology, and other business projects to Monroe County, particularly for users whose requirements can be accommodated within a footprint of approximately 16 acres or less. The site benefits from Mixed-Use Employment zoning, Interstate 69 frontage, improved Fullerton Pike access, nearby utility infrastructure, a substantial regional labor force, and community support. Realizing the site's potential will require project-specific resolution of foundation, karst, stormwater, utility-extension, endangered-species, property-control, and northern-parcel due-diligence issues identified in this report

Purpose and Use of Study

Sites originating from Phase I have demonstrated qualitative compliance with engineering, environmental, infrastructure, and cultural location criteria. That said, in order to develop an actionable understanding of true site competitiveness, a more detailed study of the subject site is required. SSI Phase II: Preliminary Due Diligence is designed for this purpose.

Purpose

The purpose of the SSI Phase II study is to provide a quantitative understanding of the subject site's advantages and challenges, and to identify the measures needed to improve site functional use and mitigate development challenges. The SSI Phase II study is a desktop-based preliminary due diligence exercise performed by discipline-specific experts with experience in industrial and commercial property

development. Study of the subject site's physical and surrounding characteristics, assets, and impediments for development are reviewed in sufficient detail to formulate a defendable opinion on the competitive strength of the property for economic development.

Use

There are three primary intended uses of an SSI Phase II report: (1) site advancement decision support; (2) consideration for investment in site improvements; and (3) site marketing. Each intended use is discussed below.

Site Advancement Decision

The SSI Phase II study is designed to provide decision support for the advancement of sites to market though the landowner engagement process. SSI Phase II findings serve as an indicator for the likelihood the subject site will survive the intensive scrutiny of formal, field-based engineering and environmental due diligence. Detection of severe site deficiencies or encumbrances, often referred to as fatal flaws, during desktop preliminary due diligence can avoid expenditure of significant resources in subjecting sites with little chance of survival to formal due diligence. Short of fatal flaws, SSI Phase II may reveal less than ideal conditions or less severe yet concerning challenges that can marginalize site competitiveness or be detrimental to business attraction, respectively. The most important use of the SSI Phase II study is to ensure confidence in the decision to advance sites to market graduation through subsequent phases for landowner engagement and formal due diligence. *Ultimately, site advancement decisions should be tempered by local industry targets and the host community's real estate needs to support those targets.*

Site Improvement Investment Considerations

The findings of the Phase II study provide concrete data for Economic Development Offices (EDOs) to consider while making investment decisions to improve site marketability. There may be strong business cases for increasing site competitiveness by making incremental investment in infrastructure improvements or mitigation of development challenges. There are many conditions to be considered in investing significant dollars on speculative site improvements including market, economic, fiscal, real estate, and political factors. While the information provided through the SSI Phase II study should not be exclusively considered for site improvement expenditures, the findings may provide an initial quasi prospectus on site development expenditure and associated return-on-investment (ROI).

Site Marketing

The best greenfield site in America is of no consequence to the host community if industry prospects are unaware of its value and availability. Many EDOs invest in branding and marketing campaigns to showcase their community's differentiating attributes to attract business investment. If prematurely launched, many communities unfortunately become "the dog that caught the car". The well-qualified community successfully attracts the serious interest of a prospective company only to lose the project, and possibly credibility for future projects, because it fails to offer a competitive site.

It is the opinion of LL+D, based on extensive industrial and commercial site selection experience, that the methodology, objectivity, and level of detail and completeness provided in this report are sufficient to

support the competitive claims of the subject site for its intended project land use(s). Accordingly, the information contained in this report can and should be used to supplement site marketing materials, specifically for RFI responses and proactive target industry solicitations. However, EDOs should exercise judicious use of SSI Phase II site information for the purposes of site marketing in advance of formal landowner engagement and securing a real estate purchase option. The real estate purchase option is pursued during SSI Phase III: Landowner Engagement.

Warranty

All Phase II project tasks are intended to serve as an informed guide to determination of site advancement to the formal due diligence phase of inventory development. All information and opinions provided in this report are limited to planning-level engineering and environmental considerations and do not rise to the investigative level of study for site design uses.

This study draws on a combination of public domain data, licensed commercial data, proprietary third-party reports, and materials provided by the landowners and county. Findings derived from these sources are subject to potential errors and omissions involving spatial and attribute accuracy, completeness, and currency. Data and other information cited in this study have not been independently verified for accuracy unless expressly stated. As such, the confidence in findings provided herein and corresponding opinions are subject to the limitations of the data and other information sources consulted in the conduct of this study.

Ultimate site development potential and fatal flaw analysis cannot be determined without physically visiting the site and conducting formal engineering and environmental due diligence. However, Leotta Location and Design is confident that our site screening methodology is highly effective in eliminating low quality or practically undevelopable sites and presents candidate sites with a high likelihood of confirming results through more formal engineering and environmental due diligence.

APPENDIX A


SITE MAPS

SSI Phase II: Preliminary Due Diligence

Monroe County, Indiana

Site ID: 18105-001 (179.4 acres)

BLOOMINGTON BEDC ECONOMIC DEVELOPMENT

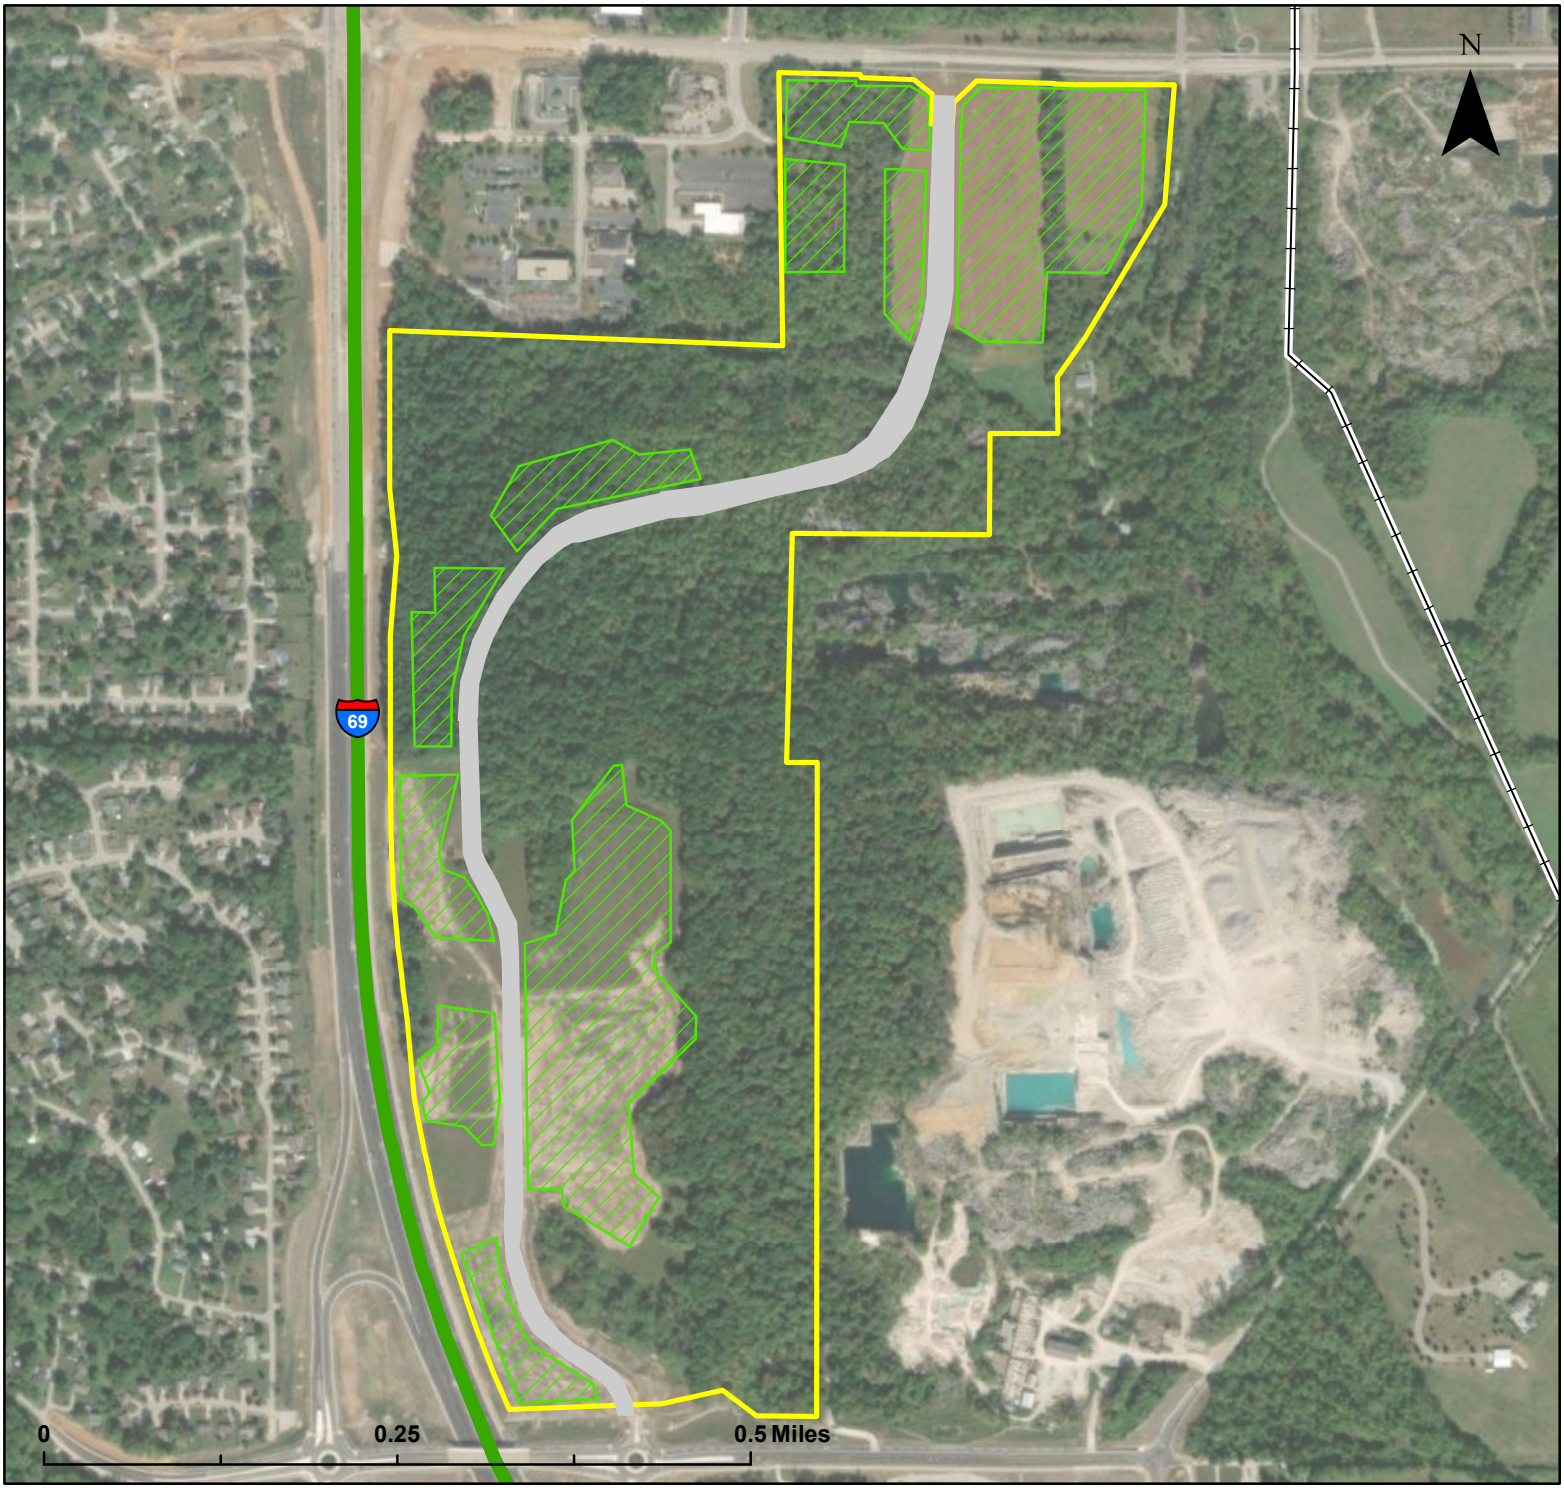

- Interstate
- Rail
- FullertonPike_TappRd_Connection_FINAL
- Site Boundary
- Buildable Area

SITE MAP

Site: ~179.4 acres

Buildable Area: ~48.5 acres


SSI Phase II sponsored by: DUKE ENERGY

SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Monroe County, Indiana

Site ID: 18105-001 (179.4 acres)

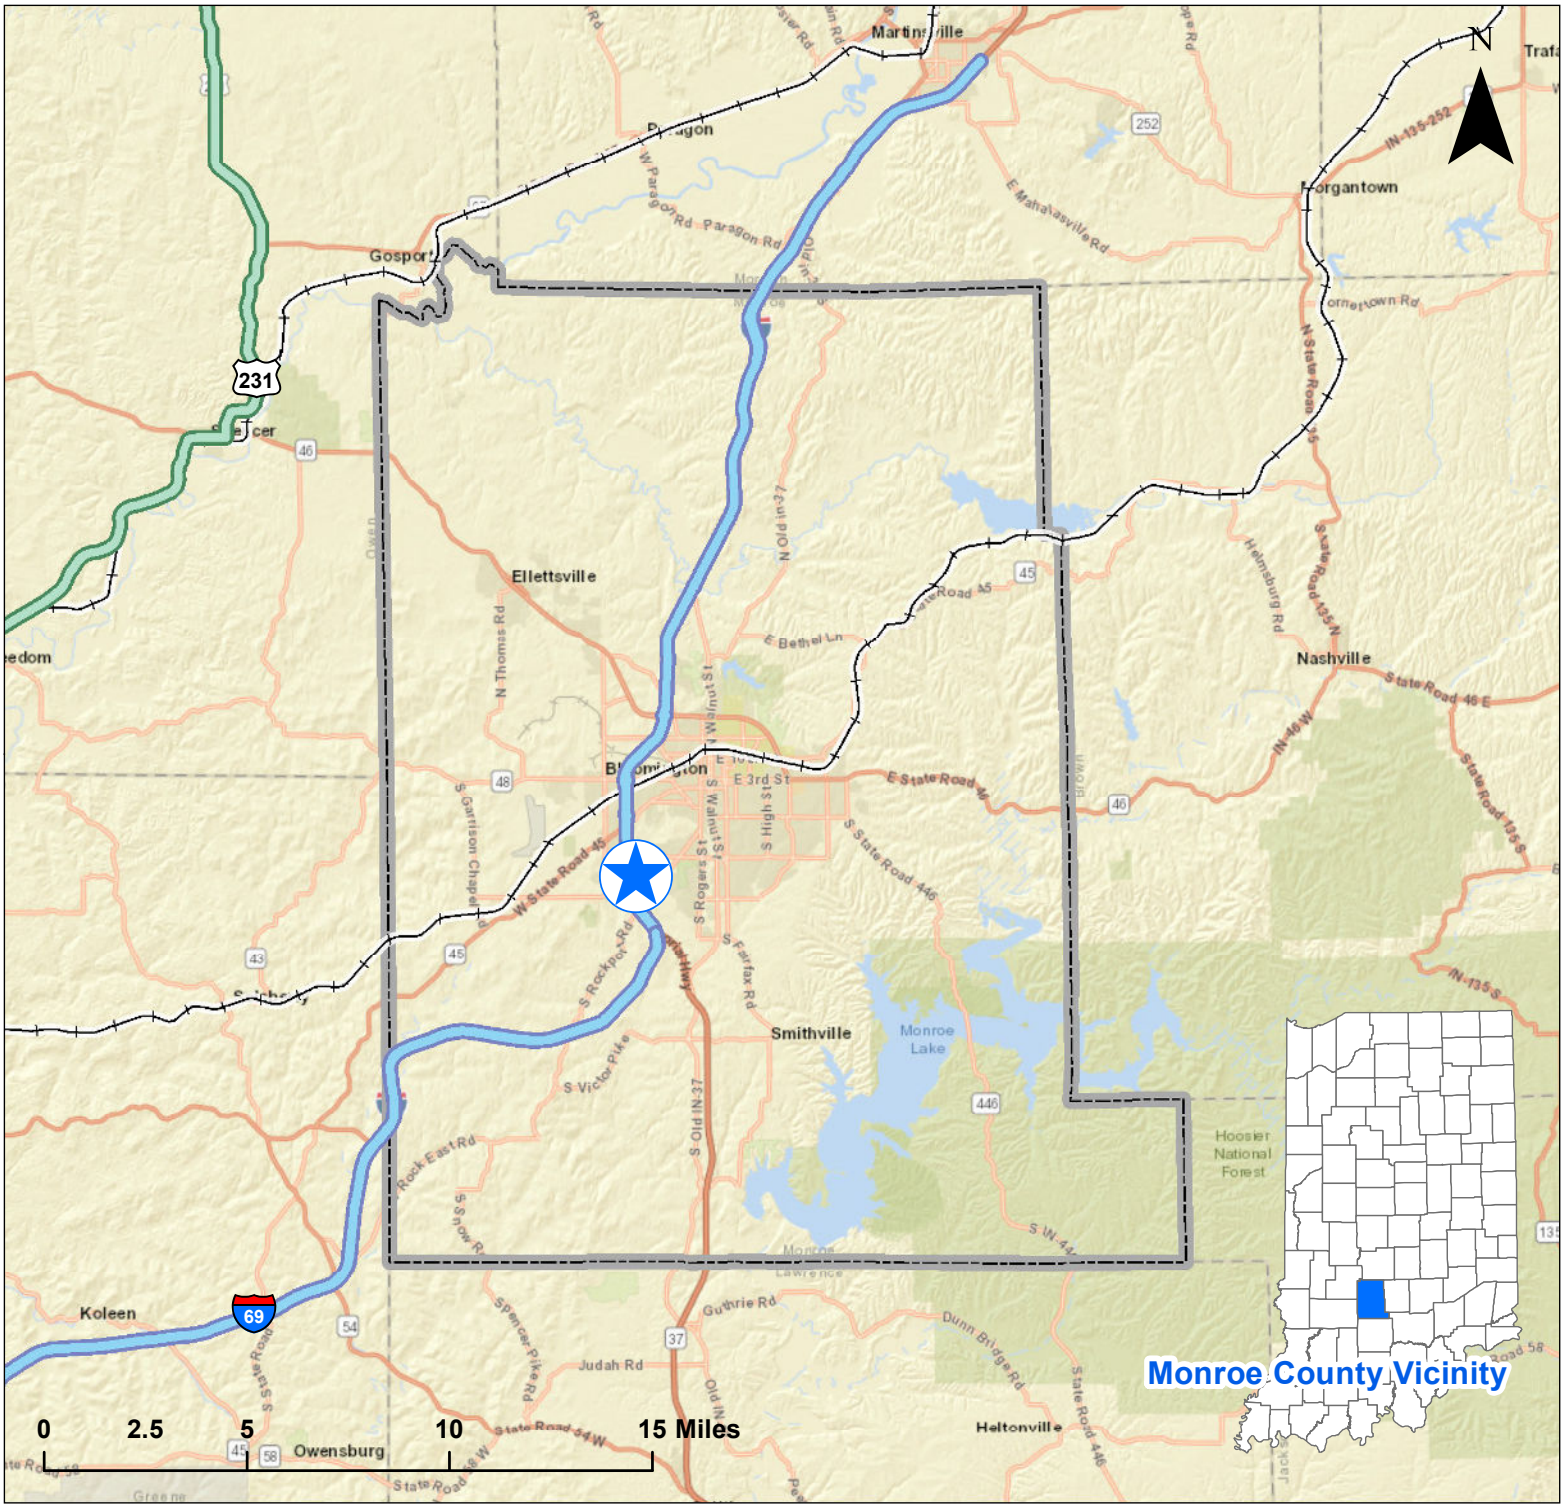

Legend

- Site Point
- Interstate
- U.S. Highway
- Class I Railroad
- Monroe County

SITE VICINITY

Monroe County, Indiana

SSI Phase II sponsored by: DUKE ENERGY


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Monroe County, Indiana

Site ID: 18105-001 (179.4 acres)

BLOOMINGTON BEDC ECONOMIC DEVELOPMENT

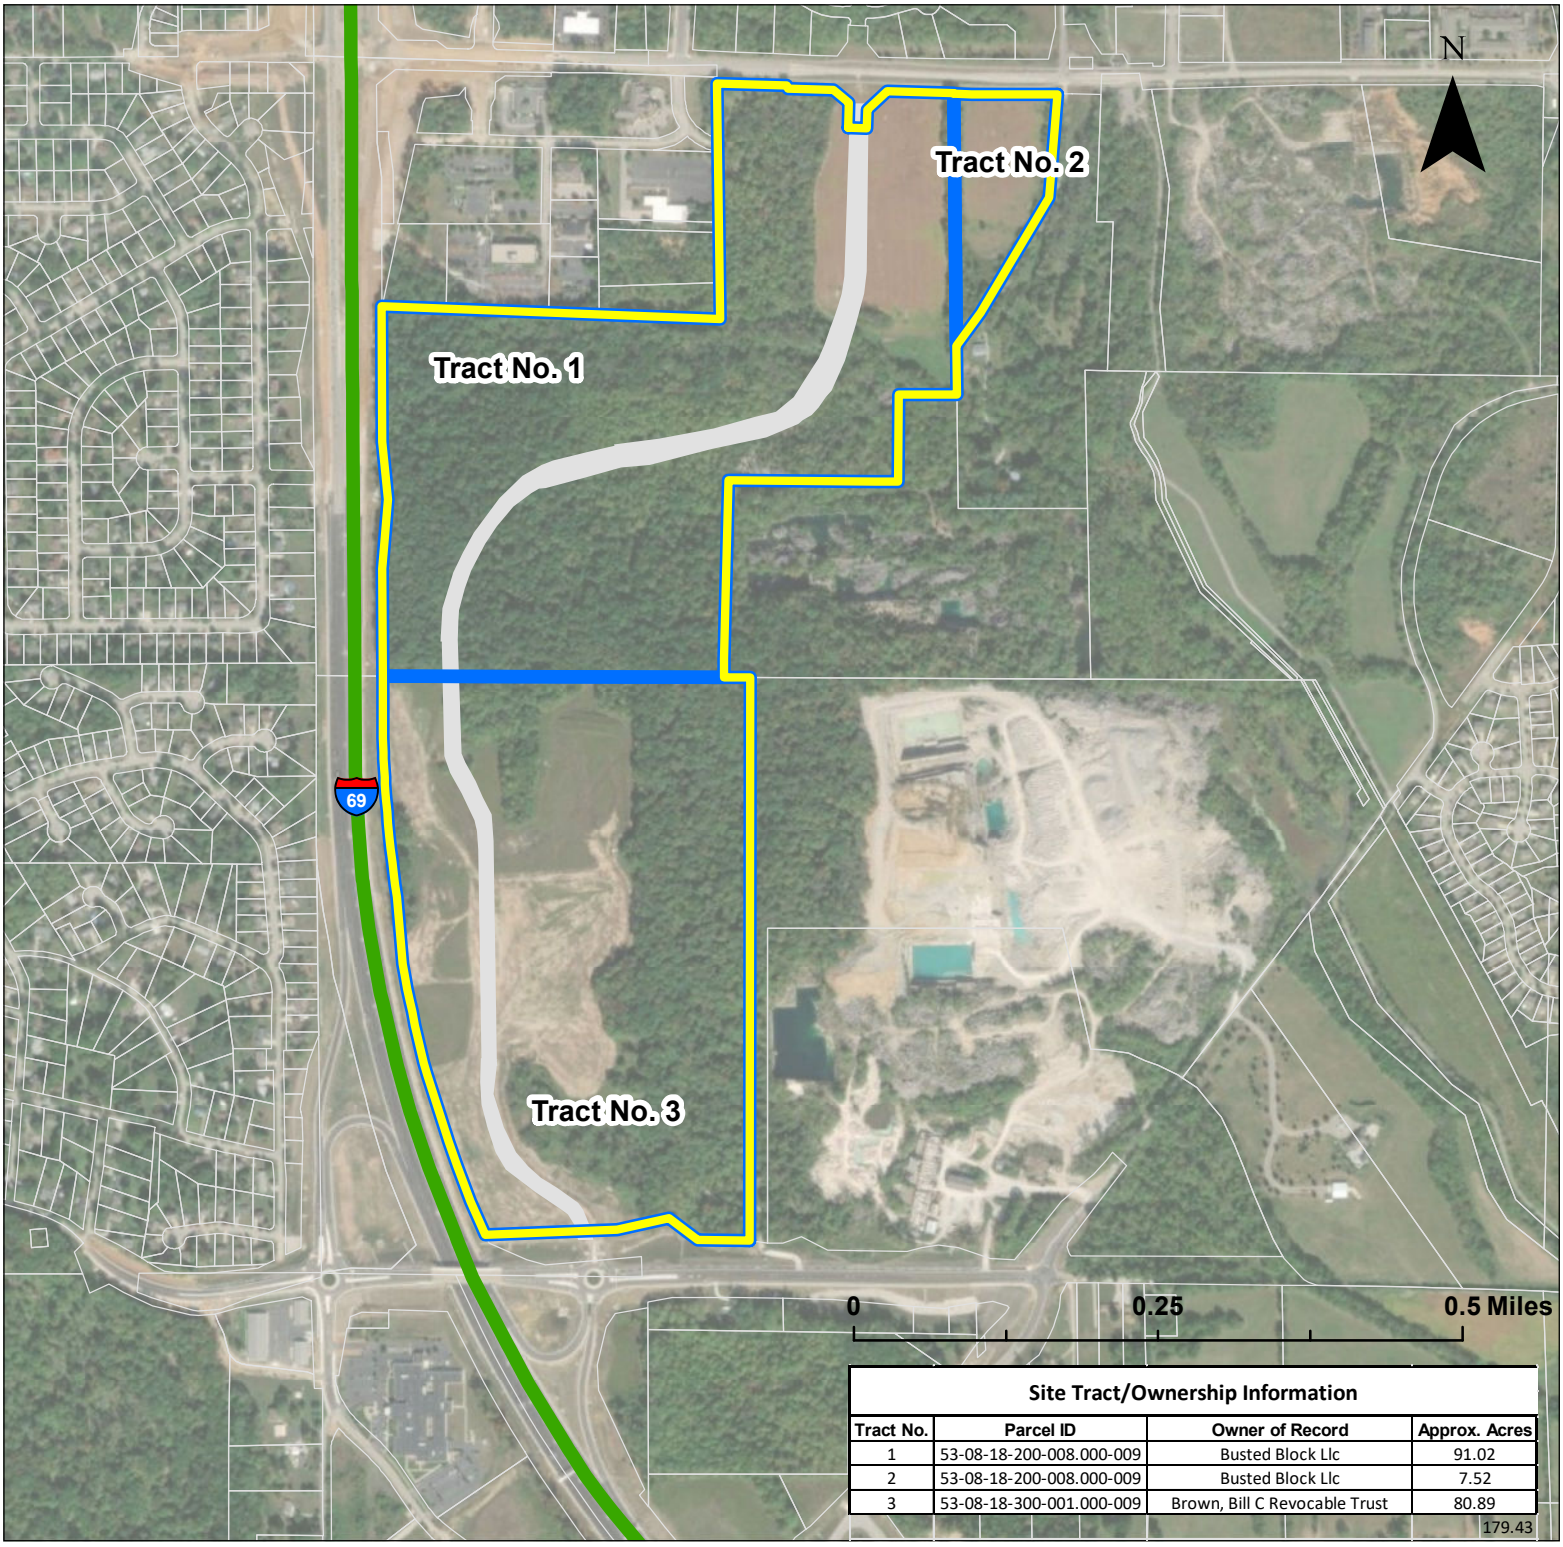

Site Tract/Ownership Information			
Tract No.	Parcel ID	Owner of Record	Approx. Acres
1	53-08-18-200-008.000-009	Busted Block Llc	91.02
2	53-08-18-200-008.000-009	Busted Block Llc	7.52
3	53-08-18-300-001.000-009	Brown, Bill C Revocable Trust	80.89
			179.43

Legend

- Interstate
- Fullerton Pike Tapp Rd. Connection
- Site Boundary
- Site Parcel
- Parcel

SITE PARCEL CONFIGURATION

SSI Phase II sponsored by: DUKE ENERGY®


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Monroe County, Indiana

Site ID: 18105-001 (179.4 acres)

BLOOMINGTON BEDC ECONOMIC DEVELOPMENT

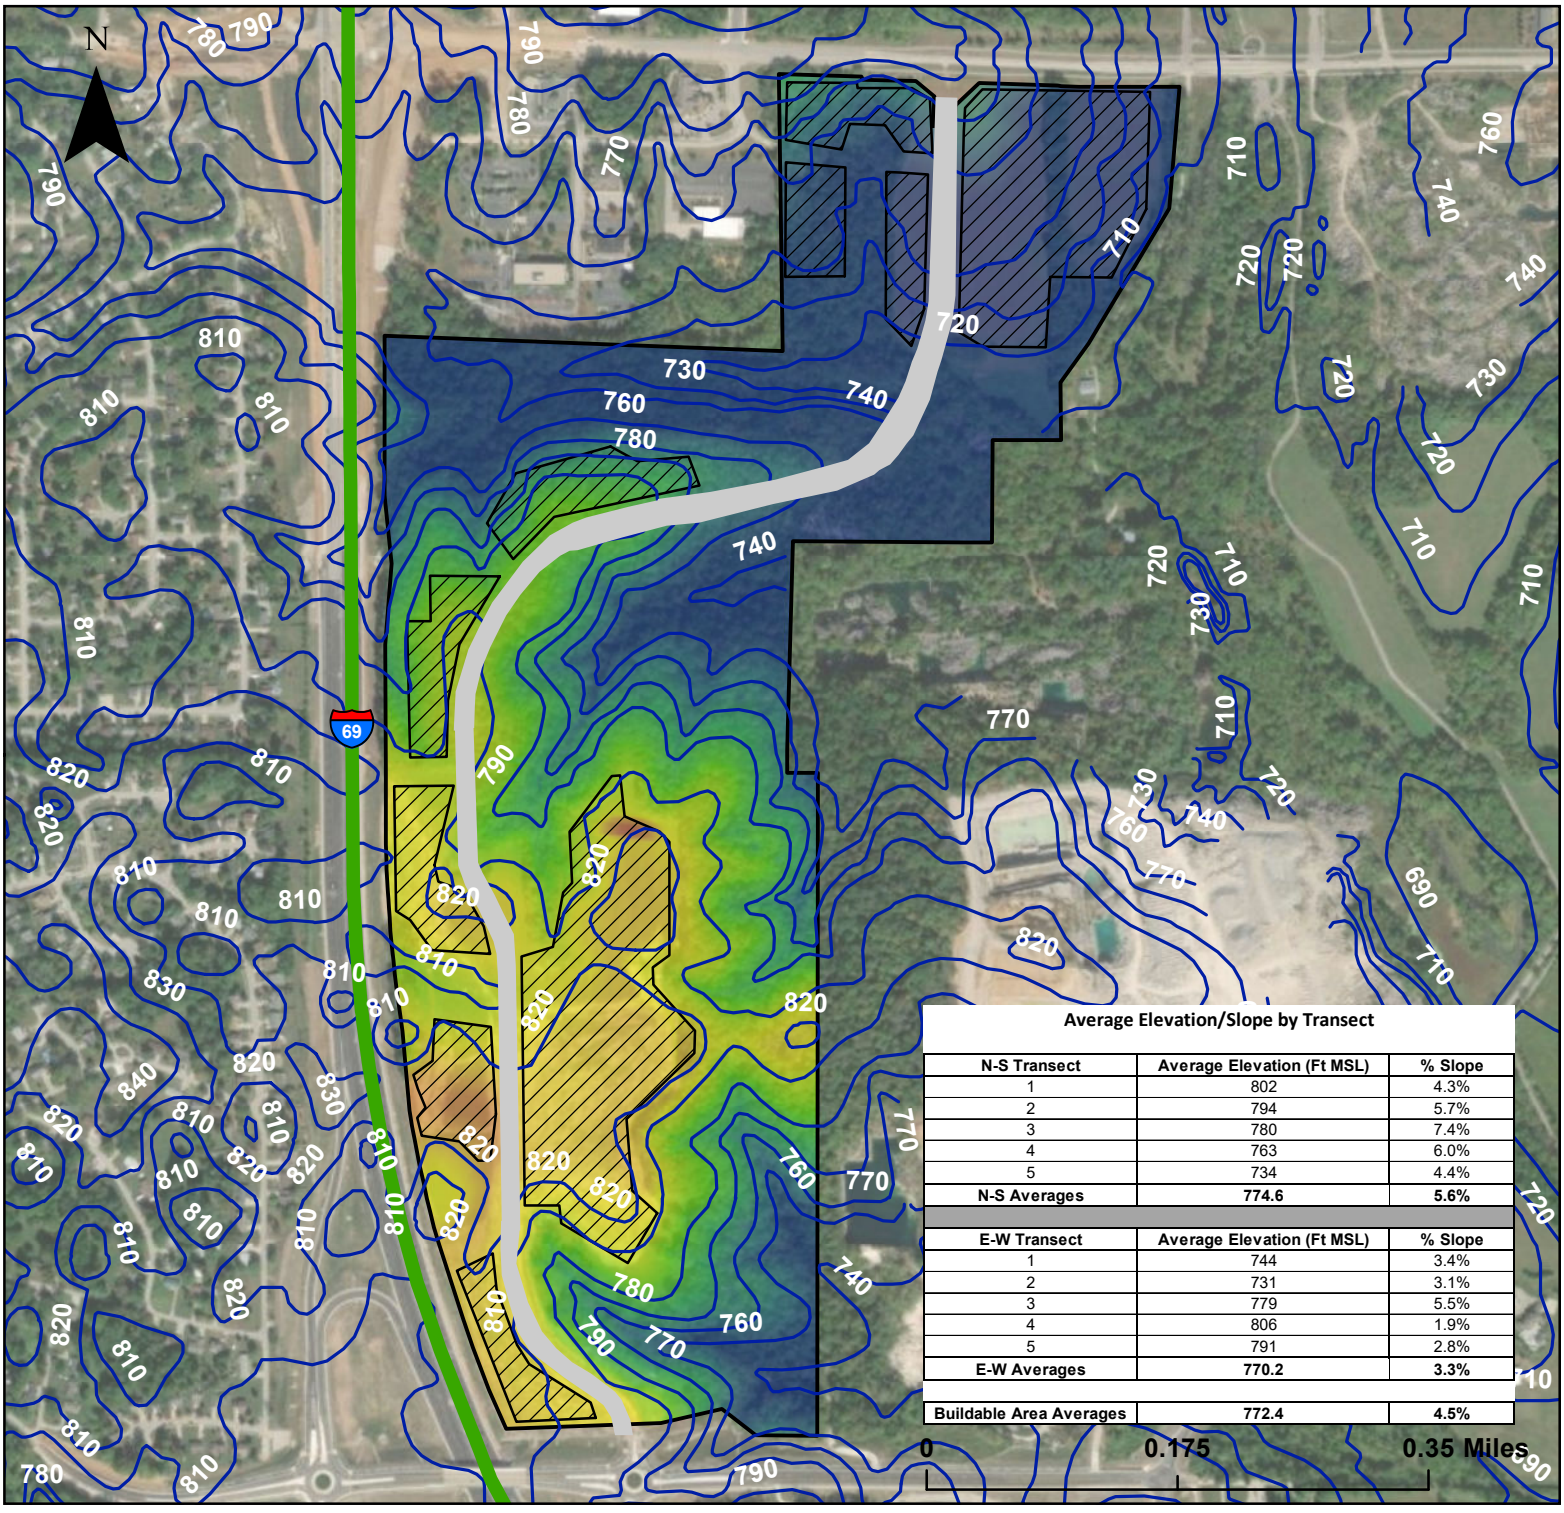

Average Elevation/Slope by Transect

N-S Transect	Average Elevation (Ft MSL)	% Slope
1	802	4.3%
2	794	5.7%
3	780	7.4%
4	763	6.0%
5	734	4.4%
N-S Averages	**774.6**	**5.6%**

E-W Transect	Average Elevation (Ft MSL)	% Slope
1	744	3.4%
2	731	3.1%
3	779	5.5%
4	806	1.9%
5	791	2.8%
E-W Averages	**770.2**	**3.3%**

Buildable Area Averages	**772.4**	**4.5%**

Legend

- Fullerton Pike Tapp Rd. Connection
- Interstate
- Contours - 10 ft
- Site Boundary
- Buildable Area

Value (ft)

High : 823

Low : 738

BUILDABLE AREA ELEVATION/SLOPE

LiDAR-derived Digital Elevation Model


SSI Phase II sponsored by: DUKE ENERGY

SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Monroe County, Indiana

Site ID: 18105-001 (179.4 acres)

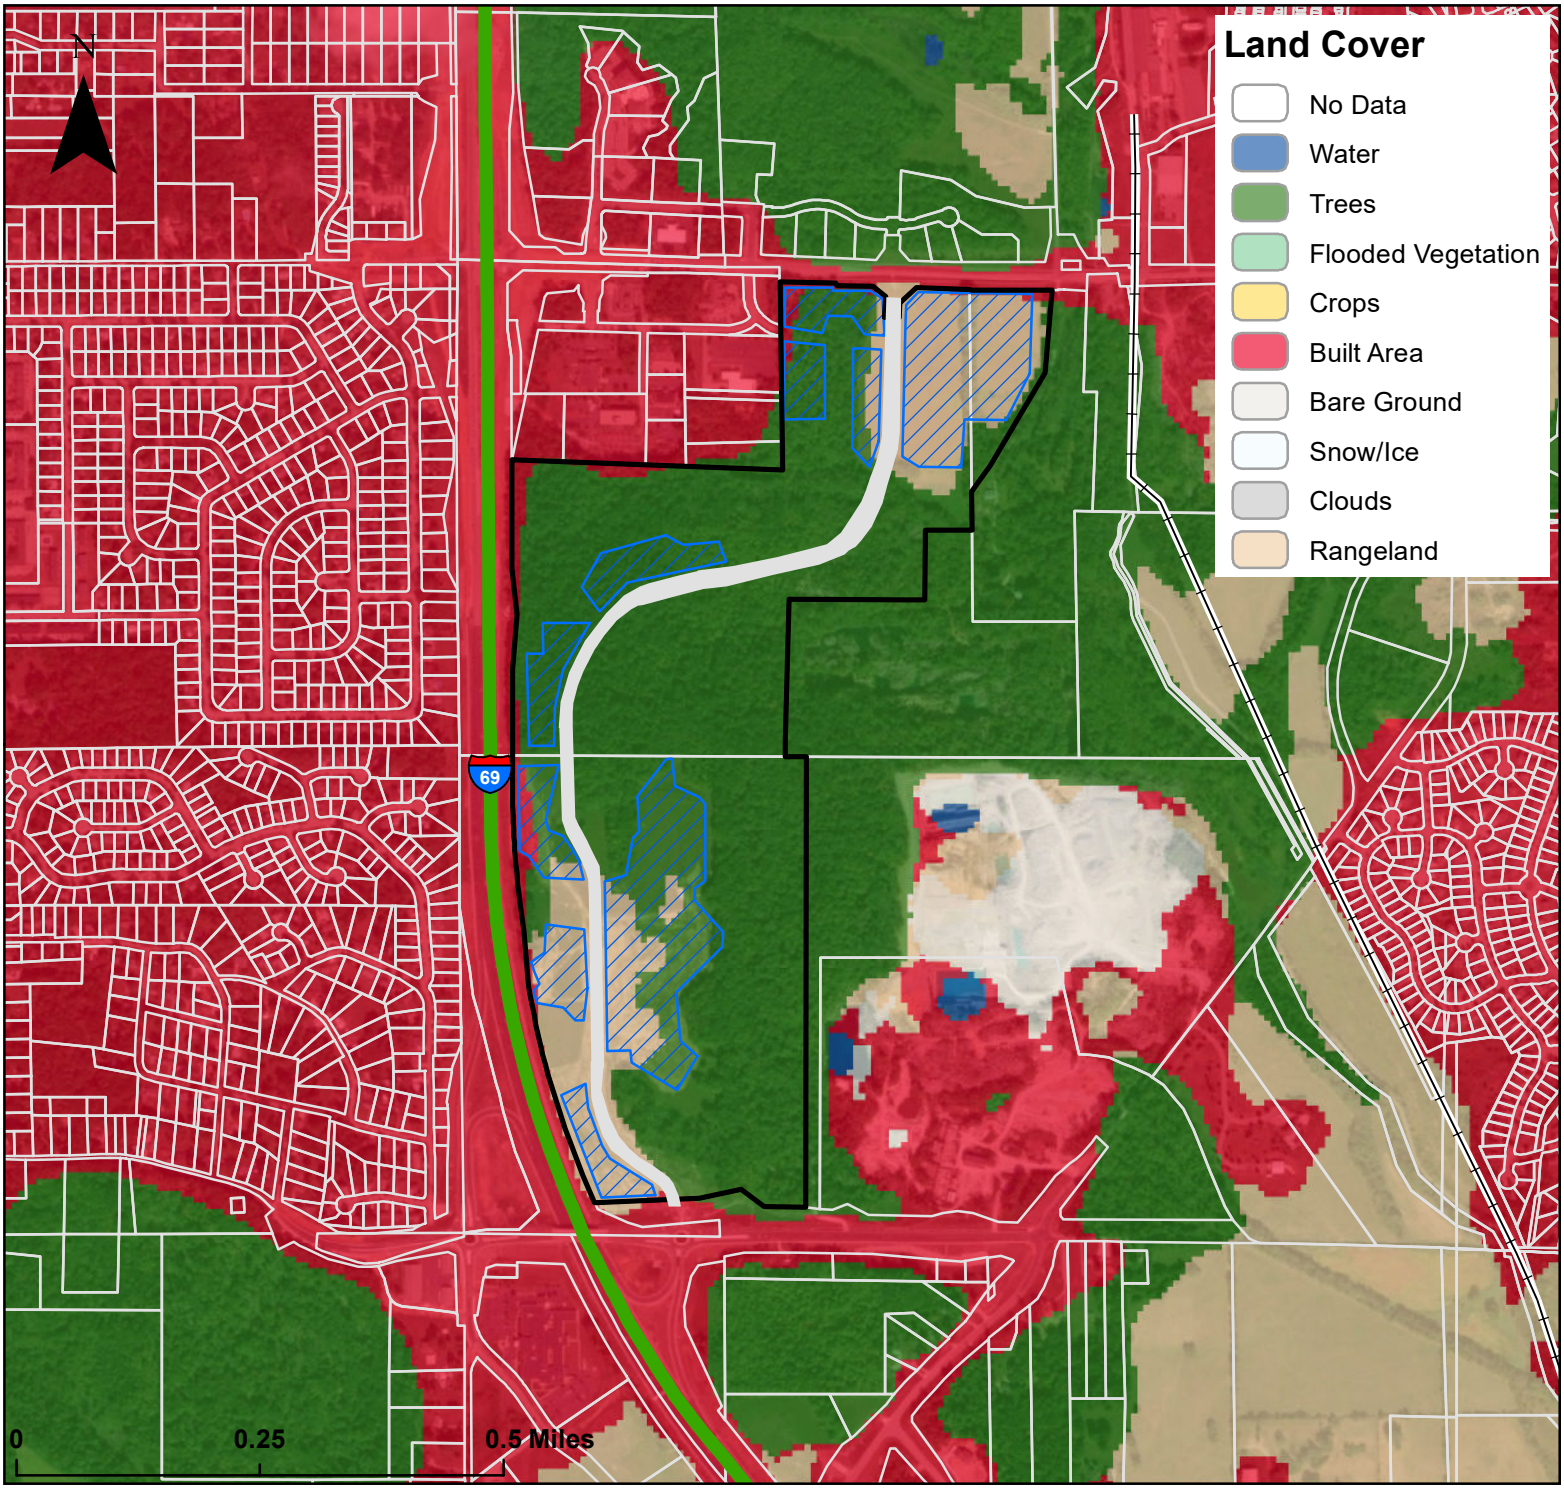

LAND COVER CLASSIFICATIONS

Indiana 2017-2021 Land Cover Map

Interstate

Rail

Fullerton Pike Tapp Rd. Connection

Site Boundary

Buildable Area

Parcel

SSI Phase II sponsored by:


SSI Phase II conducted by:

SSI Phase II: Preliminary Due Diligence

Monroe County, Indiana

Site ID: 18105-001 (179.4 acres)

BLOOMINGTON BEDC ECONOMIC DEVELOPMENT

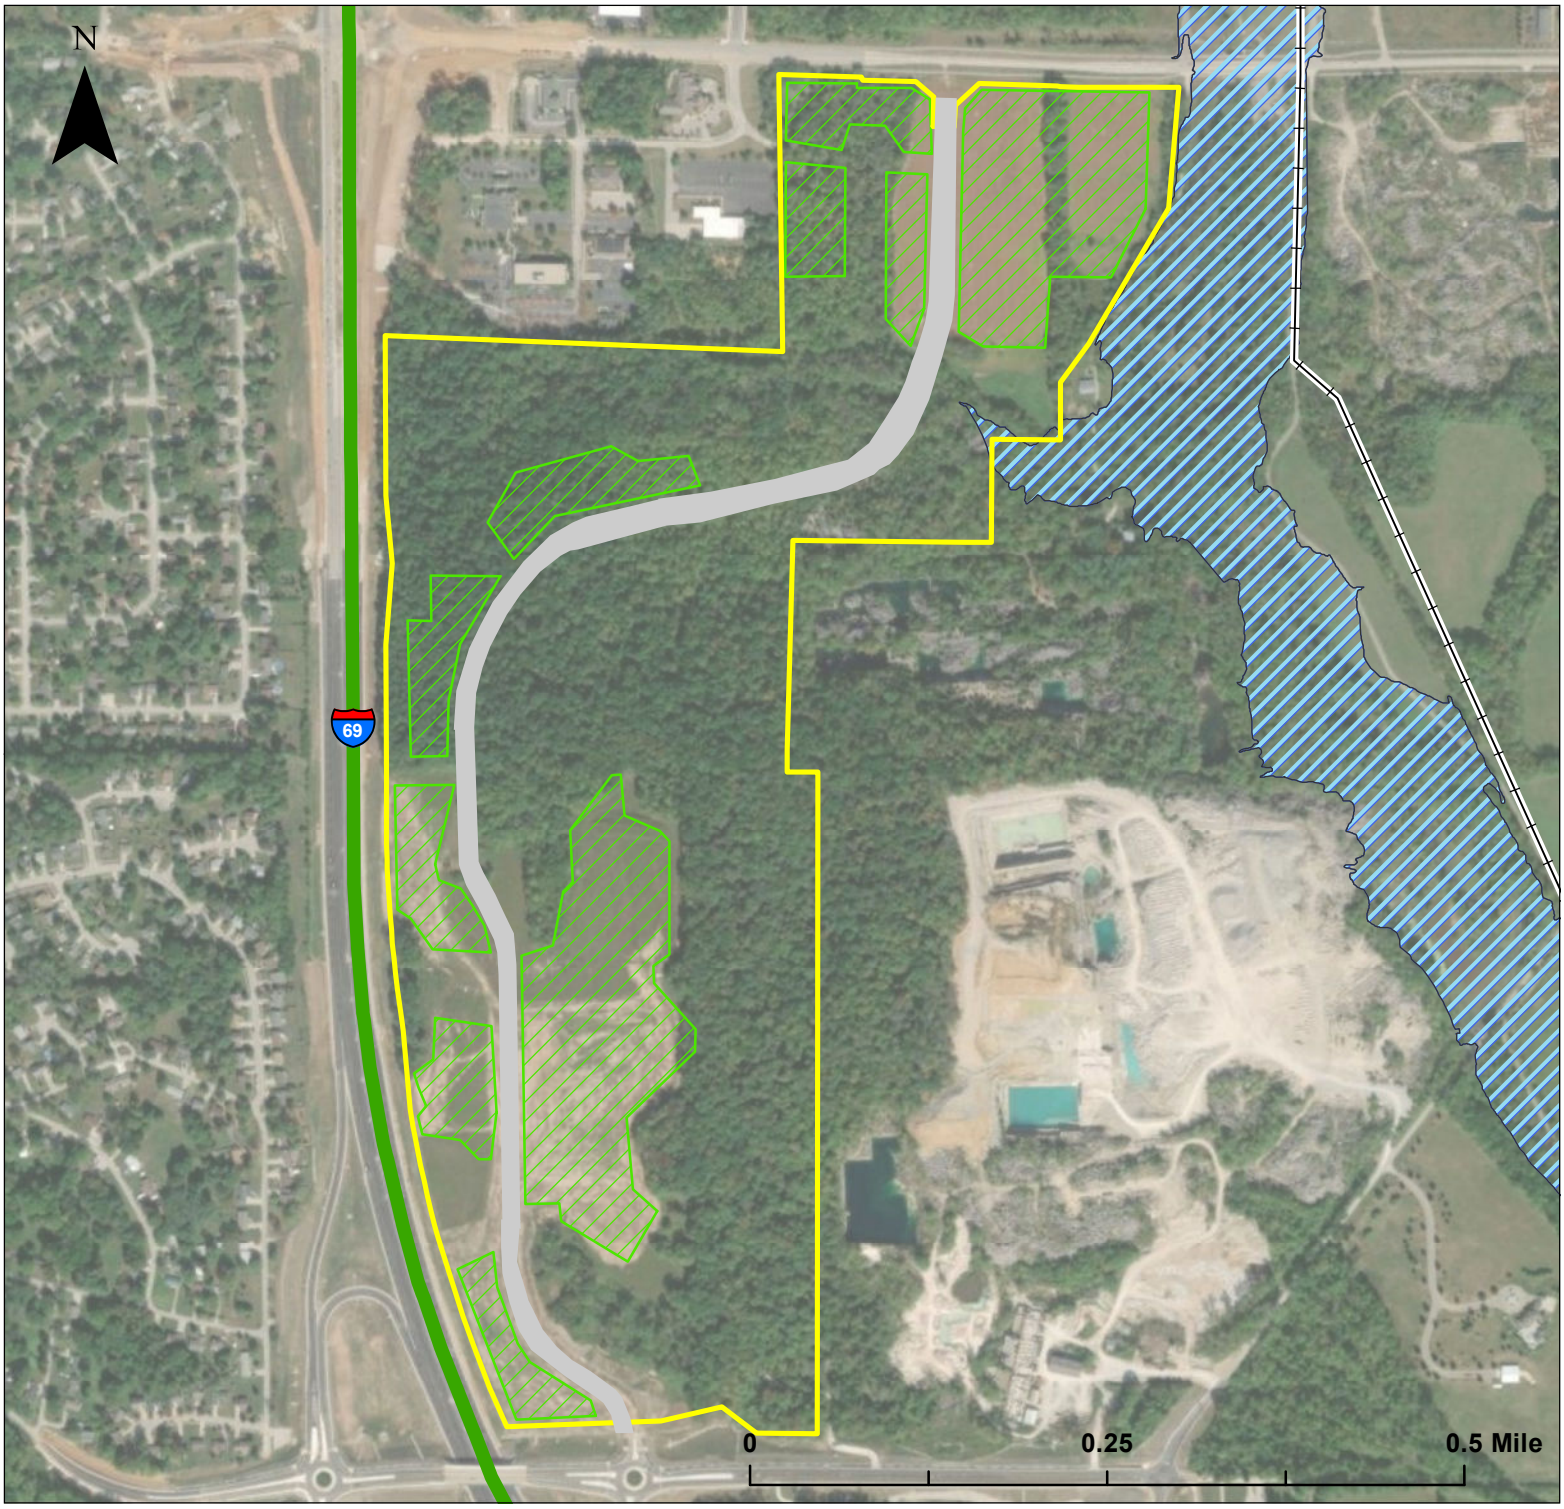

Fullerton Pike Tapp Rd. Connection

Interstate

Rail

Site Boundary

Buildable Area

Flood Zone

AE

X

Potential Flood Hazard

FEMA National Flood Hazard Layer

SSI Phase II sponsored by: DUKE ENERGY


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Monroe County, Indiana

Site ID: 18105-001 (179.4 acres)

BLOOMINGTON BEDC ECONOMIC DEVELOPMENT

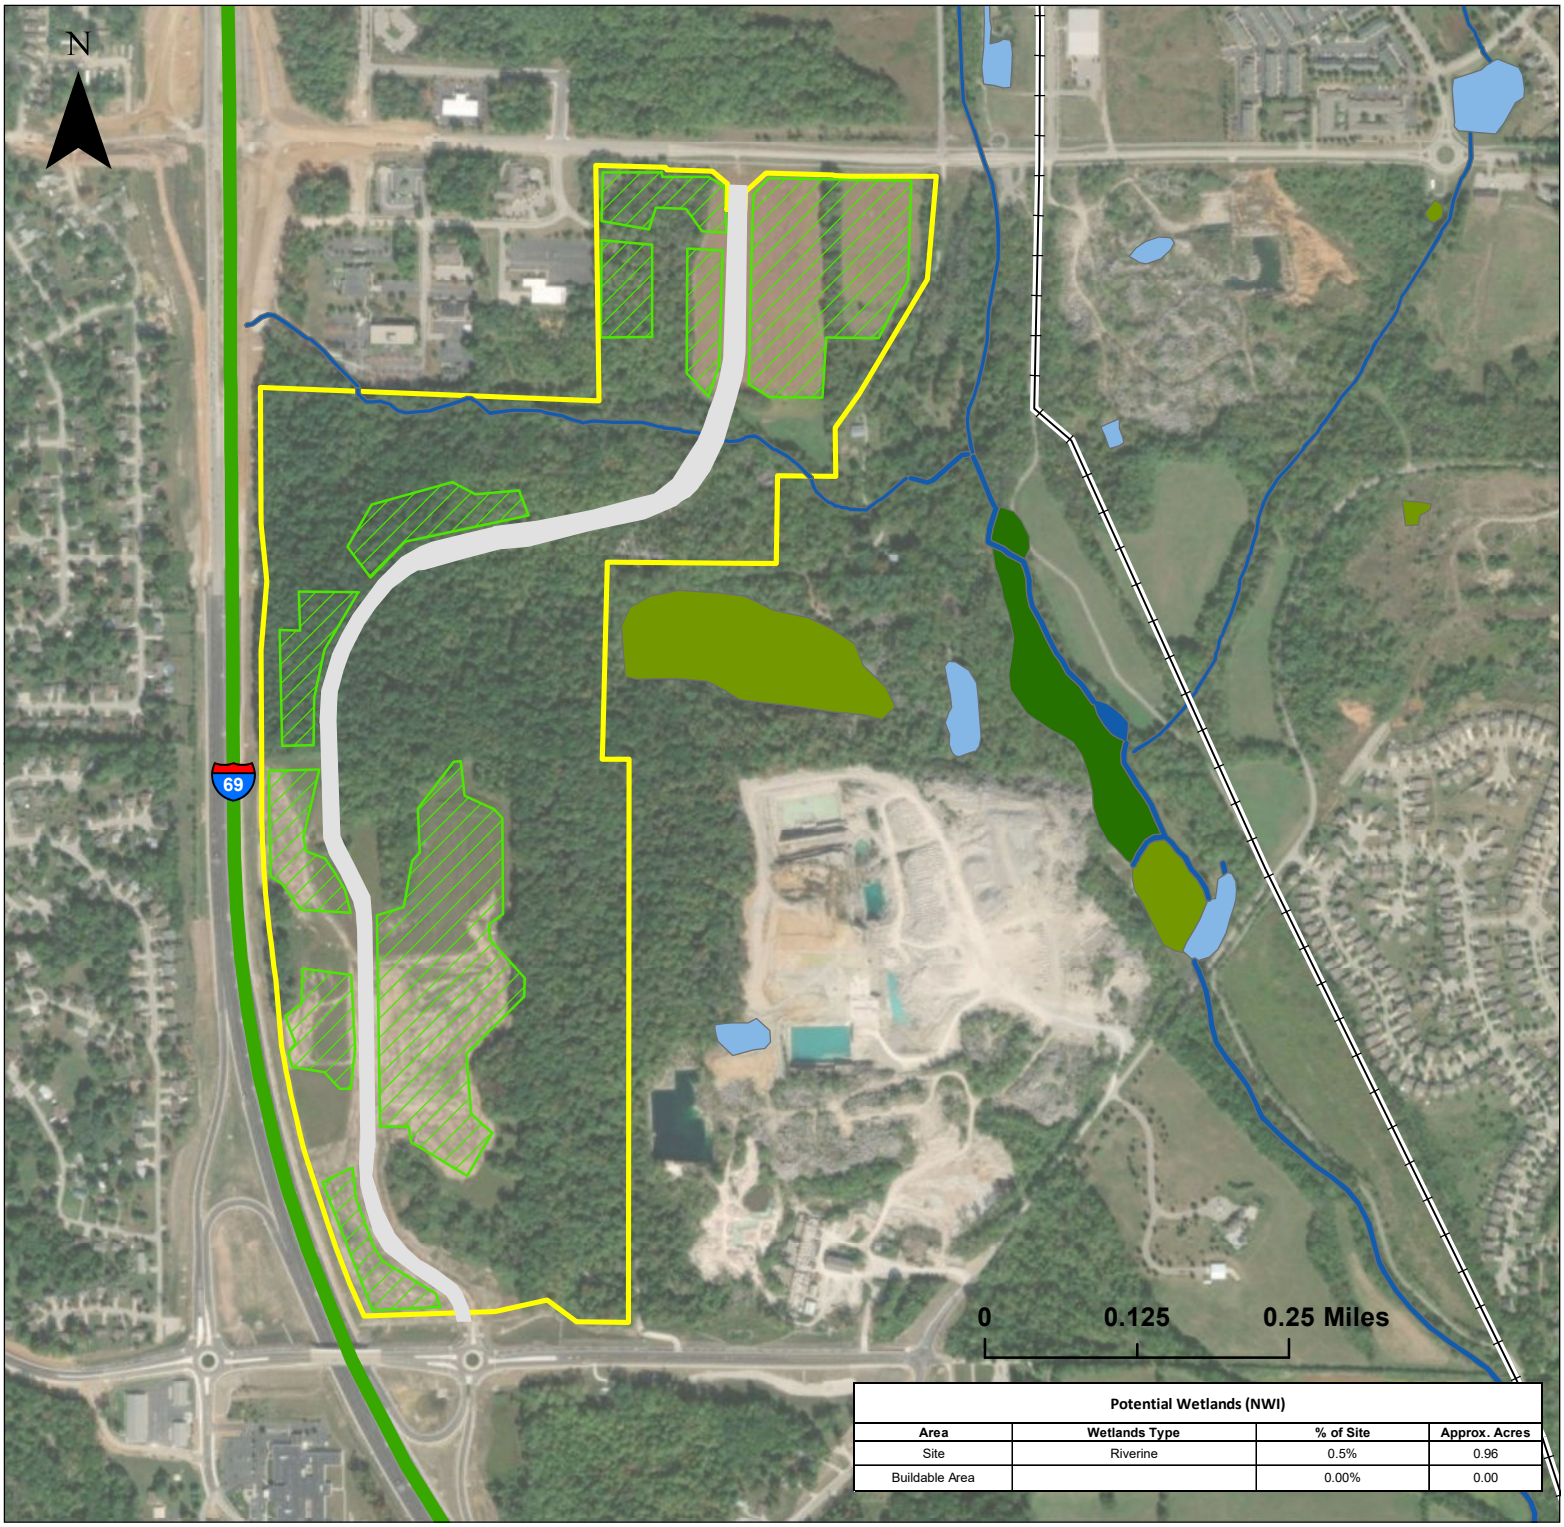

Potential Wetlands (NWI)			
Area	Wetlands Type	% of Site	Approx. Acres
Site	Riverine	0.5%	0.96
Buildable Area		0.00%	0.00

Fullerton Pike Tapp Rd. Connection
Interstate
Rail
Site Boundary
Buildable Area

National Wetlands Inventory

Potential Wetland Type

Freshwater Emergent Wetland
Freshwater Forested/Shrub Wetland
Freshwater Pond
Riverine

Potential Wetlands

USFW/USGS National Wetlands Inventory


SSI Phase II sponsored by: DUKE ENERGY

SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Monroe County, Indiana

Site ID: 18105-001 (179.4 acres)

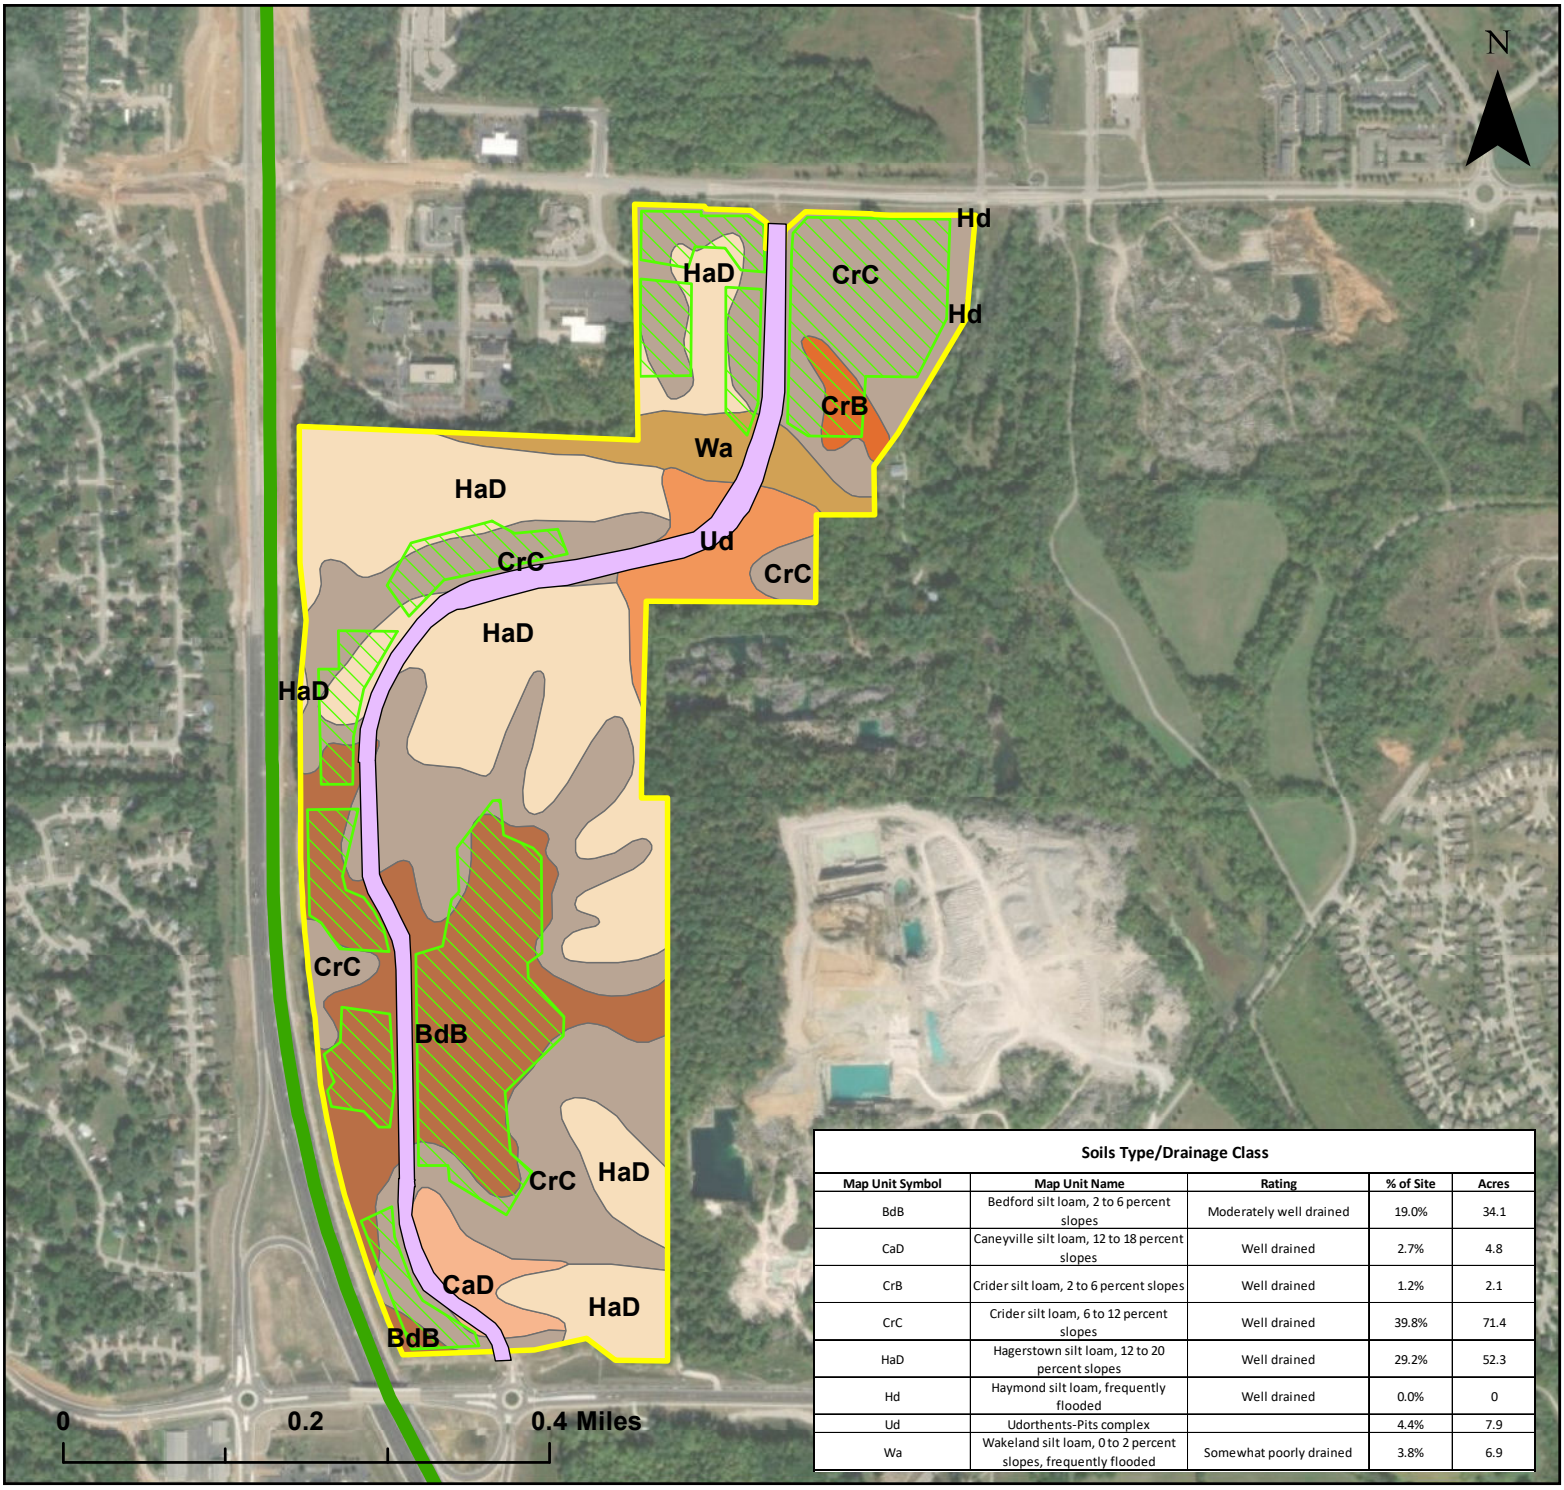

Soils Type/Drainage Class				
Map Unit Symbol	Map Unit Name	Rating	% of Site	Acres
BdB	Bedford silt loam, 2 to 6 percent slopes	Moderately well drained	19.0%	34.1
CaD	Caneyville silt loam, 12 to 18 percent slopes	Well drained	2.7%	4.8
CrB	Crider silt loam, 2 to 6 percent slopes	Well drained	1.2%	2.1
CrC	Crider silt loam, 6 to 12 percent slopes	Well drained	39.8%	71.4
HaD	Hagerstown silt loam, 12 to 20 percent slopes	Well drained	29.2%	52.3
Hd	Haymond silt loam, frequently flooded	Well drained	0.0%	0
Ud	Udorthents-Pits complex		4.4%	7.9
Wa	Wakeland silt loam, 0 to 2 percent slopes, frequently flooded	Somewhat poorly drained	3.8%	6.9

Legend

- Interstate
- Connector Road
- Site Boundary
- Buildable Area

Soil Type

- BdB
- CaD
- CrB
- CrC
- HaD
- Hd
- Ud
- Wa

SSURGO SOILS

Map Unit Name, Percent Slopes

SSI Phase II sponsored by: DUKE ENERGY


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Monroe County, Indiana

Site ID: 18105-001 (179.4 acres)

BLOOMINGTON BEDC ECONOMIC DEVELOPMENT

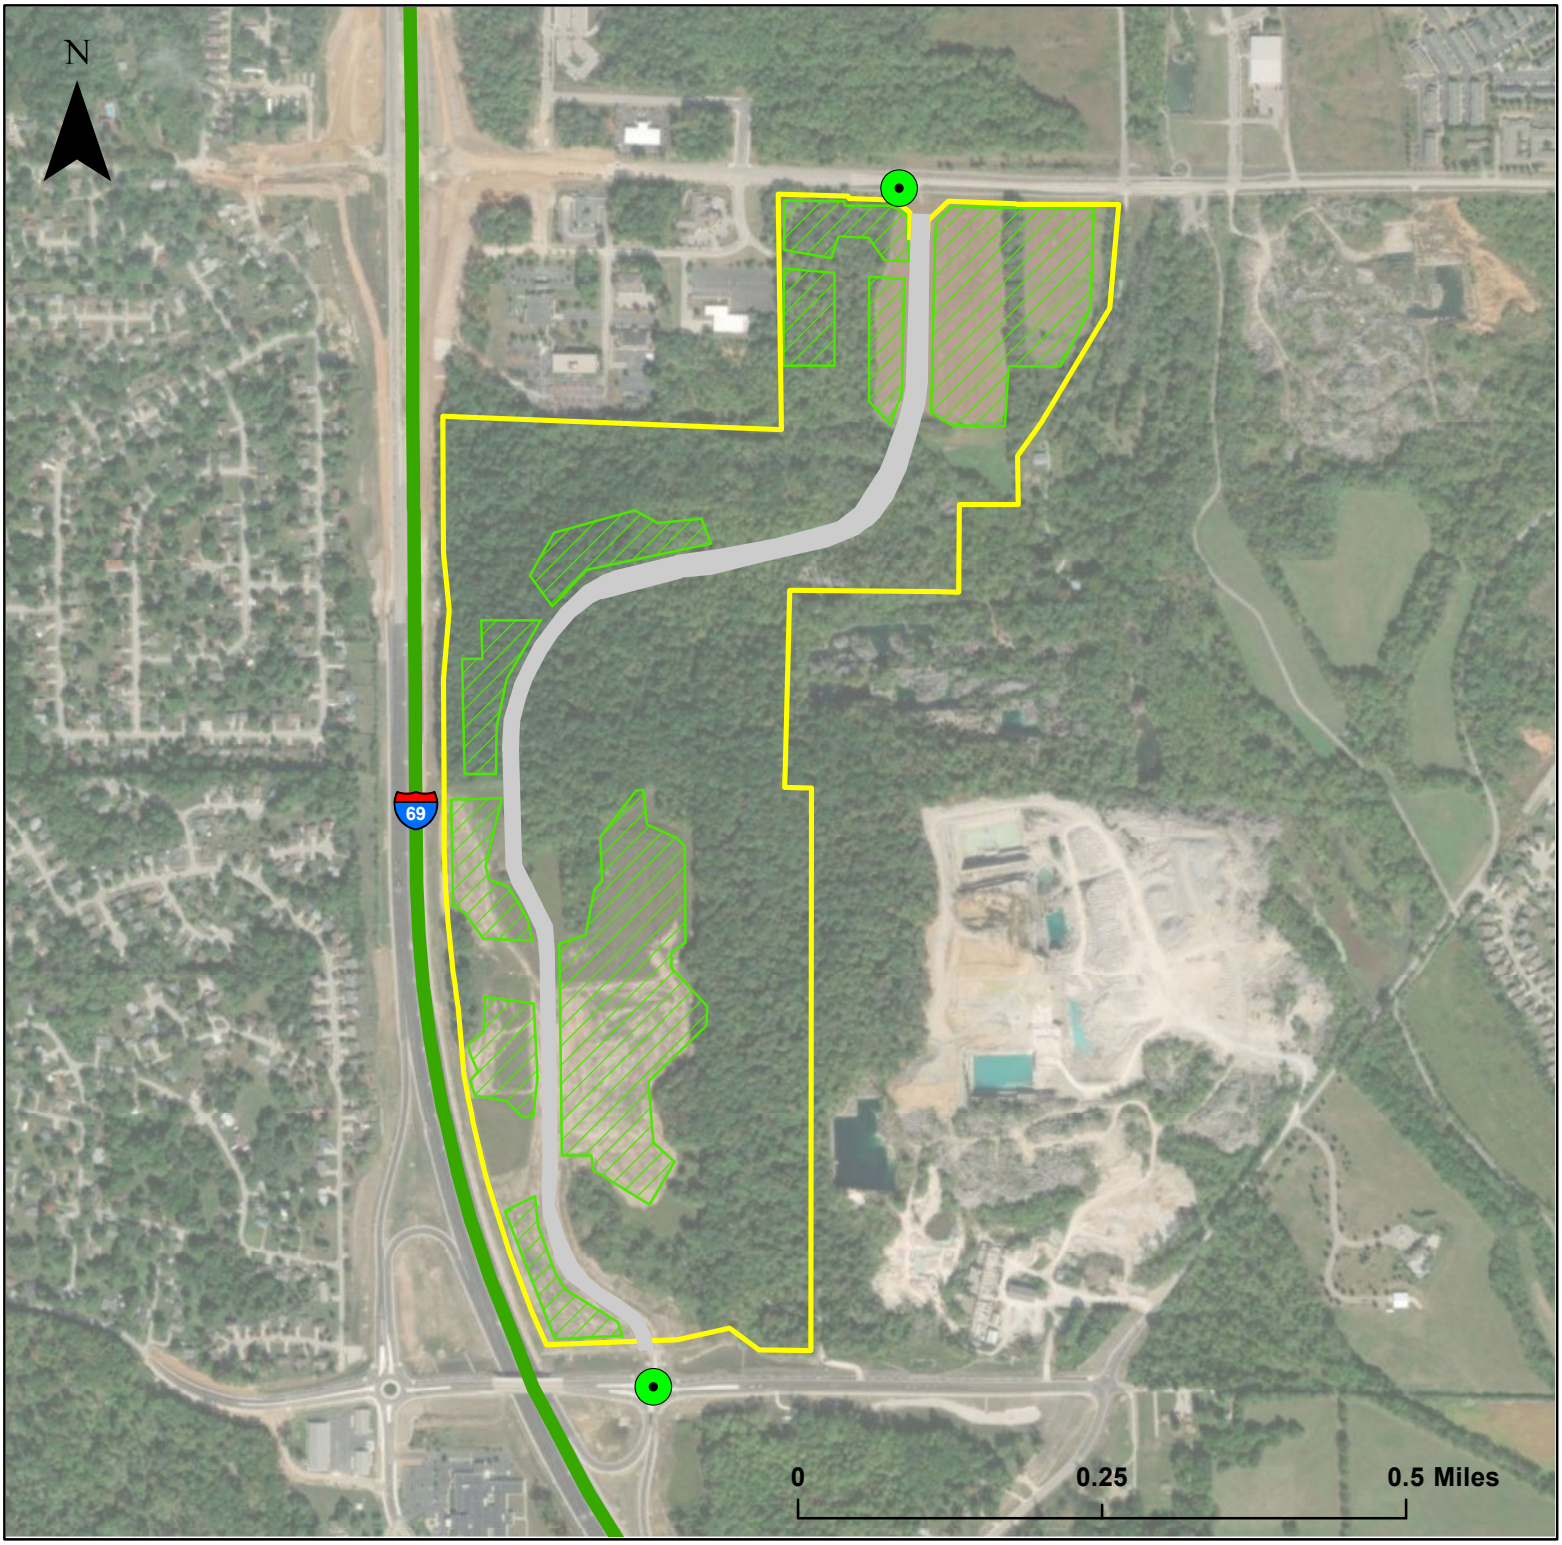

Legend

- Potential Egress/Ingress Point
- Fullerton Pike Tapp Rd. Connection
- Interstate
- Site Boundary
- Buildable Area

SITE TRANSPORTATION FEATURES

with Potential Site Access Points

SSI Phase II sponsored by: DUKE ENERGY


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Monroe County, Indiana

Site ID: 18105-001 (179.4 acres)

BLOOMINGTON BEDC ECONOMIC DEVELOPMENT

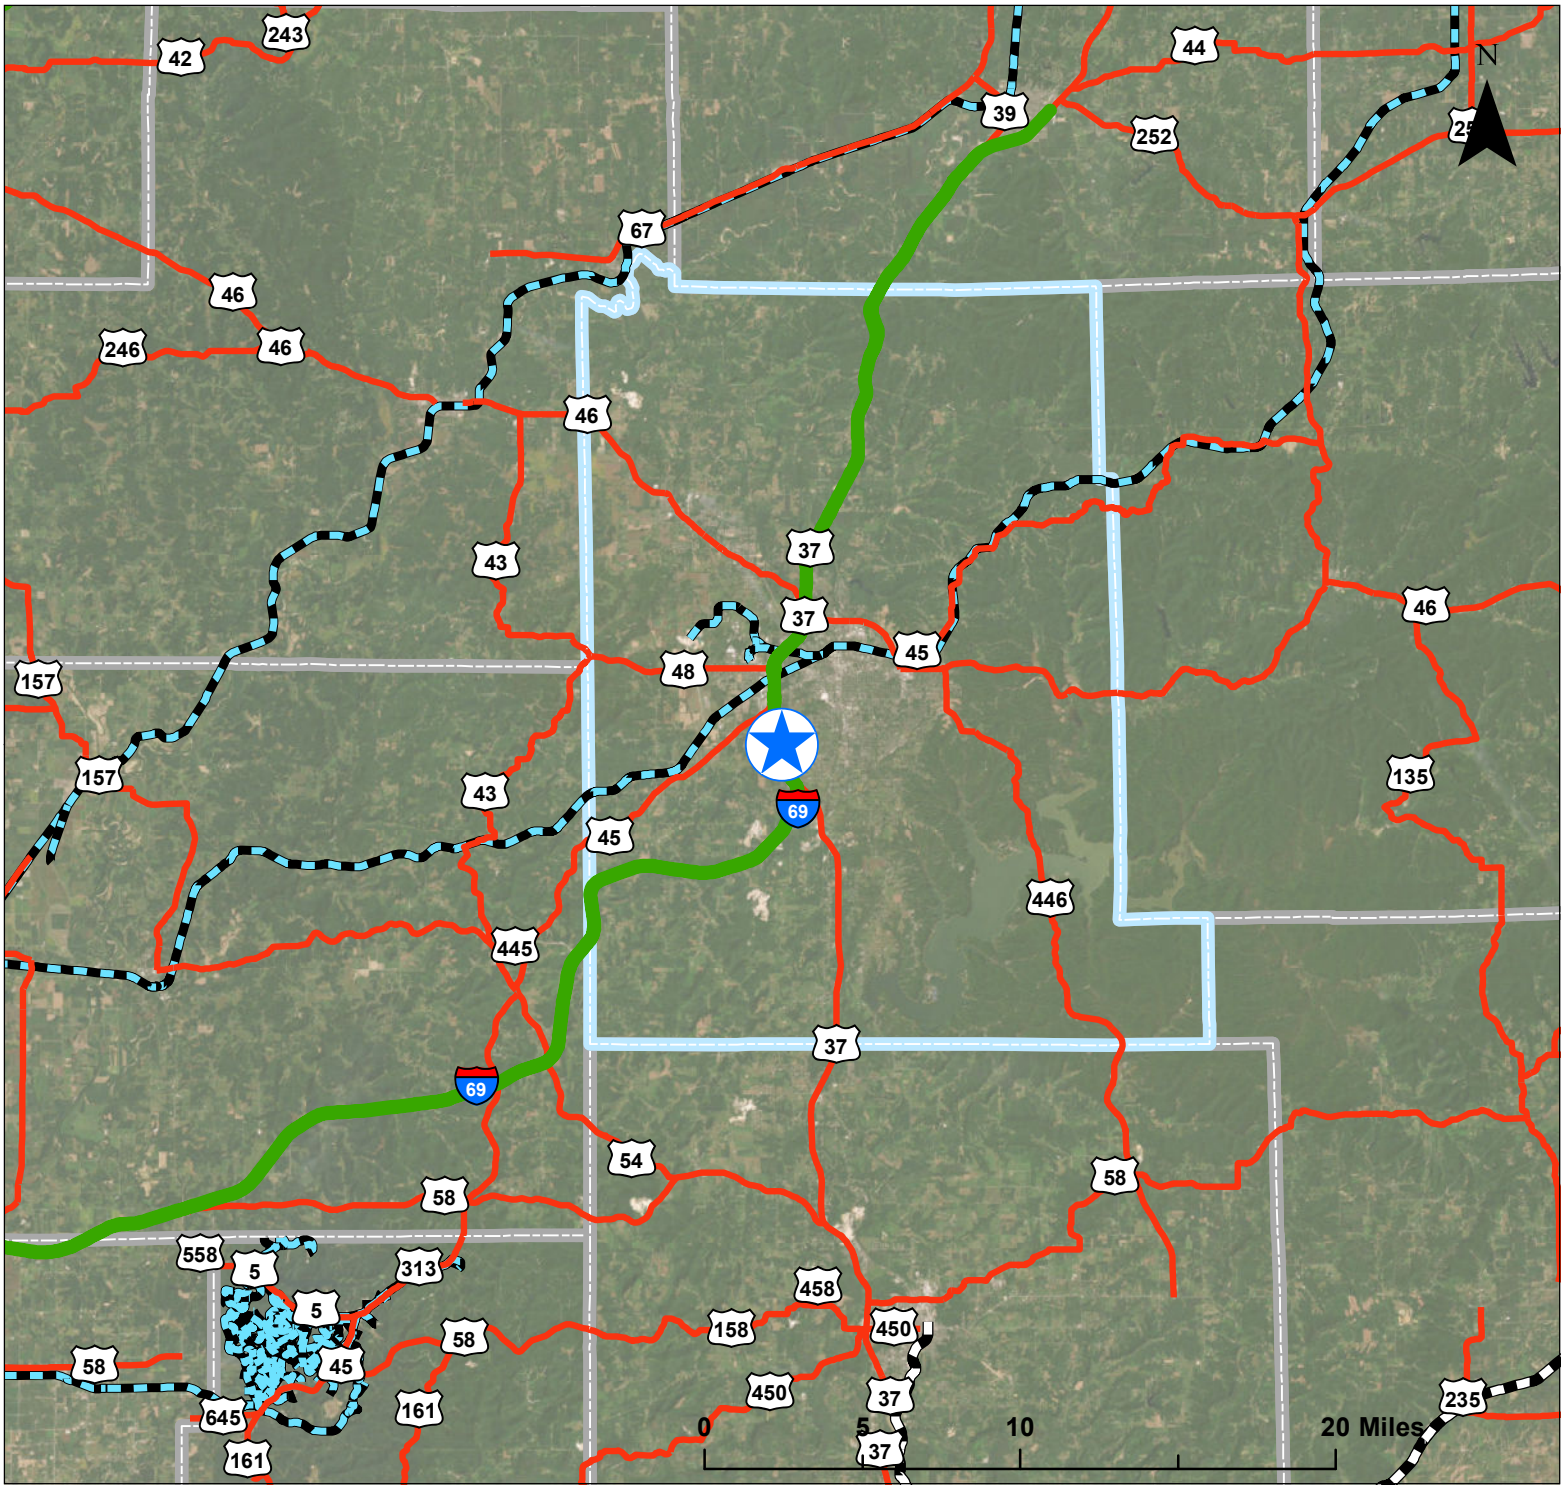

SITE PRIMARY TRANSPORTATION ASSETS

- Site Point
- Interstate
- U.S. Highway
- Shortline
- Class I Railroad
- Monroe County
- County


SSI Phase II sponsored by: DUKE ENERGY

SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Monroe County, Indiana

Site ID: 18105-001 (179.4 acres)

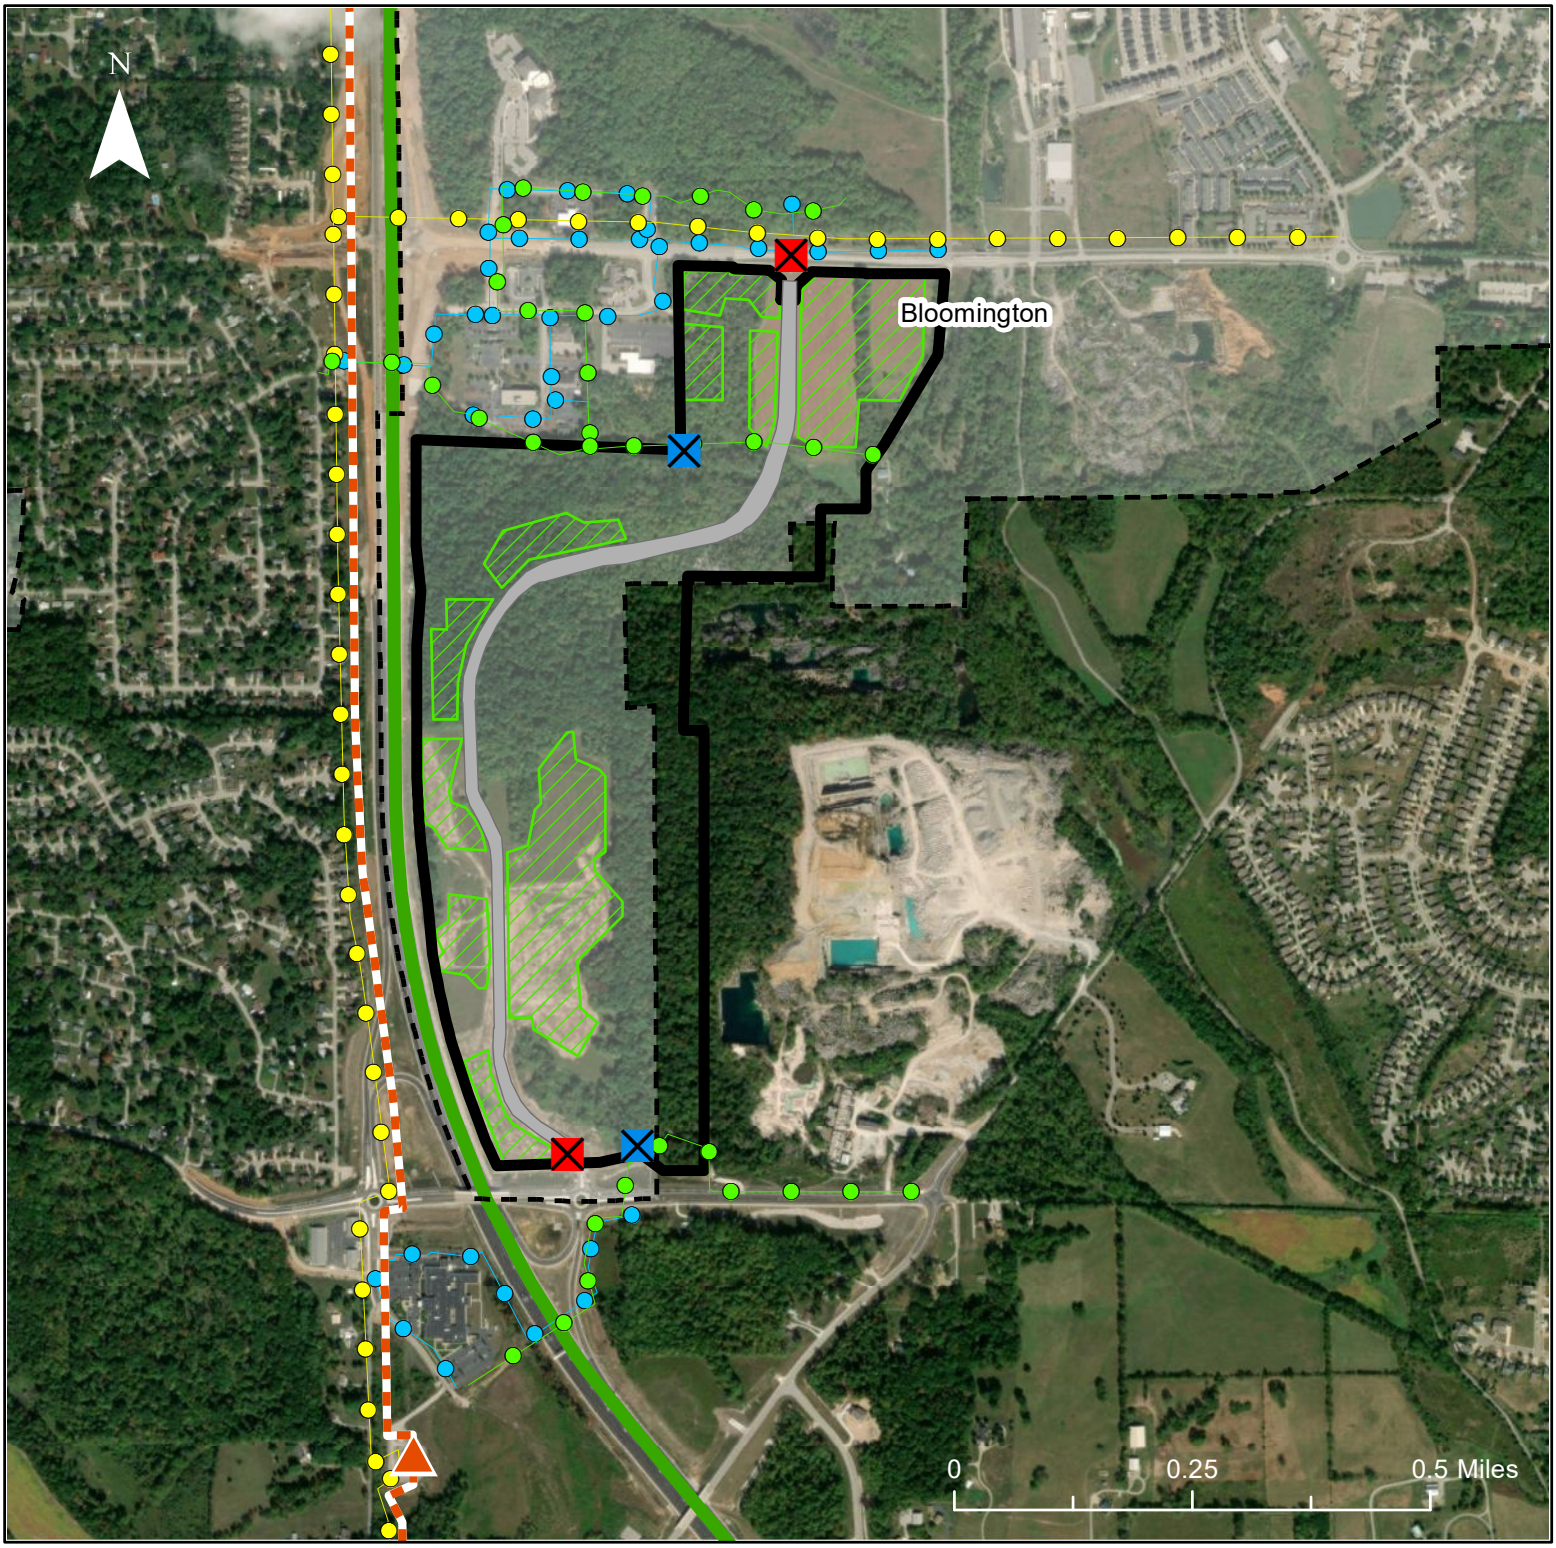

Legend

Access Point

Utility Type

- Electric, Gas
- Water, Sewer
- Electric Substation
- Electric Transmission
- Sewer
- Natural Gas
- Water
- Interstate
- Site Boundary
- Buildable Area
- Municipal Limits

ENERGY INFRASTRUCTURE/UTILITY ACCESS

with Utility Access Point

SSI Phase II sponsored by: DUKE ENERGY


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Monroe County, Indiana

Site ID: 18105-001 (179.4 acres)

BLOOMINGTON BEDC ECONOMIC DEVELOPMENT

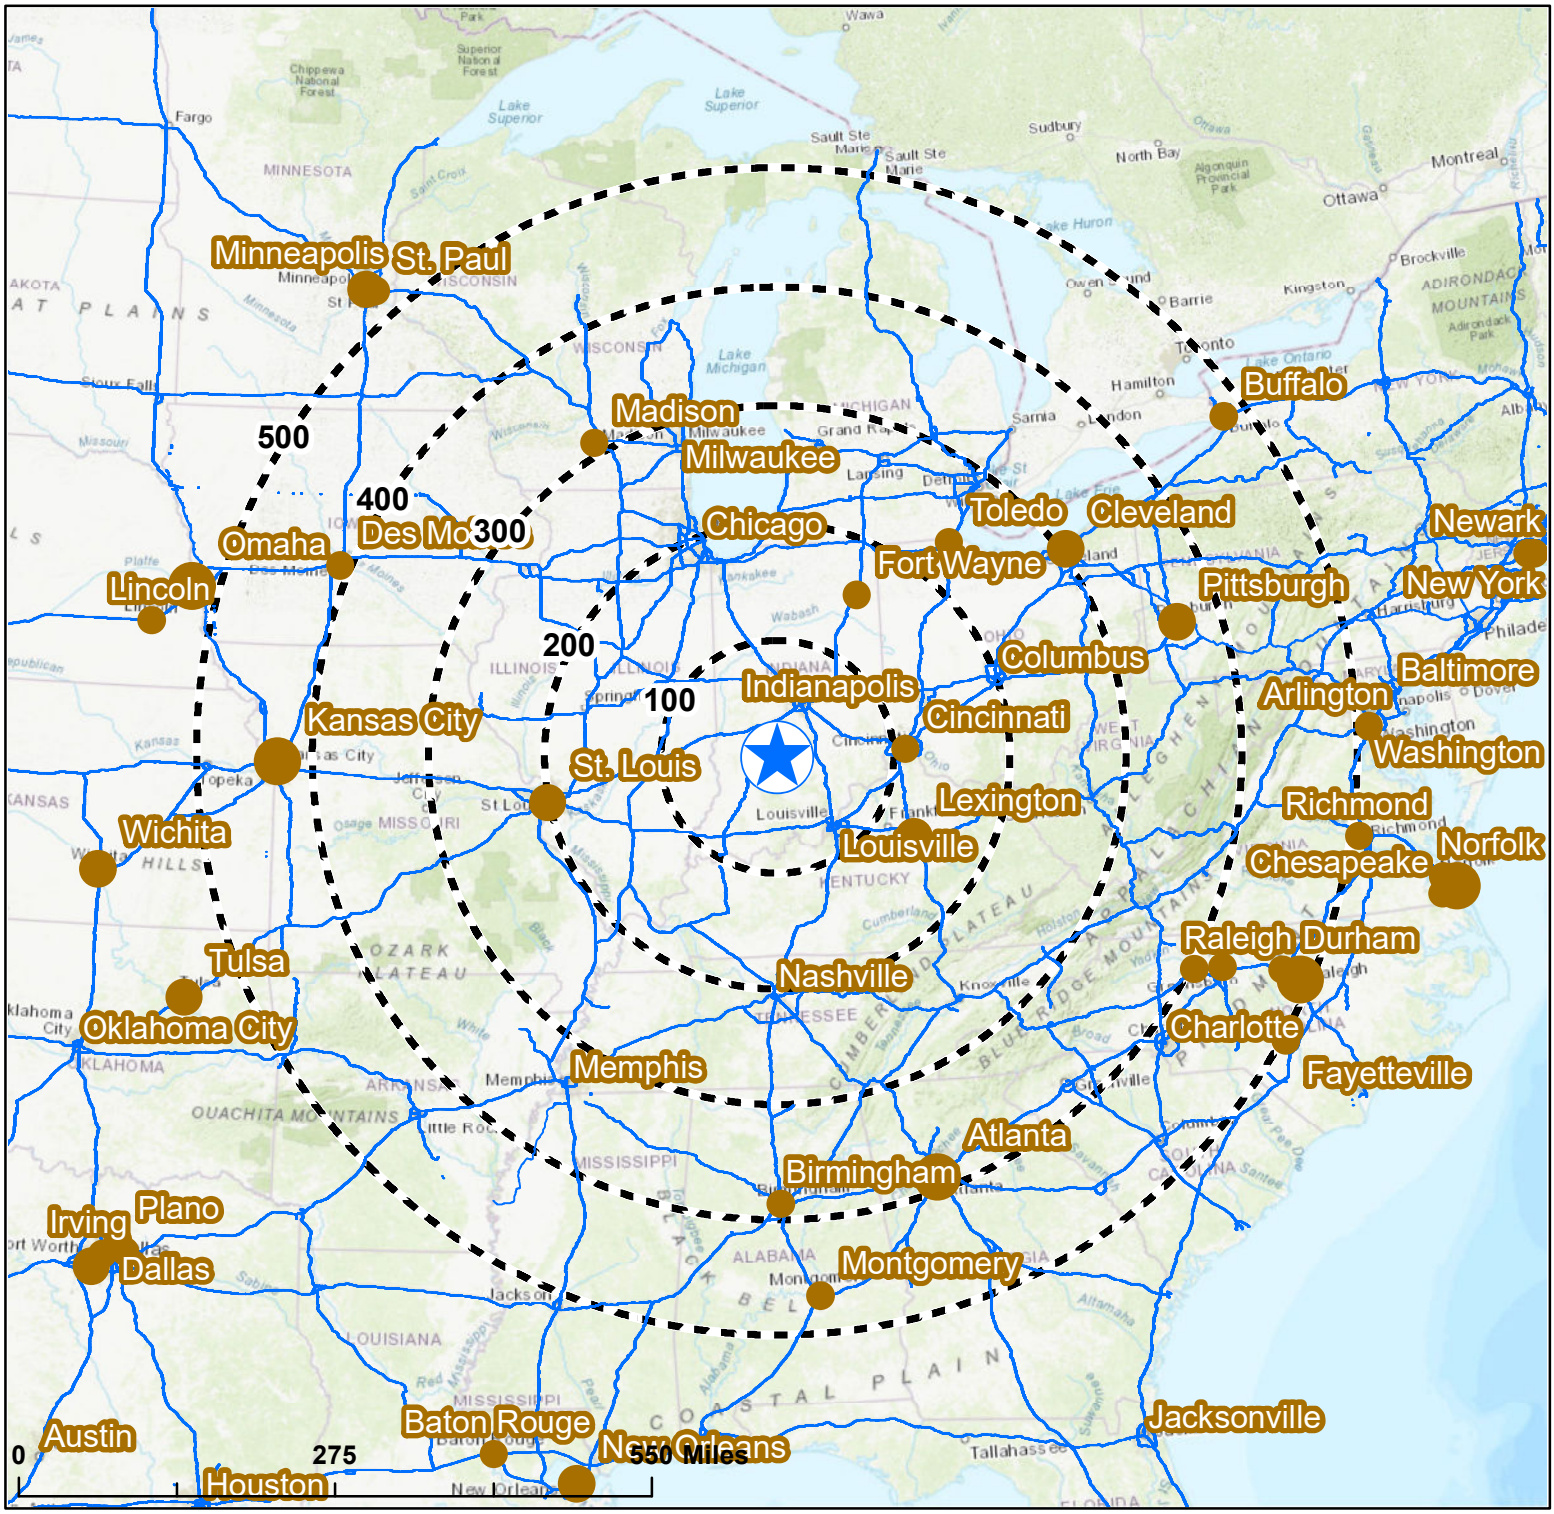

Legend

- Site Point
- Interstate
- Distance in Miles

Major Markets

City Population

- 0 - 99999
- 100000 - 199999
- 200000 - 299999
- 300000 - 399999
- 400000 - 499999

TRAVEL DISTANCE

Major Markets

SSI Phase II sponsored by: DUKE ENERGY


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Monroe County, Indiana

Site ID: 18105-001 (179.4 acres)

BLOOMINGTON BEDC ECONOMIC DEVELOPMENT

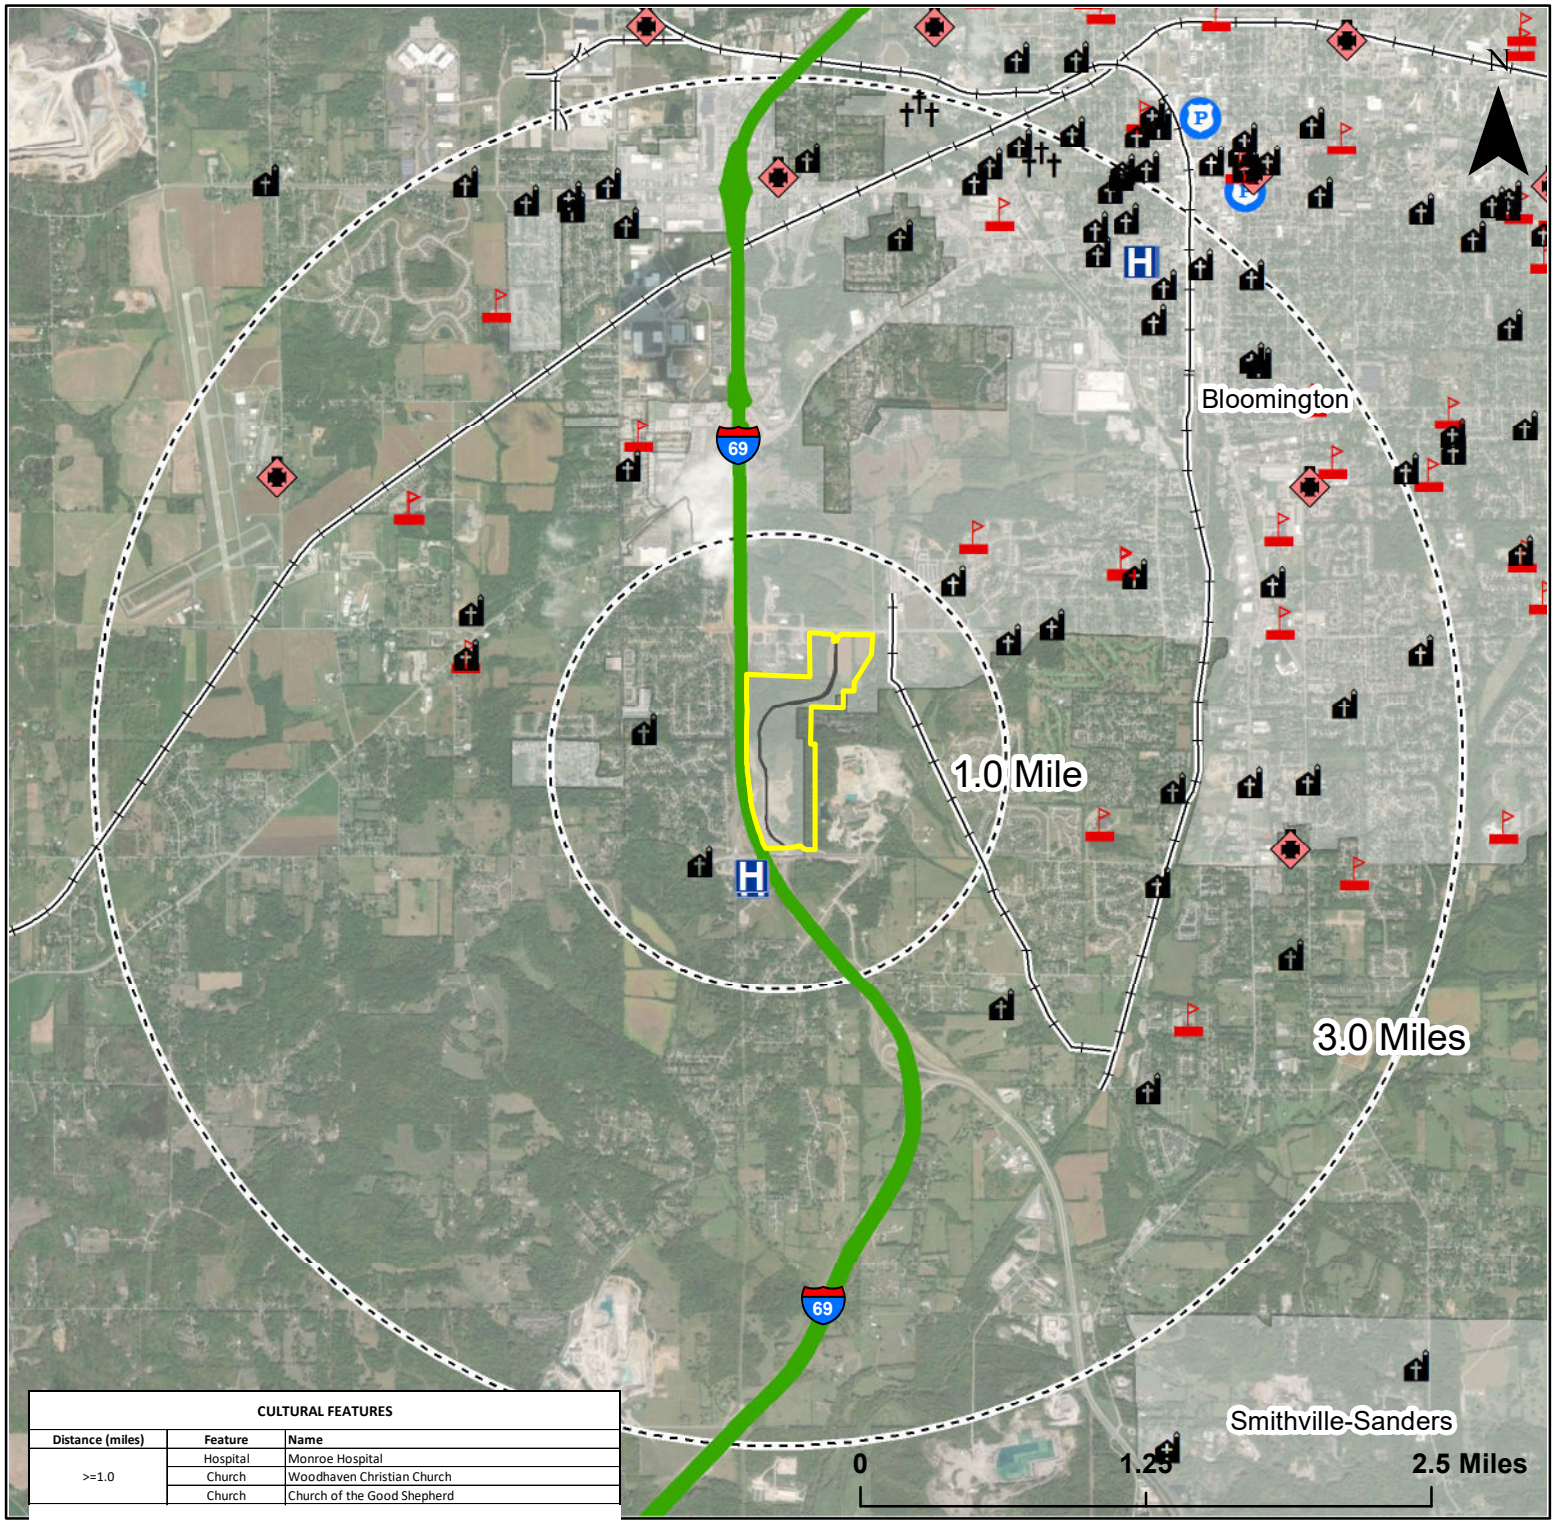

CULTURAL FEATURES

Distance (miles)	Feature	Name
>=1.0	Hospital	Monroe Hospital
	Church	Woodhaven Christian Church
	Church	Church of the Good Shepherd

Legend

- Site Boundary
- Interstate
- Distance in miles
- Municipal Limits
- Fullerton Pike Tapp Rd. Connection
- Police Station
- Fire Rescue/EMS
- Hospital
- School
- Cemetery
- Church

CULTURAL FEATURES

within 1.0 and 3.0 Miles of Site


SSI Phase II sponsored by: DUKE ENERGY

SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Monroe County, Indiana

Site ID: 18105-001 (179.4 acres)

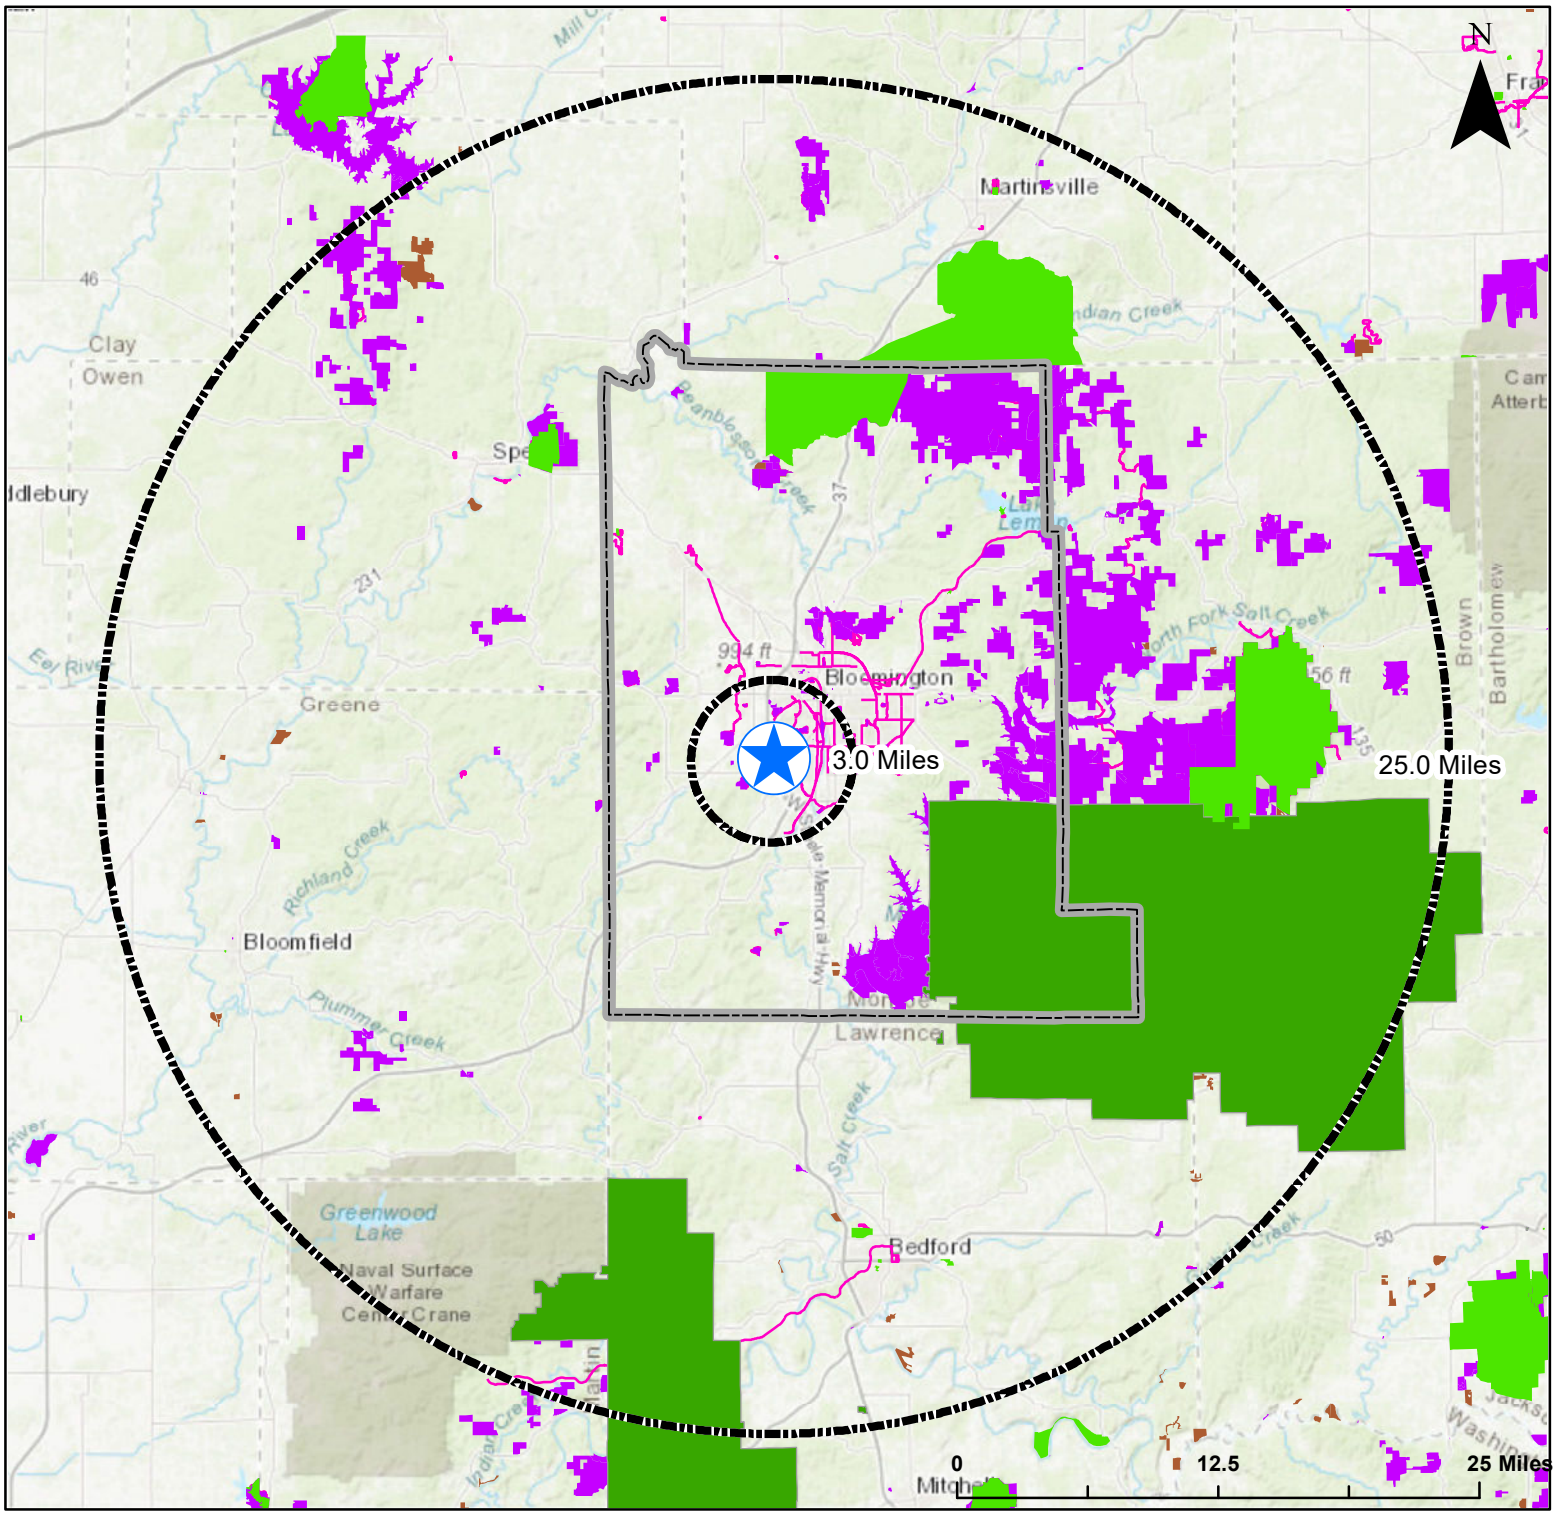

Legend

- Site Point
- IDNR Trails
- Monroe County
- Local/State Parks
- National Forests
- INDR Managed Lands
- Conservation Easements
- Distance In Miles

FEDERAL, STATE, AND LOCAL PARKS AND PROTECTED AREAS

within 3.0 and 25.0 Miles of Site

SSI Phase II sponsored by: Duke Energy


SSI Phase II conducted by: Leotta Location + Design

SSI Phase II: Preliminary Due Diligence

Monroe County, Indiana

Site ID: 18105-001 (179.4 acres)

BLOOMINGTON BEDC ECONOMIC DEVELOPMENT

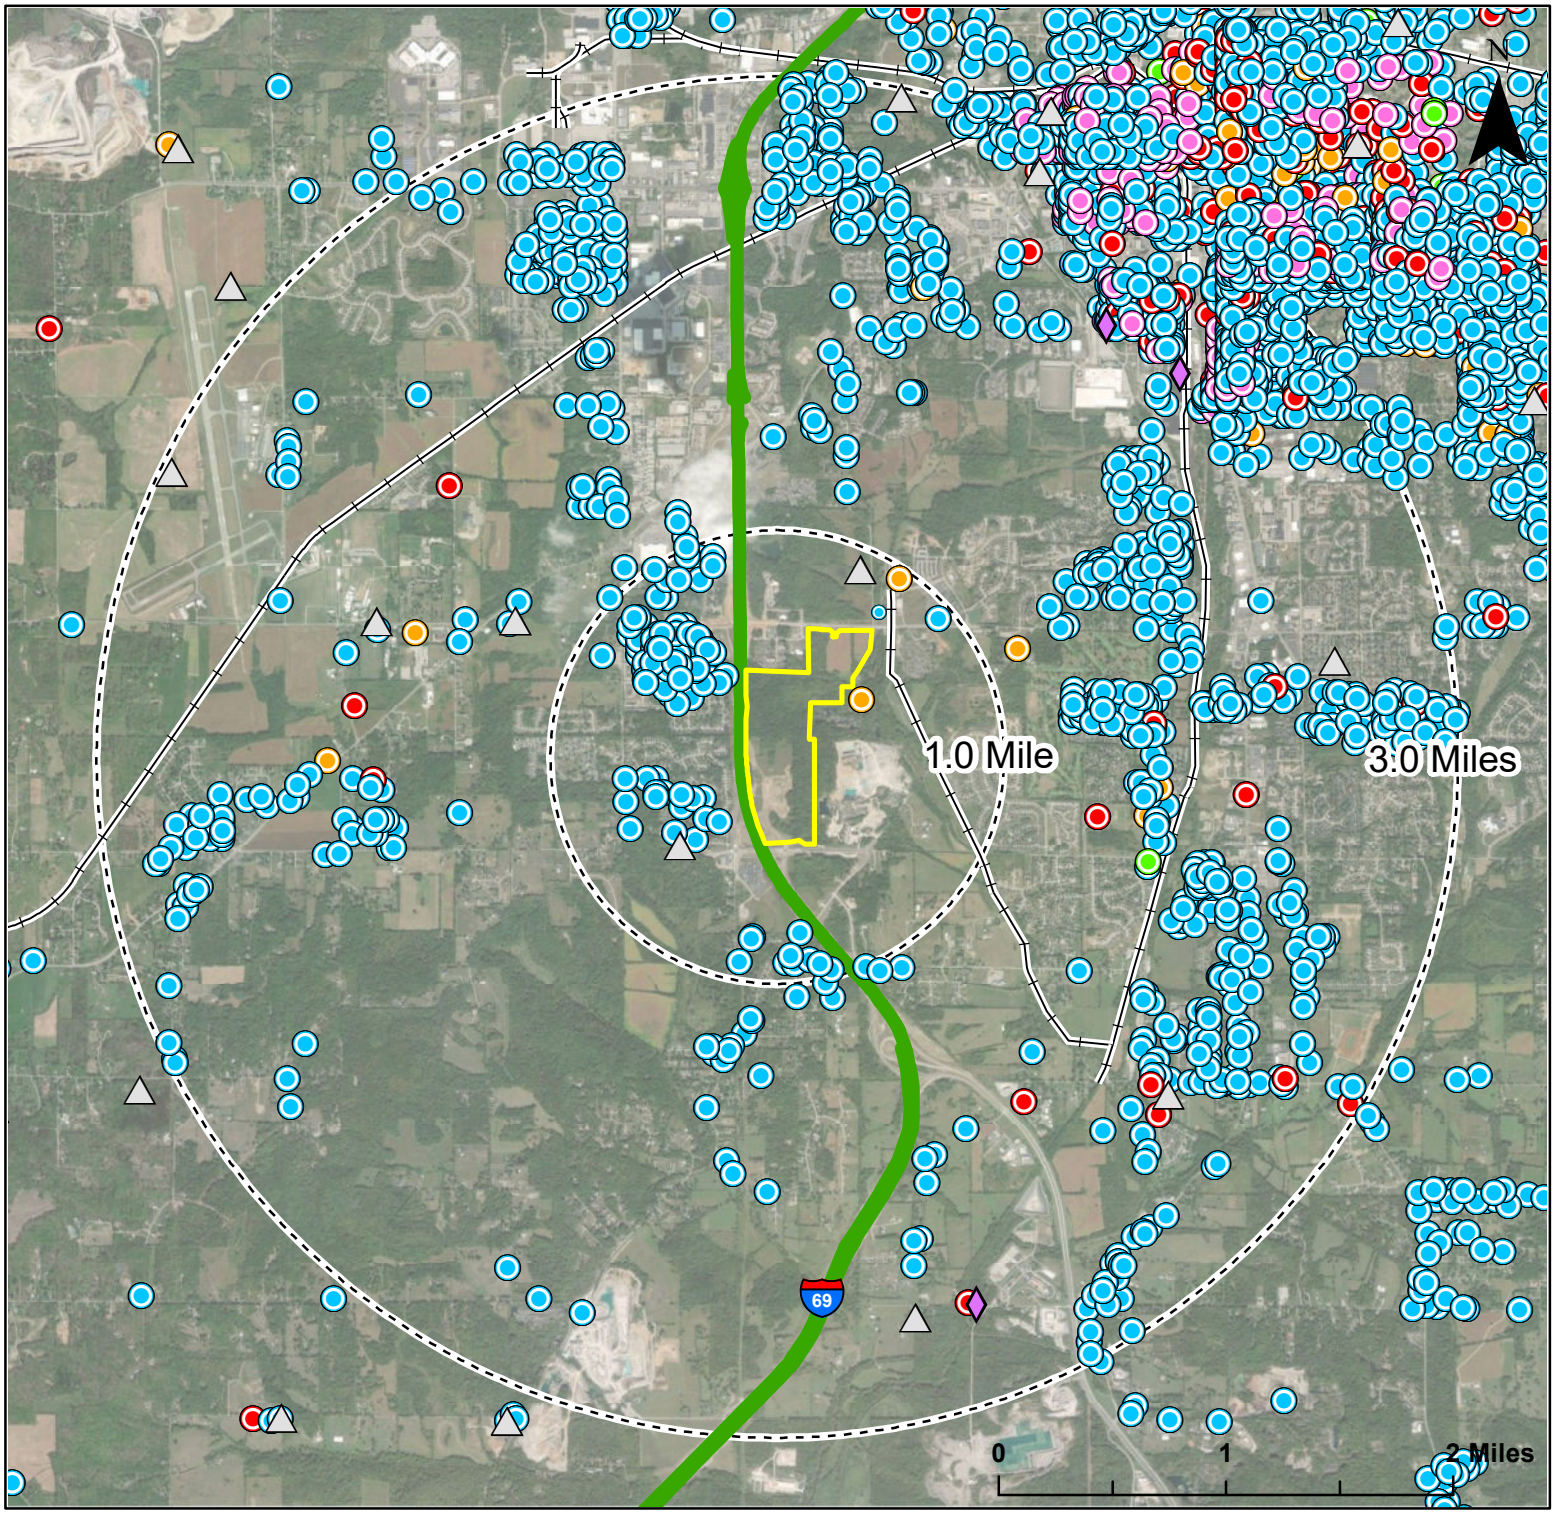

Historic Bridge

Cemetery

Historic Sites and Structures

Demolished

Non-Contributing

Contributing

Notable

Outstanding

Site Boundary

Interstate

Rail

Distance in miles

HISTORIC RESOURCES

within 1.0 and 3.0 Miles of Site

SSI Phase II sponsored by: DUKE ENERGY

SSI Phase II conducted by: LEOTTA LOCATION + DESIGN