Study conducted for:

Study funded by:



FINDINGS REPORT

SSI PHASE II:

PRELIMINARY DUE DILIGENCE

STRATEGIC SITES INVENTORY (SSI) PROGRAM

August 4, 2022

Site ID: 18165-027

Vermillion County, IN

Study conducted by:

Findings Report

TABLE OF CONTENTS

Section Page

Introduction 2

Site Description 4

Geographic Location 5

Current Ownership 5

Findings Summary 6

Condition 6

Size and Configuration 6
Elevation/Topography 6
Land Cover 8
Hydrography and Flood Risk 11
Potential Wetlands 11
Soils 12
Sinkholes 13
Zoning and Land Use 13
Threatened and Endangered Species 14
Legacy Environmental Concerns 16

Connection 18

Transportation Assets 18
Access 18
Truck Routes 18
Railroads 18
Airport 19
Seaport 19

Section Page

Utility Infrastructure **19**
Potable Water 19
Sewer/Wastewater 20
Natural Gas 20
Electric 20
Telco/Broadband 20
Major Market Areas **20**

Community **21**
Description of the Economy **22**
Demographics **22**
Employment and the Economy and Income **22**
Population/Workforce **22**
Cultural Features **23**
Schools 23
Churches 23
Cemeteries 23
Group Care Centers 24
Other Cultural Centers 24
Parks and Protected Lands 24
Correctional Facilities 24
Fire Protection/EMS 24
Law Enforcement 24
Hospital/Emergency Care 24
Historical Preservation **24**
Education and Technical Training Assets **27**
Business Climate **28**
Political Climate **29**

Site Competitiveness Metrics Summary 29
Site Competitiveness Report Card 29

Rough Order-of-Magnitude Site Development Cost Summary 31

Site Competitiveness Opinion 31

Subject Site Key Facts .....

Purpose and Use of Study 32
Purpose 32
Use 32
Site Advancement Decision 32
Site Improvement Investment Consideration 33
Site Marketing 33

Warranty 33

Appendices

Reference

Site Maps ..... A
About the Strategic Sites Inventory (SSI) Program ..... B
Site Parcel Ownership C
Vermillion County Comprehensive Plan, VRMP FLUM ..... D
IPaC Trust Resources ..... E
Phase I Environmental Site Assessment, Vermillion Rise Environmental History ..... F
USDA, NRCS SSURGO Soils Report for Drainage Class and Small Commercial Buildings ..... G
EDR Radius Report and Historical Aerial Imagery ..... H
ESRI Business Summary and Vermillion Rise Target Industry & Benchmarking Assessment I
Vermillion Rise Value Proposition ..... J
SHAARD Report, Indiana Code 14-21-1 Relevant Sections, Indiana Archaeology Law Q&A ..... K
Archaeological Surveys L
Vermillion Rise Bat Habitat Map ..... M
Utility Infrastructure Map ..... N

List of Maps (Appendix A)

Site Map
Vicinity Map
Elevation/Slope
Land Cover
Potential Flood Hazard
NWI Potential Wetlands
SSURGO Soils
Site Access
Transportation Infrastructure
Energy Infrastructure/Utility Access
Travel Distance Major Markets
Cultural Features
Federal, State, and Local Parks and Protected Areas
Historic Resources

Vermillion Rise Mega Park

Vermillion County, Indiana

Site ID: 18165-027

SSI QUALIFIED SITE

Size and Location

Site: 1162.7 acres

Buildable Areas:

- North (BA-N) – 175.7 acres
- West (BA-W) – 477.8 acres
- Center (BA-C) – 109.8 acres

Broadway Ave. (future extension)
Newport, IN 47854
Lat. 39.8493 Long. -87.4400

Current Ownership

Newport Chemical Depot Reuse Authority

Highest and Best Use

Heavy Industrial
Light Industrial
General/Heavy Agribusiness


Site GPA


3.3


Legend

- Site Location
- Limited Access
- Major Highway
- Rail
- Site Boundary
- SSI Phase II Study Area
- Buildable Areas
- Vermillion County
- Vermillion County

Vermillion County Vicinity

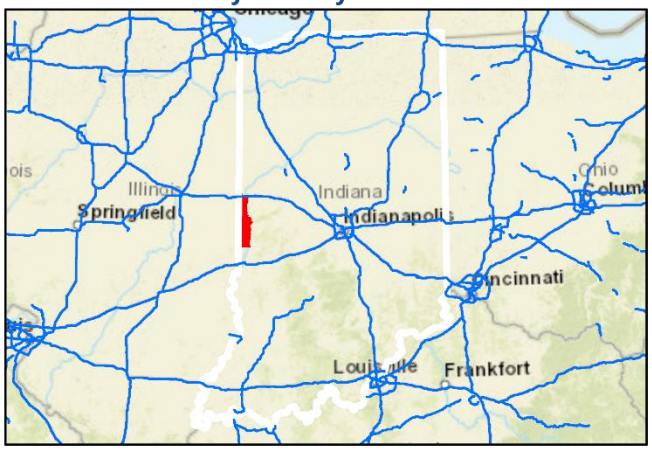

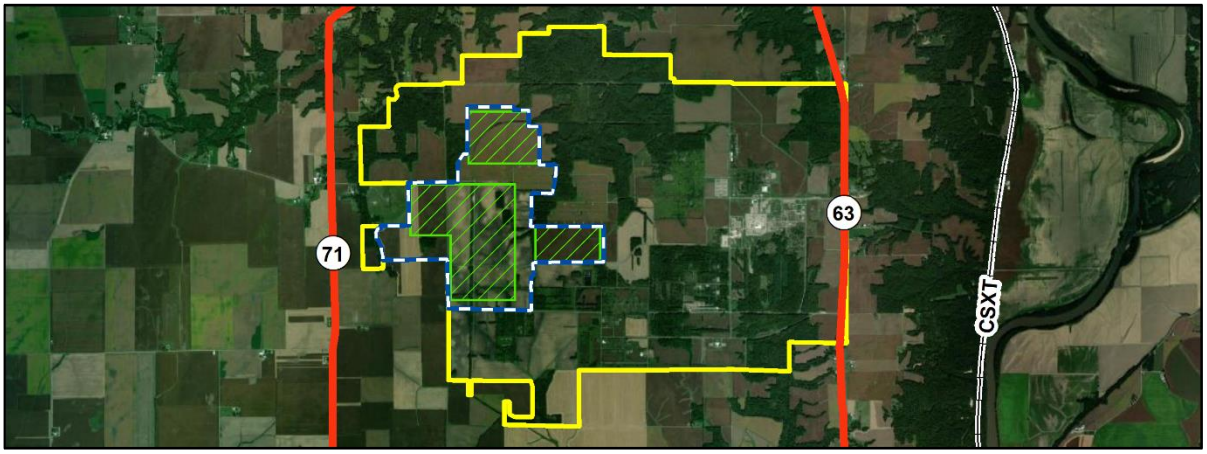

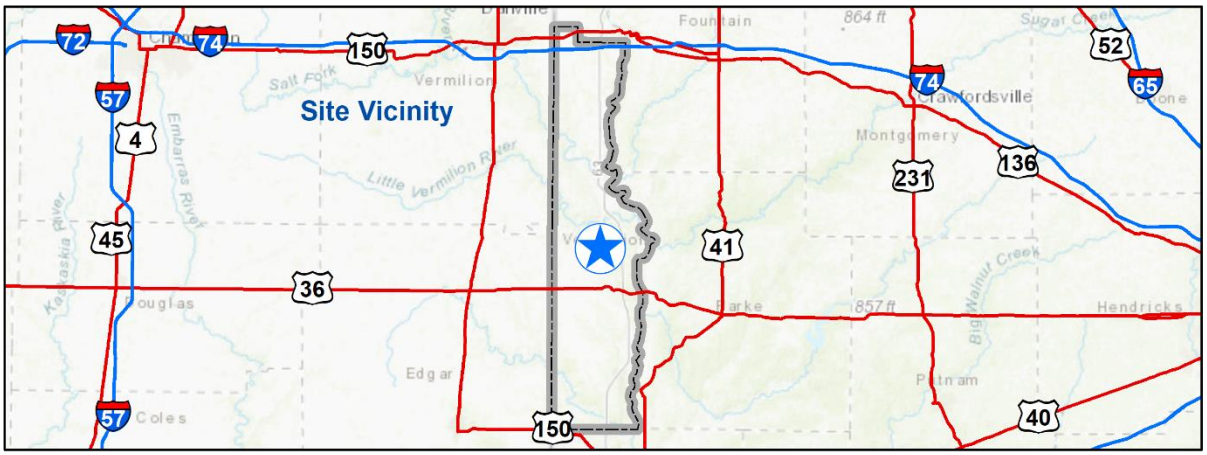


Introduction

This report presents the findings of the Strategic Sites Inventory (SSI) Phase II: Preliminary Due Diligence assessment of a portion of Site ID 18165-027 (referred to as the "Vermillion Rise Mega Park"). The study area of interest consists of 1,162.7 acres within the 7,000-plus-acre greenfield property located near the town of Newport, Indiana. Newport is located in Vermillion County and serves as the county seat. The Vermillion Rise Mega Park was nominated for advancement to SSI Phase II by officials from Vermillion County and Duke Energy. This SSI Phase II study has been funded by Duke Energy, an American electric power and natural gas holding company committed to providing reliable, efficient energy to its served communities. *The subject site satisfies baseline quality criteria, aligns with Vermillion County industry targets, and is deemed competitive to attract high-value business investments in support of sustainable community job growth and economic prosperity.* Report site maps are included as **Appendix A**.

SSI QUALIFIED SITE

The SSI Program is an advance site selection initiative designed to develop an inventory of strategic real estate assets to attract quality job-creating business investments. In 2019, the Indiana Economic Development Corporation (IEDC) initiated the Strategic Sites Inventory (SSI) Program in the State of Indiana with *SSI Phase I: Site Discovery* for all 92 counties with a goal to increase economic development competitiveness at the community level by identifying new, top quality raw land sites ideally suited for industrial and commercial projects. Vermillion County was included in the initial IEDC-funded project and benefitted from the identification of eleven potential high-value sites for mega site and heavy industrial land uses. A subsequent investment by IEDC in 2020 included expanded SSI Phase I site searches to identify light industrial and agribusiness sites, increasing Vermillion County's total of quality SSI-identified sites to twenty-six. A total of 570 sites have been identified within Duke's served territory.

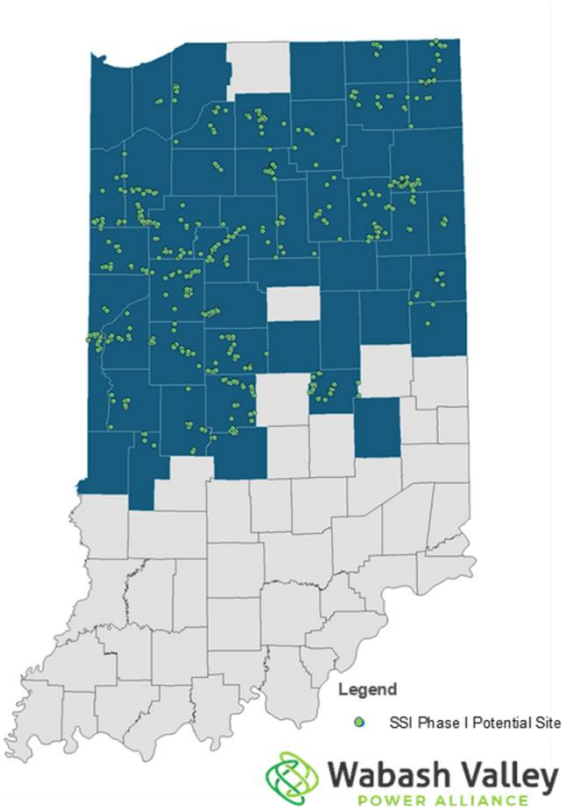

The subject site (Site ID 18165-027) was identified from the initial 2019 IEDC-funded SSI Phase I project for mega site and heavy industrial land uses. The intended study area boundary is comprised of the west-central portion of the Vermillion Rise Mega Park property's entirety. The subject site exhibits necessary competitive characteristics for SSI Phase II: Preliminary Due Diligence nomination. Details about the SSI Program phases are provided in **Appendix B**.

Leotta Location and Design (LL+D) has developed a systematic and effective methodology for screening potential sites for practical development as part of the SSI Phase II process. LL+D's site screening methodology is informed by fifteen-plus years of industrial and commercial site selection experience and economic development consulting in conjunction with demonstrated geospatial technology-based analysis and mapping expertise. LL+D staff and consulting partners include environmental science, civil and geotechnical engineering, landscape architecture, geospatial technologies, and economic devolvement experts who combine disciplines to identify and evaluate sites for industrial and commercial project uses.

The purpose of the SSI Phase II study is to provide a quantitative understanding of the subject site's advantages and challenges in conjunction with a rough order-of-magnitude (ROM) cost estimate to improve site functional use and mitigate development challenges. The SSI Phase II study is a desktop-based preliminary engineering and environmental due diligence exercise performed by discipline-specific experts with experience in industrial and commercial site selection and property development. Study of the subject site's physical and surrounding characteristics, assets, and impediments for development are reviewed in sufficient detail to formulate a defendable opinion on the competitive strength of the property for an economic development use.

The SSI Phase II study is intended to expose any potential "fatal flaws" that indicate significant development incumbrances or grossly compromise site competitiveness. The desktop review relies on an array of engineering, environmental, ecological, and cultural GIS data in conjunction with aerial imagery and available public records to assess current site development advantages and challenges. The SSI Phase II assessment concludes with the formulation of ROM cost estimates for improving site functional use and mitigating any potential development challenges.

LL+D's team of site selection and economic development experts provided an in-depth study of the subject site through an objective measure of physical features and surrounding characteristics and conditions across engineering, environmental, ecological, and cultural concerns. Overall site competitiveness for an economic development land use is made within the context of location requirements for permitting, construction, and operations relevant to the intended site project land use. **The SSI Phase II findings are expressed along three principal site assessment parameters:**

Condition of the site's physical characteristics including assessment of engineering and environmental development advantages and challenges.

Connection to transportation assets, utility infrastructure, and major market areas.

Community support including available workforce, cultural feature impacts, and business climate for economic development.

A description of the subject site and summary of SSI Phase II findings is provided below.

Site Description

The Vermillion Rise Mega Park is an undeveloped (greenfield) property over 7,000 acres in total size located along IN State Road 63 (IN-63) between the cities of Newport and Montezuma, Indiana. The study area for this Phase II report encompasses 1,162.7 acres of the full Vermillion Rise Mega Park. The site was created in 2005 by the Base Realignment and Closure (BRAC) transfer of a former Army Depot to the Newport Chemical Depot Reuse Authority (NeCDRA). The subject site is independently owned by one landowner of record. **Appendix C** provides a summary of site parcel ownership information.



Site ID 18165-027 west view from IN-63

Current study area condition is characterized by primarily pastureland and forested open space. Historically, the Vermillion Rise Mega Park was used as part of the U.S. Army Newport Chemical Depot (NECD), originally known as the Wabash River Ordnance Works, beginning in 1941. The Army used it for various purposes during World War II, including the manufacture of RDX, TNT and heavy water. The mission was later expanded to the manufacture, weaponization and storage of VX nerve agent. In 2005, the Base Realignment and Closure Commission recommended the closure of NECD by 2011. This prompted the development of the Newport Chemical Depot Reuse Authority (NeCDRA), which aimed to redevelop the depot to support job creation, environment quality, fiscal responsibility, and economic viability in Vermillion County.

NeCDRA and its consultant team worked with the local community to create a plan and implementation strategy for the conversion of the depot to a new shovel ready industrial park—the depot has since been transformed into Vermillion Rise Mega Park. The federal government has ensured that the hazardous waste has been cleaned and indemnified subsequent users since the NECD's closure. As of October 2020, the Vermillion Rise Mega Park is home to six companies including General Machine and Saw, Newport Pallet, Gypsum Express, Security Transport, J & R Used Tire Service and Scott Pet Foods. All businesses currently exist outside of the Phase II study area. The intended plan for Vermillion Rise consists of areas for business and technology, agriculture and forestry, commercial uses, natural areas and open space, and bat conservation uses.

The cultural setting is rural with primarily agricultural pastureland and forested open space surrounding the site. Commercial or residential activity near the site present no significant impact. The site is currently bordered by State Road 63 (SR-63) to the east. *Three contiguous "buildable areas" were defined within the confines of the subject site boundary intended to be most advantageous for construction. The study area's buildable areas are approximately 175.7 acres (BA-N), 477.8 acres (BA-W), and 109.8 acres (BA-C) and were defined to avoid wetlands and legal drainage ditches.*

Geographic Location

Located in west central Indiana, Vermillion County provides a rural setting within proximity to a metropolitan area. The county is situated along the state line of Indiana and Illinois between the high-commercial activity I-74 and I-70 corridors with access to major markets throughout both states. The I-70 corridor connects Indianapolis, IN to St. Louis, MO. *The site is situated approximately 25 miles north of Terre Haute, IN; 60 miles west of Indianapolis, IN; 45 miles southeast of Champaign, IL; 130 miles south of Chicago, IL; and 166 miles northeast of St. Louis, MO*. Projects considering the Vermillion Rise Mega Park will benefit from locating in a rural community largely avoiding traffic congestion, cumbersome permitting processes, and higher land costs typical of urbanized areas while being within reach of a metropolitan community strongly embedded in economic growth and prosperity amongst a primary network of connectivity. Access to surrounding labor markets at competitive wage rates is well within reach of the subject site. Workforce in relation the subject site is relatively low.



Site ID 18165-027 Site Vicinity

The subject site is located just outside the municipal boundary of the City of Newport, which has a 2020 estimated population of 309. Newport serves as the county seat for Vermillion County, which has an estimated population of 15,341. *More than 225,721 total residential population live within a 45-minute drive of the site. Approximately 12,987 businesses employing 172,860 people are located within the same 60-minute travel time*. Construction, manufacturing, and professional, scientific, & technical services account for 16.1% of businesses employing 26.9% of total workforce within a 60-minute drive of the site. A site vicinity map is provided in **Appendix A**.

Current Ownership

The subject site is reported by Vermillion County officials to have a single owner. *The current owner of record is Newport Chemical Depot Reuse Authority.* Newport Chemical Depot Reuse Authority is actively promoting the site for businesses to locate. A "Site Parcel Configuration" map is included in **Appendix A**.

Findings Summary

The findings from the SSI Phase II study are summarized below. A discussion of key site development considerations is provided within the context of overall site physical **condition**, **connection** to infrastructure, and **community** support. LL+D's site competitiveness assessment across these key site development parameters are presented below.

Condition

Site conditions are defined as the physical characteristics of the subject property including geometric configuration, surface features, engineering, ecological and environmental concerns, and land use compatibility. *Overall, conditions for the study area are mostly favorable for development for the site's highest and best use as an economic development real estate asset*.


Size and Configuration of the subject site is sufficient in both acreage and configuration to support a Heavy Industrial, Light Industrial, or Heavy/General Agribusiness operation. *Total site area is approximately 1162.7 acres, measuring approximately 10,645 feet (2.0 Miles) across an east-west axis at its widest point and approximately 9,460 feet (1.8 Miles) across a north-south axis*. The site is geometrically regular in configuration with adequate land between site boundaries providing ample acreage for three contiguous buildable areas. The study area site boundary is located within the Vermillion Rise Mega Park which borders IN-63 to the east. A proposed road, Broadway Avenue, runs through the center of the Vermillion Rise Mega Park connected IN-63 on the east, to IN-71 to the west. The proposed Broadway Avenue runs through the Phase II Study Area granting access to each of the potential areas of development.

Three contiguous buildable areas were identified to optimize facility construction on the site, totaling 175.7 acres (BA-N), 477.8 acres (BA-W), and 109.8 acres (BA-C). These buildable areas were positioned with the operational footprints to avoid wet areas and the Bat Habitat Protection area. The buildable areas occupy the majority of the site and are comprised of a single tract with a single owner. Site access is supported by multiple potential ingress/egress points located on the proposed Broadway Ave. running through the central northern portion of the site's east and western boundaries.


Elevation/Topography presents minor grading challenges to prepare the site for development. *Based on a review of 5-meter cell size, LiDAR-derived digital elevation models (DEM) for the full site extent, a minimum elevation of 610 feet mean sea level (MSL) and maximum elevation of 644 feet MSL is reported. The 2012 DEM indicate an average buildable area elevations of 630.9, 633.3, and 625.1 feet MSL and average slope of 0.7, 0.6, and 0.6 percent* for BA-N, BA-W, and BA-C respectively.

The site slopes generally from the center outward, the center being the highest point on the site. The lowest elevations are found along the eastern and northwestern portions of the site. Average site elevation and topographic variability may present cut-fill opportunities for use of onsite fill for grading/leveling. This is subject to an onsite geotechnical engineering investigation to determine suitability of soil properties for construction. As well, naturally occurring sloping topography may provide

passive areas for site buildable area drainage and stormwater retention. LiDAR and 2-ft contour map provided as **Appendix A**.

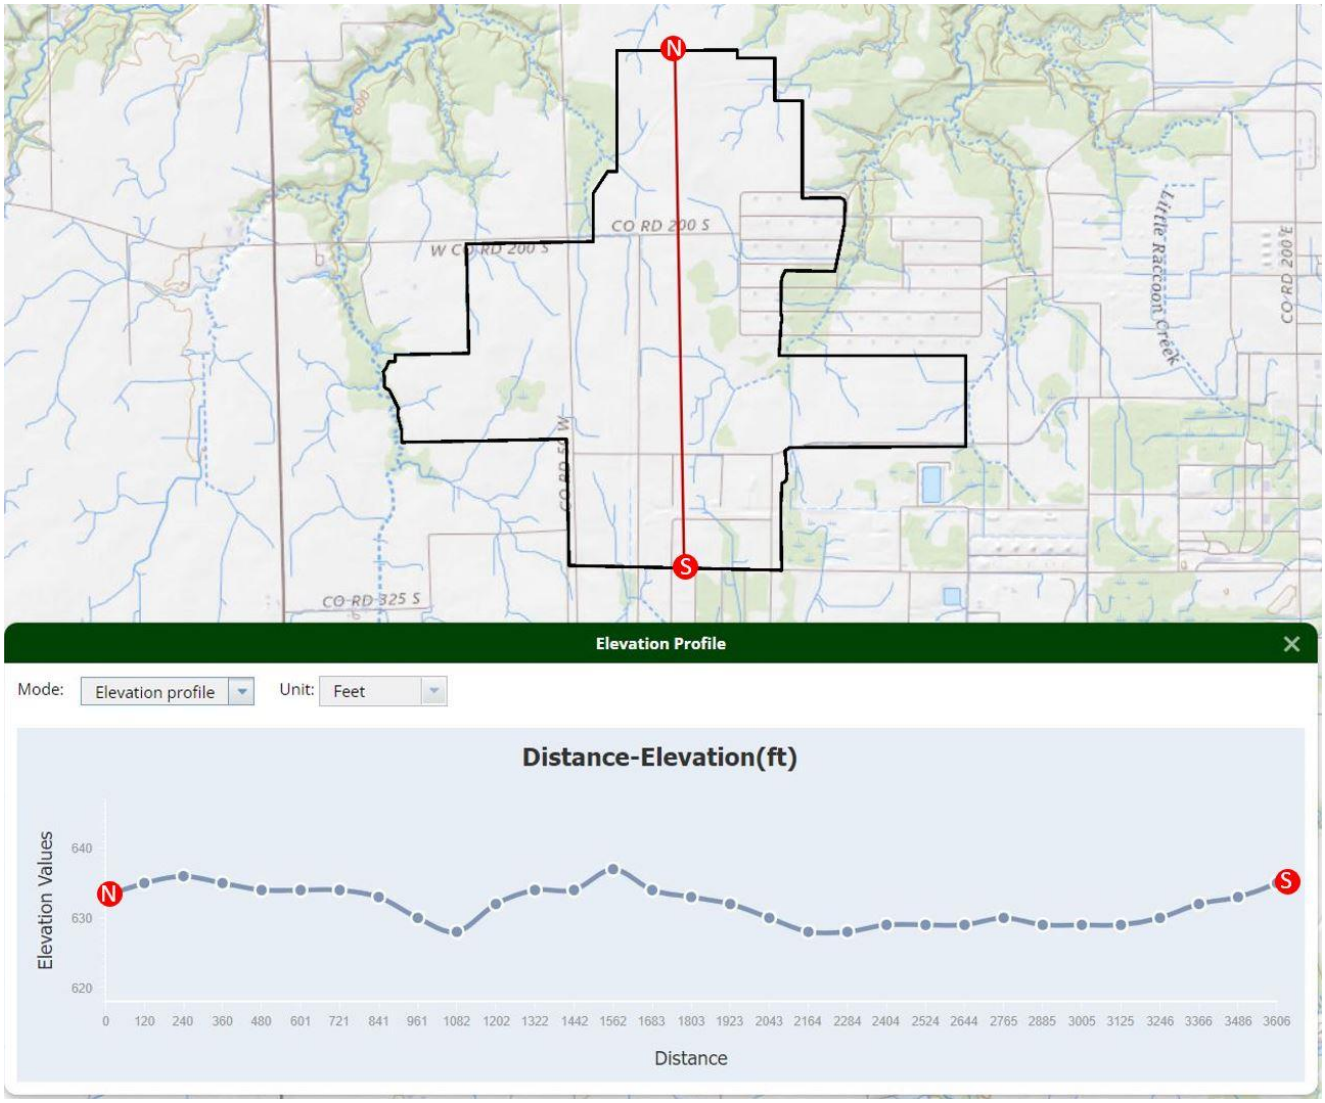

18165-027 Elevation Profile North-South (USGS 3DEP Viewer)

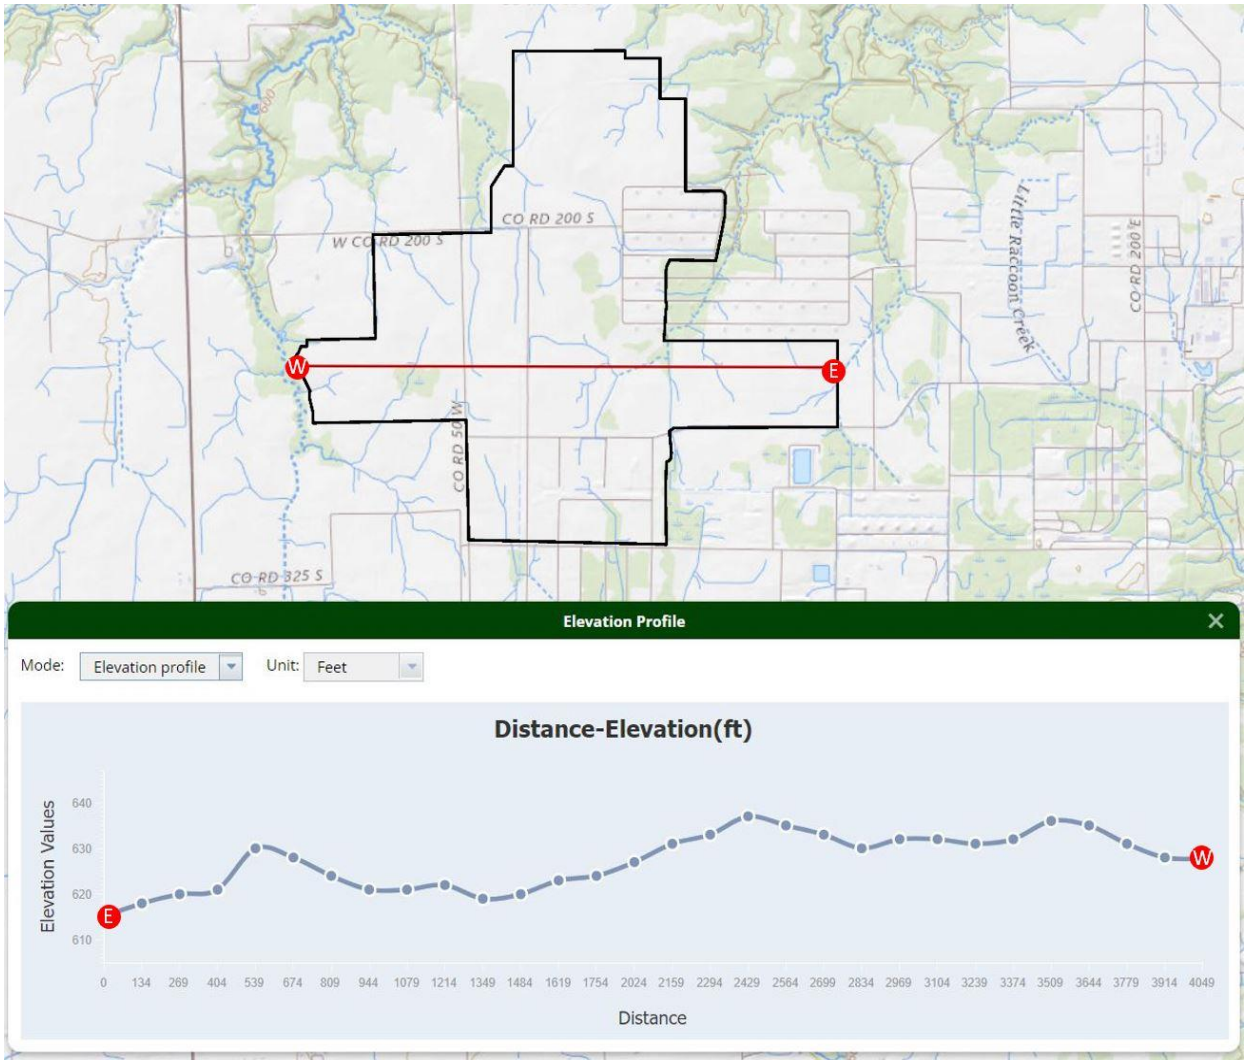

18165-027 Elevation Profile East-West (USGS 3DEP Viewer)


Land Cover assessment is useful for identifying site design constraints and/or potential encumbrances that may be encountered during site development such as extensive clearing and grubbing, drainage concerns, etc. The type of vegetative cover is used in conjunction with soil types, elevation, and hydrography data for interpretation of environmentally sensitive conditions such as wetlands and potential habitat for Threatened and Endangered (T&E) species and other species of concern (discussed later in this report). Beneficially, certain land cover features may reveal commercial value of forested areas or be desirable to incorporate into site design. Features such as densely wooded areas may provide a desirable buffer during construction and/or during facility operations for line of sight and noise control. Further, wetland areas may be integrated into site plans providing an element of design aesthetics.

Two primary informational sources were used to assess land cover characteristics:

1) *Recent high-resolution color aerial imagery* (ESRI/Google Earth 2017). Recent and past aerial imagery provides useful observational data for assessing current land cover conditions as well as any notable changes over time. However, aerial imagery alone cannot be used without additional data sources to provide a more specific delineation of land cover type. For example, densely wooded areas are readily observed from aerial imagery, however, determination of forest composition is largely indeterminate without other remotely-sensed inputs (i.e., color infrared imagery) or ground-based observation.


2) The Multi-Resolution Land Characteristics Consortium (MRLC), National Land Cover Database (NLCD). The National Land Cover Database (NLCD) provides nationwide data on land cover and land cover change at a 30m resolution with a 16-class legend based on a modified Anderson Level II classification system. NLCD 2019 represents the latest evolution of NLCD land cover products focused on providing innovative land cover and land cover change data for the Nation. NLCD 2019 offers 8 integrated epochs of land cover for years 2001, 2004, 2006, 2008, 2011, 2013, 2016, and 2019. Developed classes in these years are directly derived from percent developed impervious surface and include a descriptor label that identifies the type of each impervious surface pixel. The NLCD Land Cover change index combines information from all years of land cover change and provides a simple and comprehensive way to visualize change from all 8 dates of land cover in a single layer.

Based on a review of the GMRLC NLCD dataset, land cover for the site and buildable area consists of the following classified areas (acres, percent cover):

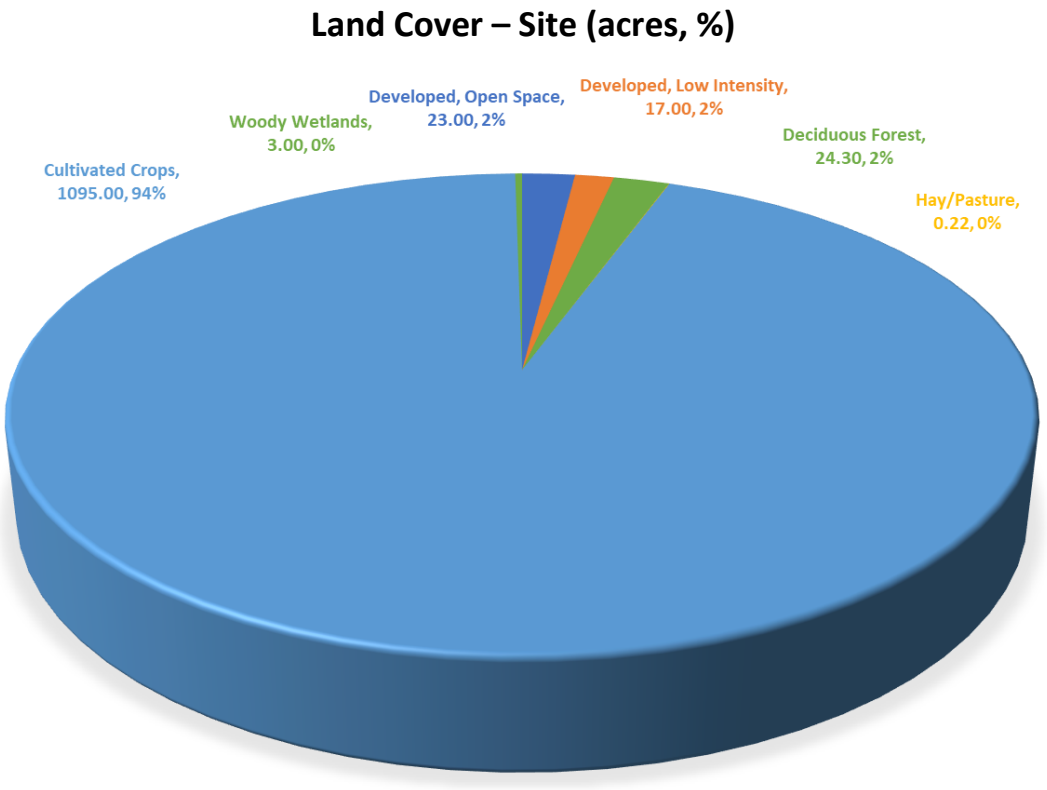


The site buildable areas are predominantly classified as Cultivated Crops.


Land Cover – Buildable Area North (acres, %)

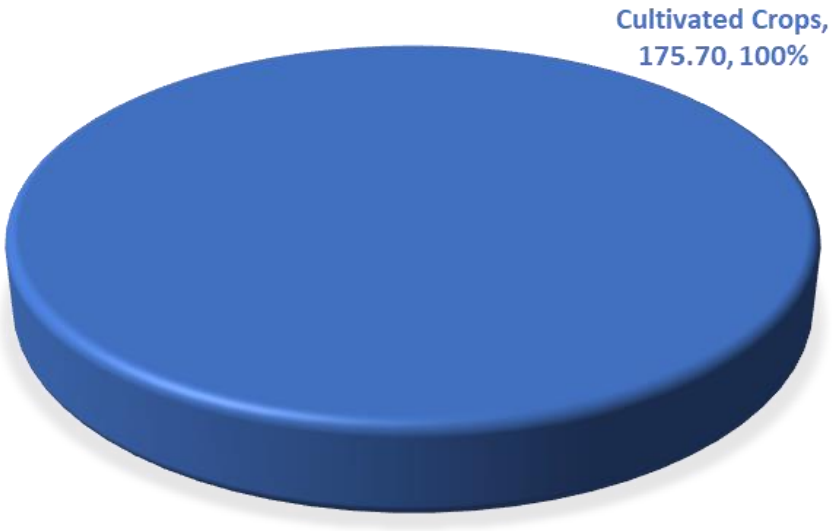

Land Cover – Buildable Area West (acres, %)

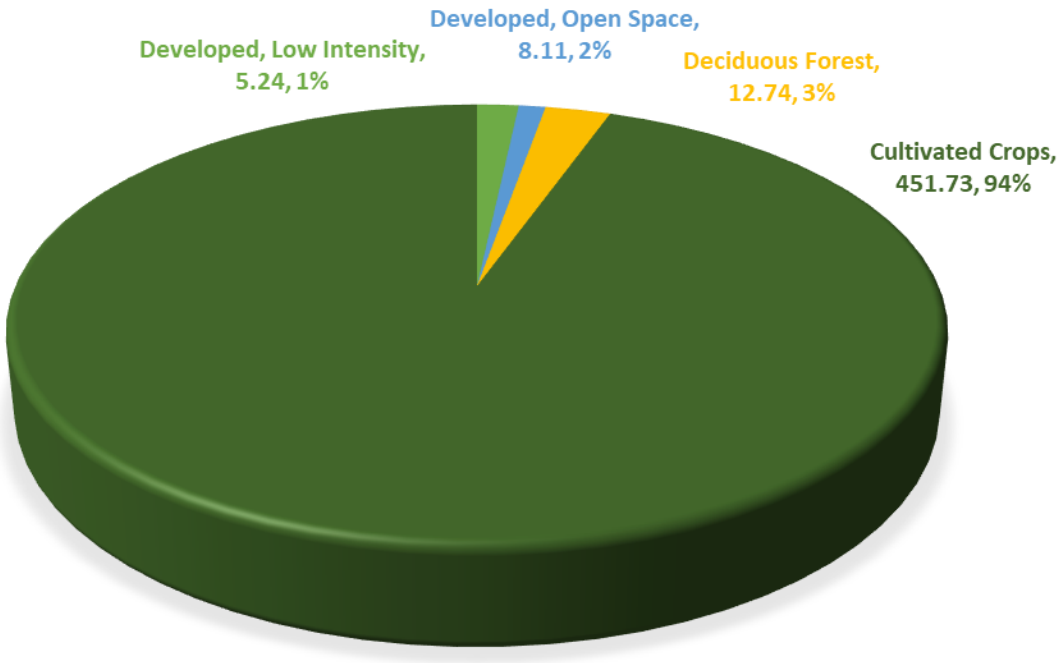

Land Cover – Buildable Area Center (acres, %)

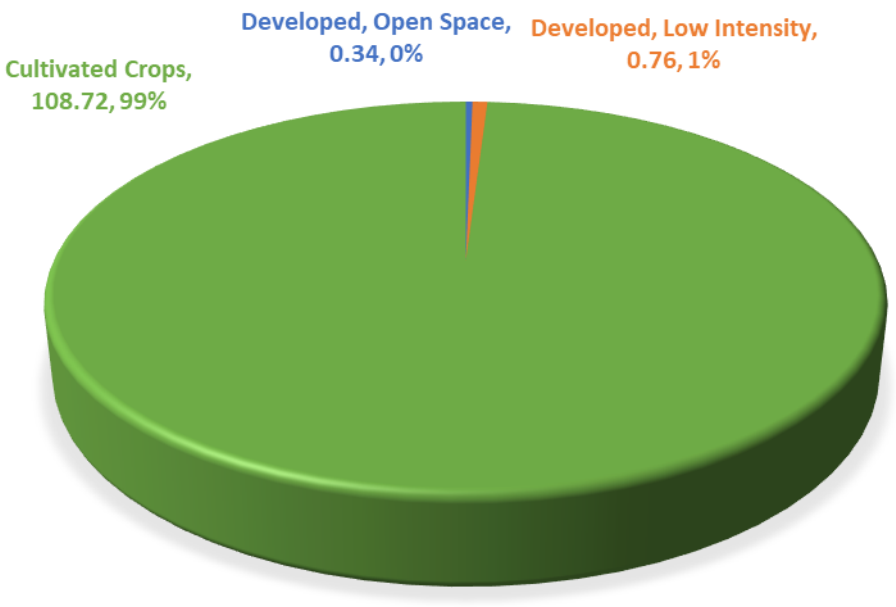

A Land cover map is provided in **Appendix A**.

Hydrography and Flood Risk were evaluated by consulting USGS National Hydrography Dataset (NHD), a geospatial database which identifies stream segments or reaches that make up the nation's surface water drainage system, and FEMA National Flood Hazard Layer (NFHL), a geospatial database that contains current effective flood hazard data. *Based on a review of NHD and NFHL data, the site and buildable area are highly favorable for site development with low flood risk and minimal recorded/observed significant hydrography features. 100% of the study area site is outside the FEMA-designated flood hazard area, designated as Flood Zone X (within 0.2-percent-annual-chance flood or 500-year floodplain).* A hydrography and FEMA flood hazard map is provided in **Appendix A**.

Potential Wetlands are interpolated through observation of multiple data inputs including:

1) USGS National Wetlands Inventory (NWI) – developed for non-404 jurisdictional wetland mapping, so must be understood to have limited accuracy
2) LiDAR-derived digital elevation model (DEM) – topography/elevation
3) USGS NHD – hydrography
4) NRCS SSURGO – soils data provides hydric rating
5) Color-infrared imagery (where available) – for visual indication of wet or inundated areas (consulting differing years to ensure wet areas are not the result of a period flood event)

The NWI data is consulted as the principal indicator of potential wetlands, as the mapping methodology utilizes the above-referenced inputs in addition to other data sources in conjunction with qualified scientific review and quality control of interpolated wetlands delineation and taxonomy. As well, the NWI

data provides a delineation of wetlands types, which is important in the estimation of permitting burden and potential compensatory mitigation costs. The additional data sources are consulted to ensure congruency of information suggestive of potential wetlands occurrence.

From the US EPA Wetland Regulatory Authority fact sheet, wetlands subject to Clean Water Act Section 404 are defined as "areas that are inundated or saturated by surface or ground water at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in saturated soil conditions. Wetlands generally include swamps, marshes, bogs, and similar areas." There are three primary conditions required for surface areas to be considered wetlands: 1) at least periodically, the land supports predominantly hydrophytes, 2) the substrate is predominantly undrained hydric soil, and 3) the substrate is saturated with water or covered by shallow water at some time during the growing season of each year. As determined by the U.S. Army Corps of Engineers, the federal agency responsible for enforcing federal laws protecting wetlands, an area must exhibit all three of the above-referenced conditions in order to be considered a wetland.

The following GIS-based information was consulted for the wetlands desktop assessment:


- **Hydrophytic Vegetation**: Recent and historical aerial imagery and NWI data.
- **Wetland Hydrology**: LiDAR-derived DEM, USGS topo maps, and high-resolution aerial imagery.
- **Hydric Soils**: NRCS Web Soil Survey and SSURGO data.

There are approximately 6.44 acres of potential wetlands reported on the subject site. SSURGO-reported map units of "Pa, Ra, and Sb" are indicated as having a rating of 100% hydric components. These soils encompass 58.3% of the entirety of the site. SSURGO-reported map units of "FcA, ReA, Sh, So, and XeB" are indicated as having a rating of 6% hydric components. These soils encompass 19.0% of the entirety of the site. While no potential wetlands are reported within the buildable area, wetland permitting and mitigation may be required on the subject site. This appears to pose minimal development impediment to the site. NWI potential wetlands map is provided as **Appendix A**.

Soils conditions are assessed to identify potential advantages and/or challenges that could have an impact on site design, construction, and overall use of the site. Soil types are evaluated with respect to drainage and engineering performance for excavations, road construction, and building foundation support. Additionally, soil hydric potential is used in conjunction with wetlands data to increase confidence in potential wetlands interpretation (reported in previous section).

According to the United States Department of Agriculture (USDA), Natural Resource Conservation Service (NRCS) Soil Survey Geographic Database (SSURGO) accessed via the NRCS Web Soil Survey, 43.8% (509.2 acres) of the subject site soils are classified as "Sable silty clay loam, loamy till substratum" with a drainage class of "Poorly drained." Additionally, 17.9% (208.8 acres) and 14.2% (164.6 acres) of the subject site are classified as "Flanagan silt loam, 0 to 2 percent slopes" and "Ragsdale silt loam" with drainage classes of "Somewhat poorly drained" and "Poorly drained." Lastly, 11.7% (136.5 acres) of the subject site are classified as "Reesville silt loam, 0 to 2 percent slopes" with a drainage class of "Somewhat poorly drained." Soil suitability properties for small commercial building construction across 75.7% (881.4 acres) of the subject site are indicated as "Very limited" for shallow (2 feet deep) reinforced-concrete spread footings.

Additionally, 24.3% (282.2 acres) of soils within the site boundary are indicated as "Somewhat limited" for small commercial building construction. Based on the SSURGO data, soil conditions across the majority of the site are not favorable for development. Substantial foundation requirements may not be supported by site soil conditions and must be determined through on-site geotechnical engineering investigation. A SSURGO soils map is provided in **Appendix A**. The USDA, NRCR SSURGO soils reports for drainage class, small commercial buildings, and hydric rating are provided in **Appendix G**.

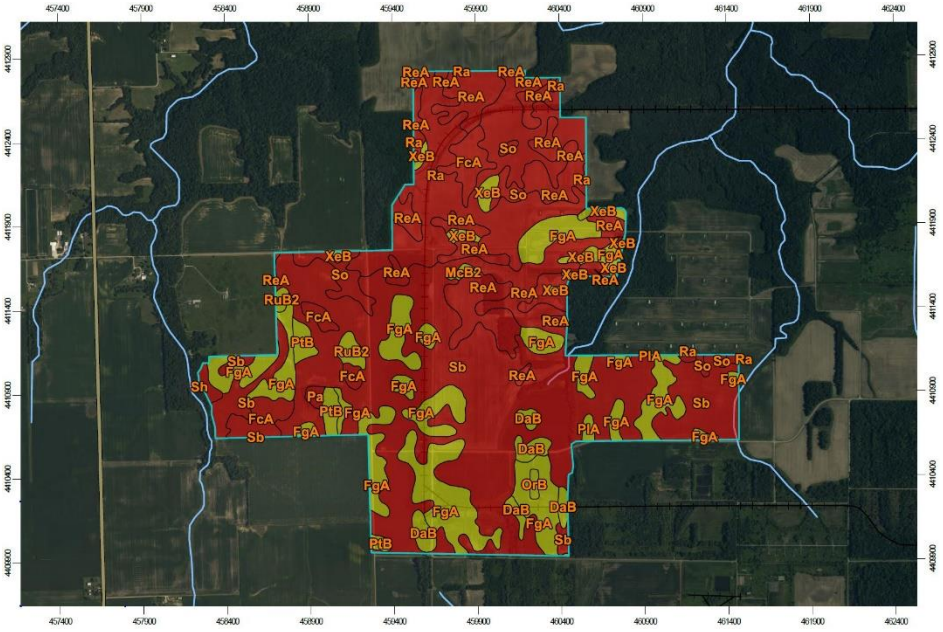

SSURGO Small Commercial Building Rating "Very limited"

Sinkholes are common geological phenomenon occurring throughout the United States. They are only one of many kinds of karst landforms, which include caves, disappearing streams, springs, and underground drainage systems. Karst is a generic term which refers to the characteristic terrain produced by erosional processes associated with the chemical weathering and dissolution of limestone or dolomite.

A review of sinkhole data from the Sinkhole Areas and Sinking-Stream Basins Map developed by the Indiana Geological Survey provides sinkhole areas (SHA) and sinking-stream basins (SSB) associated with rocks of Silurian, Devonian, and Mississippian age in southern Indiana. Some sinkholes may exist outside the delineated areas, and some sinkholes may exist within the areas designated as sinking-stream basins, but such areas are not shown in this map. *The subject site lies entirely outside of the SHA and SSB areas.* The reliability of reported sinkhole occurrences is unknown. Potential site susceptibility to sinkholes must be determined through more thorough professional geological and geotechnical engineering investigation. An Indiana sinkhole map is provided as **Appendix A**.

Zoning and Land Use is administered and governed by Vermillion County. *According to Vermillion Rise Mega Park Zoning Classification Map, the study area currently includes two zoning district:* Industrial and Open Space. *The site's Future Land Use designation, according to the Vermillion Rise Mega Park Land Reuse Map, is zoned for Open Space Outdoor Recreation, the Mega West Site, and the Mega Central Site.* The VRMP Zoning Classification Map and VRMP Land Reuse Map is provided in **Appendix D.**

The apparent current land use of the subject site is derived from the Vermillion County Comprehensive Plan, recent aerial imagery, and Google Street View. *Recent aerial imagery shows current land use to be agricultural/vacant land as evidenced by minimal forested areas and lack of commercial structures*. *The aerial imagery-derived land use observations for the site agree with the Vermillion County Comprehensive Plan.* The Comprehensive Plan for Vermillion County-reported land cover for the buildable area appears to correlate well to discernable land use observed on recent aerial imagery.

Current land use immediately surrounding the subject site to the north is characterized by agricultural/forested land use as observed from recent aerial imagery (ESRI/Google Earth 2018). Similar land uses are observed to the south and west of the study area. Land use to the East is seen as industrial and manufacturing.

There is little to no indication of other land uses over the last sixty-seven years based on a review of historical aerial imagery back to 1949 (provided by EDR Radius report). Ten epochs from 1949 to 2016 were reviewed to determine the sequential occupancy of the subject site. Since 1941, the subject site was developed by the Army to be the Wabash River Ordinance Works for the manufacturing of heavy water, and later for the manufacturing of RDX, TNT, and VX nerve agent. In 2010 the site was deactivated, with full remediation being completed in 2012 with the intention of the site to be used for job creation, environment quality, fiscal responsibility, and economic viability in Vermillion County . Historical aerial imagery is included in the EDR Radius Report provided as **Appendix H**.

Current site land use is ideal to support future development of the site for Industrial land uses. The current future land use designations for surrounding properties will likely not present perceived use compatibility issues with both prospective companies and the public.

Relevant excerpts from the Comprehensive Plan for Vermillion County prescribing zoning and land use polices, standards, and statutory requirements for land development is included in **Appendix D**. The Vermillion County Comprehensive Plan full document should be consulted for detailed requirements pertaining to land use and zoning district designations.

Properly aligning zoning to site use will increase prospective business confidence in site permitting and plan approval timeframes and potentially reduce public hearings expressing development opposition while a prospective business is actively considering the site for a project. Compatibility with surrounding land use is vital to preserving the competitiveness of the site for an economic development use by preventing encroachment of land uses that would create real or perceived risk to prospective business considering the site for development.

Threatened and Endangered Species are defined under the federal Endangered Species Act (ESA) of 1973. The ESA provides a program for the conservation of threatened and endangered (T&E) plants and animals and the habitats in which they are found. The lead federal agencies for implementing ESA are the U.S. Fish and Wildlife Service (USFWS) and the U.S. National Oceanic and Atmospheric Administration (NOAA) Fisheries Service. The USFWS maintains a worldwide list of endangered species. Species include birds, insects, fish, reptiles, mammals, crustaceans, flowers, grasses, and trees.

The ESA defines an *endangered species* as "any species which is in danger of extinction throughout all or a significant portion of its range." Endangered species are automatically protected by prohibitions of several types of "take," including harming, harassing, collecting, or killing, under Section 9 of the ESA. There are some limited exceptions to these rules listed in Section 10 of the ESA. The ESA defines a *threatened species* as "any species which is likely to become an endangered species within the foreseeable future throughout all or a significant portion of its range." Threatened species receive protections through separate regulations issued under Section 4(d) of the ESA.

LL+D staff consulted the USFWS Information for Planning and Consultation (IPaC) online tool (https://ecos.fws.gov/ipac/) to assess potential project effect on listed species (*a plant or animal that receives federal protections under the Endangered Species Act. Species can be protected as endangered or threatened*) and other USFWS trust resources (*includes migratory birds, species listed as threatened and endangered under the Endangered Species Act, interjurisdictional fishes, marine mammals, wetlands, and lands managed by USFWS, such as national wildlife refuges*). The IPaC tool is a project planning tool that streamlines the USFWS environmental review process.

An IPaC Resource List was generated for the subject site. The Resource List is a report that automatically generates a list of species and other resources such as critical habitat (collectively referred to as trust resources) under USFWS jurisdiction that are known or expected to be on or near the project area referenced below. The list may also include trust resources that occur outside of the project area, but that could potentially be directly or indirectly affected by activities in the project area. However, determining the likelihood and extent of effects a project may have on trust resources typically requires gathering additional site-specific (e.g., vegetation/species surveys) and project-specific (e.g., magnitude and timing of proposed activities) information.

The IPaC trust resources report lists critical habitats and species of concern known or suspected to be found in habitats within regional ecology. The IPaC trust resources report found that the following species may potentially be affected by activities in this location:

- **Mammals**:
  - Indiana Bat (*Myotis sodalist*) – Endangered
  - Northern Long-eared Bat (*Myotis septentrionalis*) – Threatened
- **Insects**:
  - Monarch Butterfly (*Danaus plexippus*) – Candidate
- **Critical Habitats**:
  - There are no critical habitats at this location.

The IPaC report also identifies the Migratory Birds Resource List that identifies certain birds protected under the Migratory Bird Treaty Act of 1918 and the Bald and Golden Eagle Protection Act of 1940. Birds listed in the report are birds of particular concern either because they occur on the USFWS Birds of Conservation Concern (BCC) list or warrant special attention within the subject site location. The report does not include a list of every bird found within the site location, nor a guarantee that every bird on this list will be found within the site. The migratory bird list is derived from data provided by the Avian Knowledge Network (AKN). The AKN data is based on a growing collection of survey, banding, and citizen

science datasets and is queried and altered to return a list of those birds reported as occurring in the 10km grid cell(s) that intersect the specified site study area location and have been identified as warranting special attention because they are a BCC species or an eagle (Eagle Protection Act requirements may apply) in that area.

The IPaC Migratory Birds Resource List (MBRL) provides a "Probability of Presence" summary indicating best understanding of when birds of concern are most likely to be present in the site area. *While there is no immediate known impact to site development, the MBRL should be further reviewed within the context of environmental permitting requirements by a qualified environmental/ecological consultant, as temporal migratory bird presence may affect the timing of certain construction-related activities on the subject site*. The IPaC trust resources and FNAI Biodiversity Matrix reports are provided in **Appendix E**.


Legacy Environmental Concerns consist of historical activities and events both on the subject site and on nearby tracts where harmful contaminants were released into soil, surface water, and groundwater. If not properly remediated under state and federal regulatory requirements by qualified environmental consultants/contractors, historical contamination liabilities may be inherited through chain of title even if the contamination originated offsite, particularly with migration through groundwater transport. The historical environmental event implication for site development depends on many factors including the type, extent, concentration, complexity, physical setting and surface/subsurface conditions, and time since the event, which may or may not pose a risk to prospective investors on site development.

A cursory review of the subject site and surrounding properties was conducted to identify any potential legacy environmental concerns. Informational resources consulted for this review include:

- EDR Radius Report;
- Recent and historical aerial imagery review;
- US Environmental Protection Agency's (EPA) Enforcement and Compliance History Online (ECHO) database (EDR Radius Report limits ECHO database search to the target property); and
- Information provided through interviews with local political officials, economic development representatives, and landowners (where available)

The EDR Radius Report searches environmental databases for permitted facilities, events, and other potential concerns occurring on the subject site and up to 1.0 mile of the site boundary. EDR use statement: "*A search of available environmental records was conducted by Environmental Data Resources, Inc (EDR). The report was designed to assist parties seeking to meet the search requirements of EPA's Standards and Practices for All Appropriate Inquiries (40 CFR Part 312), the ASTM Standard Practice for Environmental Site Assessments (E 1527-13), the ASTM Standard Practice for Environmental Site Assessments for Forestland or Rural Property (E 2247-16), the ASTM Standard Practice for Limited Environmental Due Diligence: Transaction Screen Process (E 1528-14) or custom requirements developed for the evaluation of environmental risk associated with a parcel of real estate*".

Based on the results of the EDR Radius Reports and a cursory review of historical aerial imagery, zero environmental legacy concerns were identified on the subject site. Full facility information is provided in EDR Radius Report is provided as **Appendix H**.

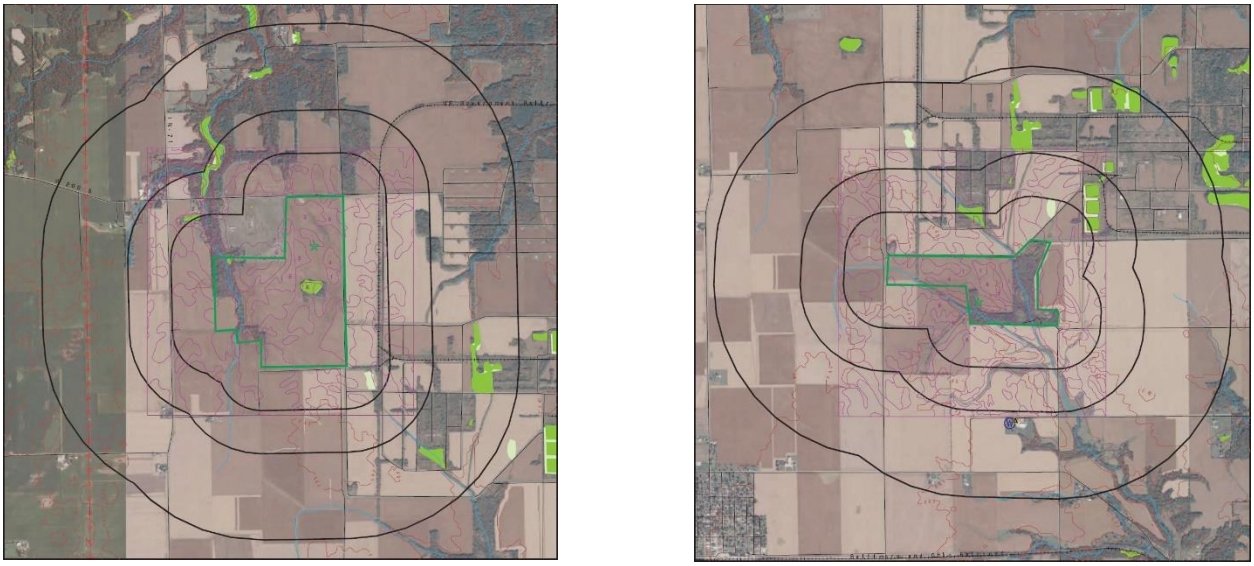

EDR Radius Report Mapped Sites Overview Maps

As the EDR Radius report limits environmental database searches to the subject site and within 1.0 mile of the subject site, the EPA ECHO database was consulted for potential significant environmental concerns within 2.0 miles of the site including active permitted facilities operating under the EPA Clean Water Act, Title V of the Clean Air Act, or the Resource Conservation and Recovery Act (RCRA) for control of solid waste. In limited instances, new air permit applications can be subject to more stringent requirements based on nearby existing permitted facilities' total air emission pollutant volumes and concentrations.

ECHO search results reported a no significant regulatory compliance violations between 1/1/22 – 3/31/22 from the Newport Chemical Depot Reuse Authority. Based on the expanded ECHO search, no environmental legacy concerns are current;y identified on the subject site. The ECHO site search results are provided in **Appendix H**.

As with any desktop research exercise, actual potential environmental concerns may not be fully recognized or understood without conducting an on-site field investigation. The industry standard for real estate environmental review is the Phase I Environmental Site Assessment (ESA). Governed by the ASTM E1527: *Standard Practice for Environmental Site Assessments: Phase I Environmental Site Assessment Process.* The Phase I ESA is designed to investigate property prior to ownership transfer or improvements for use to identify and document any existing or potential contamination that must be addressed or give cause for liability. The Phase I ESA methodology includes more detailed research and review of environmental databases, historical aerial imagery, title research, and on-site field observations of the subject site and immediately surrounding properties. The Phase 1 ESA prepared for the Newport Chemical Depot Reuse Authority on the West and Southwest Parcel Areas is provided in **Appendix F**.

Connection

Site connectivity includes access to key transportation assets and utility infrastructure sufficient for the use intensity of the subject site. Access to available workforce is also measured within the context of the intended economic development project use (e.g., heavy industrial, light industrial, commercial/freight logistics, etc.). *The Vermillion Rise Mega Park is well connected to transportation and utility assets. In conjunction with strong community support, the site is well positioned for competitive response to industrial and agribusiness project opportunities*.

Transportation Assets are in place to serve the logistical needs of commercial/industrial business operations in the area. *Transportation connections to the site include direct access to Indiana state highway frontage and close proximity to a CSXT rail-line with a planned rail corridor to the site.*

Access to the study area is currently available via an unnamed paved road off Broadway Ave/Newport Chemical Depot North Entry, a two-lane entry road into the mega park. A western extension of Broadway Ave to the study area has been proposed and would be necessary for egress/ingress of truck traffic. The proposed extension runs east to west and is approximately 3.5 miles long. A map of the extension has been included in **Appendix N.** From the study area, truck traffic must travel approximately 2.1 miles down the proposed Broadway Ave extension to access Indiana State Road 63 (SR-63), a four-lane major collector highway. Traffic must then travel 19.3 miles on SR-63 to reach Interstate 74 (I-74). An alternative is to travel 30.4 miles south on SR-63 to Interstate 70 (I-70). While all roadways leading to interstate access appear to be in good condition and suitable for truck traffic, the 19.3-mile and 30.4-mile distances are considered a challenge. Site access map is included in **Appendix A**.

Truck Routes accessible by the site include SR-63 for immediate north-south travel and I-74 located approximately 19.3 miles to the north for east-west travel. I-70 is located 30.4 miles south of the site and is alternate route for east-west travel. I-74 can be taken east for 69.1 miles to reach Indianapolis and multiple other truck routes including I-65, I-69, I-70, US-421, and US-31. Another option is to travel 98.3 miles north via SR-63 and US-41 to towards Chicago and the following truck routes: I-55, I-57, I-80, I-90, and I-94. I-70 can be taken southwest to St. Louis with access to I-44, I-55, and I-64. A transportation vicinity map is provided in **Appendix A**.

Railroads do not currently extend to the subject site. However, the Newport Chemical Depot Reuse Authority (NeCDRA) is working with the Decatur & Eastern Illinois Railroad and CSX to provide a corridor to bring rail to the site. The 1.5-mile rail corridor alignment that connects the Mega Park to the Decatur and Eastern Illinois Railroad was identified via preliminary engineering work by Burns & McDonnell and CSX. The Authority has purchased 2 of the 4 land parcels necessary to get rail into the Mega Park. Once the rail is connected, the rail can be extended to any location. The rail segment directly serving the site would extend from an east-west CSX line that links Decatur, IL to the CSX main north-south line from Chicago, IL to Jacksonville, FL. A transportation vicinity map is provided in **Appendix A**.

Airport access is beneficial for both corporate executive and other business-related representatives travel to a facility during construction and when operational. Cargo airport access provides opportunity for transportation of process input materials and product distribution. The Purdue University Airport (LAF) is within 65.7 miles northeast of the subject site (~1-hour drive). LAF is a regional general aviation facility operating two runways at lengths of 6,600 and 4,220 feet. For the 12-month period ending December 31, 2019, the airport had 117,727 aircraft operations, an average of 322 per day: 99% general aviation, 1% air taxi, <1% military/commercial. The airport has commercial charter, corporate and cargo flights that support the aviation needs of Tippecanoe County. LAF is one of the busiest airports in Indiana, second only to Indianapolis International Airport.

The Indianapolis International Airport (IND) is approximately 70.2 miles east (~1.5-hour drive) of the subject site. IND is home to the second largest FedEx Express hub in the world and was ranked as the sixth busiest U.S. airport in terms of air cargo throughput in 2020.

Seaport access is not required for the intended industrial/manufacturing and agribusiness project uses of the site. However, the nearest seaport Burns Harbor is located within approximately 149 miles (~2.5-hour drive) north of the site. Burns Harbor is located on Lake Michigan in the heart of the steel industry.

Utility Infrastructure is optimal for the subject site. Water, sewer, and natural gas are located and maintained on site and are operated as non-regulated utilities with unique rate structures to support economic development projects. Duke Energy provides electricity to the site and AT&T provides fiber optic service. All utility service points of access are located east of the study area at the existing development along Broadway Ave. Site utility information obtained from the "Vermillion Rise Mega Park West Value Proposition" is provided as **Appendix J**. An energy infrastructure and utility access point map is provided as **Appendix A**. **Appendix N** also includes a utility infrastructure overview map including locations of existing pipelines, transmission lines, wastewater treatment plant, water reservoir, and Duke Energy substation.

Potable Water is currently available to the site with existing high-capacity wells that are permitted to produce up to 30 million gallons per day (MGD). There is currently one of six existing horizontal collector wells (HCW's) in operation that is in a high volume/quality aquifer along the Wabash River. A seven-million-gallon reservoir is located on site. This is supplied by an 18-inch diameter high density polyethylene (HDPE) pipeline connected to a new 24-inch ductile iron pipeline. Water is pumped to various users on the site for fire suppression. Water from this reservoir could serve industrial processes. An existing 100,000-gallon elevated tank located in the Mega Park provides potable water storage. The Authority is permitted to withdraw 30 MGD from the aquifer. Upsized pumps in the existing well could deliver 10 MGD. A utility infrastructure overview map can be found in **Appendix N.**

Sewer/Wastewater is available to the subject site with a wastewater treatment plant (WWTP) located and operated on site. The WWTP has a design flow of 0.194 million gallons per day (MGD) and a design peak flow capacity of 0.540 MGD. From 2015 to 2016, the WWTP has received an average influent flow of 38,000 GPD and influent maximum month BOD and TSS loadings of 62 lbs./day and 47 lbs./day, respectively. The WWTP has capacity to accept additional domestic flows. Large wastewater discharges may be required to have on-site treatment of industrial wastewater to prevent process upsets at the WWTP. WWTP effluent is permitted and discharges through a 14-inch diameter force main to the Wabash River, approximately four miles away. A utility infrastructure overview map can be found in **Appendix N.**

Natural Gas is available with an 8-inch line with 40psig located 0.5 miles from the site. Infrastructure is currently owned and operated within the Mega Park. Wholesale natural gas supply is purchased from multiple suppliers via Panhandle Eastern Pipe Line Company. The NeCDRA owns and controls pipeline transportation capacity on Panhandle Eastern. The connection to the Panhandle Eastern Pipeline system has supply capability to the park via its four parallel supply lines. Panhandle Eastern Pipeline is an east-west gas transmission system. The park could easily be supplied as well via the Rockies Express east-west gas transmission system which is near the south side of the park. High volume natural gas delivery capability exists via either transmission system to support large natural gas consumption projects. A utility infrastructure overview map can be found in **Appendix N.**

Electric power is provided by Duke Energy with a 12kV distribution system and a new 10.5mva 69kV to 12kV substation which is expandable to 40mw. A 69kV line is located onsite and a 230kV transmission line is near the southeast corner of the property. Two 345kV transmission lines are near the site's western boundary. One of the lines is operated by Duke Energy and connects the Cayuga Generating Station to the Dresser substation. The other line is an AEP transmission line. Duke Energy has recently put into service a 230kV to 69kV substation to meet new large electric loads up to 200mw. A utility infrastructure overview map can be found in **Appendix N.**

Telco/Broadband is available to the site from AT&T via fiber optic service.

Major Market Areas are accessible within a two-hour drive of the subject site. The site is situated 73.5 miles from Indianapolis to the east and 155 miles from Chicago to the north with 2019 total populations of 864,447 and 2.71 million respectively. Travel distances to major markets and seaports are provided below. A major market vicinity map is provided as **Appendix A.**

Time and Distance to Major Markets


Major Markets	Travel Time	Miles
Indianapolis	1:48	73.5
Chicago	2:49	155
Fort Wayne	3:27	186
St. Louis	3:11	196
Cincinnati	3:14	212
Louisville	3:17	213
Milwaukee	4:12	249
Columbus	4:16	273
Toledo	5:00	285
Lexington	4:31	289
Nashville	5:12	290
Detroit	5:48	349
Cleveland	6:27	390

Time and Distance to Ports

Ports of Indiana	Travel Time	Miles
Burns Harbor	2:33	149
Jeffersonville	3:13	211
Mount Vernon	3:07	157

Community

Community aspects conducive to site competitiveness include both measurable and intangible factors that can either strengthen or undermine a site's inherent competitive advantages. While workforce availability and cultural features are commonly accounted for, business and political climate are often neglected, yet serve as an important indicator for both community and governmental desired to welcome new business investment. The Vermillion County community and political leadership are strong proponents of business growth and new job creation, creating a business climate highly conducive to project investment support through efficient permitting, workforce training, and competitive tax structures. Vermillion County is committed to supporting long-term industrial and commercial business operations in its communities.

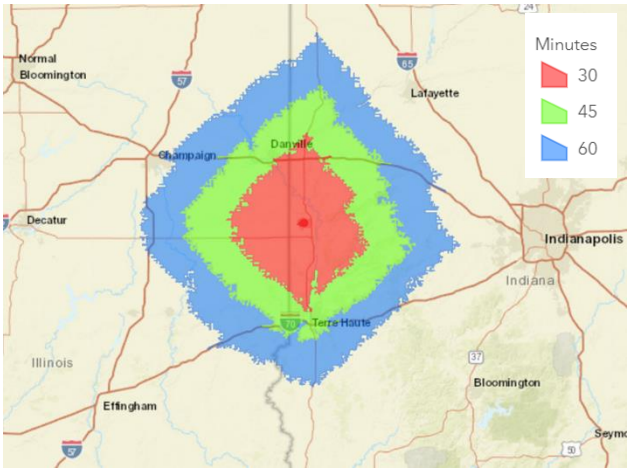

30, 45, 60-minute Drive-time Employment Query

Description of the Economy

Vermillion County is located in Indiana, a state that boasts a business-friendly environment, solid infrastructure, and substantial creation of manufacturing jobs. The county falls within the West Central region of Indiana and has a population of 15,462 (US Census Bureau). Newport, the county seat, has a population of about 309, while Clinton, the county's largest city, has a population of about 4,697 (US Census Bureau). Vermillion County is part of the Terre Haute, Indiana Metropolitan Statistical Area (MSA), an area consisting of four counties and centering around the city of Terre Haute. The Terre Haute MSA has a population of 185,031 as of the 2020 census. Vermillion County's extensive resources and central location with proximity to Terre Haute make it a powerful choice for companies small and large.

Demographics

Vermillion County has a population density of approximately 63 persons per square mile, falling below the state average of 183 ppsm. and ranks seventy-ninth of ninety-two counties in the state by population. From 2010 to 2020, Vermillion County decreased at a rate of 5.4%. In comparison, the State of Indiana and the nation increased at a rate of 4.2% and 7.4%, respectively. The population is roughly 97.2% White, 1.2% Black or African American, 0.3% Native American, and 0.2% Asian with most of the county's population consisting of non-Hispanic members, while about 0.9% are Hispanic or Latino. The county's median age is 42.9.

Employment and the Economy and Income

Vermillion County, IN is home to a highly engaged and skilled local workforce with a total resident labor force of approximately 7,269 people. Unemployment (3.9%) is slightly higher than the state average (3.1%). Manufacturing; Educational Services, Health Care & Social Assistance; and Retail Trade make up the largest industries in the county, employing 21.7%, 20.8%, and 11.9% of workers, respectively. In Vermillion County, the Manufacturing sector employs 1,472 people; Educational Services, Health Care & Social Assistance employs 1,407 people; and Retail Trade employs 808 people. The highest paying industries in the county, by median earnings, are Transportation & Warehousing, Real Estate, Construction, and Manufacturing, with median annual earnings of $58,529, $51,250, $43,056, and $42,086, respectively. Median household income is $50,243, which is less than the median annual income of $62,843 across the United States.

Population/Workforce *within a 60-minute drive time from the site include a total population of more than 370,156 and 12,987-plus businesses employing over 172,860 people according to Esri 2022 demographic data. Construction, manufacturing, and professional, scientific, & technical services account for 16.1% of businesses employing 26.9% of total workforce within the 60-mile radius of the site*. A 30, 45, and 60-minute drive-time query of employment numbers for construction and manufacturing jobs (by NAICS Code) was performed for the subject site. The following employment numbers were reported:

30, 45, 60-minute Drive-time Employment Count*

Business Type by NAICS Codes	Employees		
	30-min	45-min	60-min
Construction	1,589	5,984	11,421
Manufacturing	4,504	17,412	31,292
Professional, Scientific & Tech Services	532	2,779	4,965
Totals	**6,625**	**26,175**	**47,678**

**Source: Copyright 2022 Infogroup, Inc. All rights reserved. Esri Total Residential Population forecasts for 2022.*

Vermillion County target industries include Advanced Manufacturing (including automotive components, chemicals and plastics, primary metals, farm machinery and equipment, and food products), Agribusiness, Energy, Life Sciences, Information Technology, and Distribution. The Vermillion Rise Industrial Park is suitable to host a variety of Vermillion County industry targets. It is ideally suited to high intensity industrial development projects for Heavy Industrial, Light Industrial, and General/Heavy Agribusiness uses. With access to a total workforce of over 177,548, which includes 47,678-plus employed in construction, manufacturing, and professional, scientific, and technical services sectors, workforce availability to meet project labor demands of county industry targets is low and presents a challenge to project development potential for industries requiring a high labor force count. Population and business summary reports are provided in **Appendix I**.

Cultural Features within three miles of the subject site that may pose community risk or public opposition to industrial development are limited and generally do not affect site permitting, construction, or facility operation. Fire and police protection and emergency medical services are within relatively close proximity of the subject site. A cultural features map is provided in **Appendix A**.

Schools do not exist immediately proximate to the site or along principal site access routes. The nearest school to the site is Montezuma Elementary School located 7.1 miles southeast of the Mega Park. Site buildable area and site ingress/egress road access does not overlap with local school access routes. As such, the site poses no significant operational proximity or transportation risks to schools.

Churches do not exist within 3.0 miles of the subject site. All churches are sufficiently removed from the operational footprint of the site (e.g., buildable area). As such, the site poses no significant operational proximity or transportation risks to churches. There are several small churches within 5.0 miles of the site that are no consequence to future development.

Cemeteries are located within close proximity to the subject site. Five cemeteries are located on site within the Mega Park; two of them are located adjacent to the study area boundaries. These are known as the Carmack and Miller cemeteries. The site's buildable areas have been configured to avoid overlap with the cemeteries and have added additional acreage to give buffer.

Group Care Centers including nursing homes, assisted living centers, special education schools, crisis units, and hospice facilities do not exist immediately proximate to the site or along principal site access routes. The nearest assisted living center is Clinton Gardens about 15.5 miles south of the site boundary; it is not seen as a challenge to development.

Other Cultural Centers including libraries, museums and art galleries, movie theaters and performing arts centers, zoos and aquariums, arboreta and botanical gardens, and planetariums do not exist immediately proximate to the site or along principal site access routes.

Parks and Protected Lands do not exist immediately proximate to the site or along principal site access routes. The Vermillion County Trailhead Park is located north of the site across SR-63. This area is sufficiently removed from the operational footprint of the site (e.g., buildable area) and is buffered by a small, wooded area. Site ingress/egress road access does not intersect or share park access. A protected lands map is provided in **Appendix A**.

Correctional Facilities are located directly adjacent to the site's eastern boundary. The Vermillion County jail is located on the east side of SR-63. This could potentially be a challenge for future site to market operations. However, since the ideal future land uses are industrial and agribusiness, companies will likely not view locating within close proximity to the jail as a significant challenge.

Fire Protection/EMS is provided by the Hillsdale Volunteer Fire Station located within 7.4 miles of the site boundary/buildable area. The response route is roughly 12-minutes, with trucks taking IN-63 N Into the site's southern boundary. The site's northern boundary can also be reached on IN-63 S via a 9.4 -mile and 13 -minute drive. The Dana Community Fire Department could also be an option and is located east of the site in the Town of Dana. Fire and EMS response time and capacity should be locally verified.

Law Enforcement is provided by the Cayuga Police Department located within 9.4 miles of the site boundary/buildable area. The response route is Maple Street to IN-63 S and is measured as a 13-minute drive time to the site. The Clinton Police Department is located within close proximity to the site's southern boundary via IN-63 N and could be an option as well. Law enforcement response time and capacity should be locally verified.


Hospital/Emergency Care is provided by Union Hospital in the City of Clinton approximately 14 miles south of the site. Union Hospital is located 14.1 miles (~17-minute drive time) from the site via SR-63.

Historical Preservation records include locations of cultural or archaeological significance, some of which are formally designated as state and/or federally protected historical resources under State Historic Preservation Offices (SHPO) and/or National Register of Historic Places registrations. Historical resources, if located on the subject site, may alter, impede, or preclude development if potential for disturbance or encroachment exists. Historical resources located near the subject site may warrant mitigating site planning and design elements such as line-of-site buffering between facilities and a historically significant

structure. The Indiana Department of Natural Resources (IDNR) houses the Division of Historic Preservation and Archaeology (DHPA), which promotes the conservation of Indiana's cultural resources. The DHPA facilitates state and federal preservation programs and is the staff of the State Historic Preservation Office. The DHPA's Archaeology Team administers programs for protecting and preserving Indiana's prehistoric and historic archaeological sites, is the central repository of archaeological records and reports, and houses the state's official computerized database of archaeological site information.

Several cultural resource GIS datasets from the IDNR were consulted for potential location of culturally or historically significant resources on or near the subject site. These datasets are collected and contained within the State Historic Architectural and Archaeological Research Database (SHAARD), which allows users to search cultural resource information on known historic and archaeological resources throughout the State of Indiana. SHAARD includes data from the Indiana Historic Sites and Structures Inventory county survey (IHSSI), the Indiana Cemetery and Burial Ground Registry, historic bridges and canals, historic theaters, and properties listed in the National Register of Historic Places and the Indiana Register of Historic Sites and Structures. The data contained in SHAARD was collected from previously conducted cultural resource inventories, National Register nominations, and cultural resource management projects. SHAARD and associated resource maps are ongoing initiatives and are updated daily, so the absence of data does not necessarily indicate the absence of resources. A more formal archaeological survey may be necessary prior to site development.

A desktop data review was conducted regarding available records for potential cultural resources present on the subject property. *The SHAARD database identified no archaeological sites and no historic structures withing the study area. A single cemetery was identified along the study area's eastern boundary. The reported cemetery (Survey Number 165-148-10022) should not present significant impediments to development of the subject site. Five other historically significant resources are located within the 1-mile buffer surrounding the study area boundary. These do not appear to impact site development potential, but further investigation may be necessary to confirm their level of significance.* The SHAARD/IHSSI Report is provided as **Appendix K**, and the Historic Resource search map is provided as **Appendix A**.

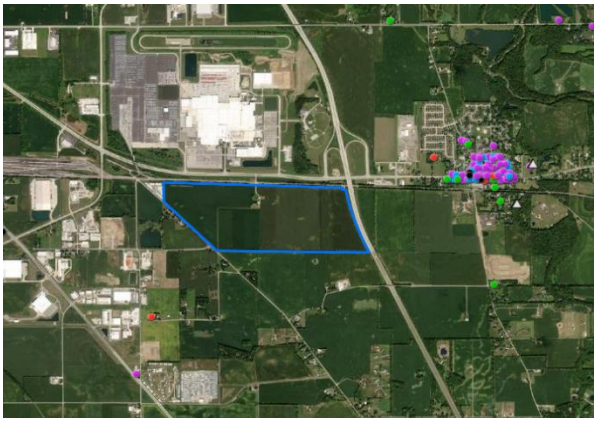

SHAARD Map Search

As with any desktop research exercise, actual potential historic preservation concerns may not be fully recognized or understood without conducting an on-site field investigation. The industry standard for real estate environmental review is the Phase I Cultural Resources Survey. The primary objective of a Phase I archaeological survey is to identify and record all cultural resources within a project area. Cultural resources can include prehistoric Native American habitation sites, historic

farmstead sites, standing structures, or other man-made features such as earthworks, old roadbeds, or cemeteries. The Phase I survey process typically begins with Phase IA Archaeological Reconnaissance to conduct historical research, environmental context review, and field inspection. When an archaeological site is encountered, a full written report must be submitted following guidance provided in the Current Guidebook for Indiana Historic Sites and Structures Inventory—Archaeological Sites and the Indiana Cultural Resources Manual.

Indiana Code 14-21-1 provides protection for archaeological sites and historic burial sites regardless of their location on state or private lands. All archaeological sites with artifacts dating before December 31, 1870 are protected under this act. Human burial sites are afforded protection under IC 14-21-1, IC 14-21-2, IC 23-14 (Indiana General Cemetery Act). The State of Indiana implements specialized reviews that provide protection to historic properties on state-owned or leased land or to historic properties that are listed in the National Register of Historic Places or the Indiana Register of Historic Sites and Structures and that will be altered, demolished, or removed using state funds. These review processes are established in Sections 14, 16, and 18 of Indiana Code 14-21-1. In addition, projects that will disturb the ground within 100 feet of a cemetery or burial ground for the purpose of excavating or covering the ground or erecting, altering, or repairing any structure are reviewed in Sections 26-26.5. In order to increase the confidence in understanding any potential historical preservation concerns for the subject site, it is recommended that a Phase I archaeological survey of the study area be conducted by a qualified cultural resource management/archaeological consulting professional and that archaeology state laws listed in Title 14, Article 21 of the Indiana Code are thoroughly understood. Relevant sections of the Indiana Code are provided as **Appendix K.** Information regarding Indiana Archaeology Law, complete with links to the full Indiana Code and Indiana Administrative Code, is also provided as **Appendix K.**

Two Phase I Archaeological Surveys have previously been performed within the Vermillion Rise Mega Park property by Brockington Cultural Resources Consulting. One survey was conducted between September 15, 2008 and January 16, 2009 on 1,200 site acres, and another between May 31, 2010 and August 27, 2010 on 1,641 site acres. Both Phase I Archaeological Surveys are provided as **Appendix L**. A Vermillion Rise Archaeological Sites map (also **Appendix L**), provided from Zoom Prospector, shows two archaeological sites of 950 and 450 acres. A portion of these boundaries overlap a portion of the SSI Phase II study area. The Zoom Prospector map links to the two Phase I Archaeological Surveys, but it is unclear how the boundaries depicted in the map coincide with the surveys.

In the 1,200-acre study, two previously recorded and 110 previously unknown archaeological resources were documented, including 82 prehistoric sites, 20 historic sites, and 10 mixed prehistoric and historic sites. Six sites were recommended potentially eligible for inclusion on the National Register of Historic Places (NRHP); Brockington recommended Phase II testing for these sites. The remaining 106 archaeological sites were found to be ineligible for inclusion on the NRHP and require no further work. In the 1,641-acre study, one previously recorded and 36 previously unknown archaeological resources were documented. This included eight prehistoric sites, 25 historic sites, and four mixed prehistoric and historic sites. Five of the sites were recommended potentially eligible for inclusion on the NRHP, with recommendation for Phase II testing if avoidance and preservation in place is not possible. All remaining 32 archaeological sites were recommended ineligible for inclusion on the NRHP, requiring no further work.

It is recommended that any other areas potentially affected by site development be assessed as to whether a Phase Ia Archaeological Survey is necessary and addressed accordingly.

Education and Technical Training Assets are strongly positioned to serve professional and technical workforce needs of Vermillion County target industries, while colleges and universities provide valuable recruiting opportunities to local businesses.

The Indiana Department of Workforce Development (DWD) offers a variety of services to statewide job seekers looking to enter the workforce, return to the workforce, or locate education and training opportunities. These include Hoosier Talent Network, INDemand Jobs, Indiana Career Explorer, Indiana Career Connect, Cyberseek Indiana, and Indiana Career Ready. The DWD offers several services including job search help, hiring events, training grants, specialized training and more: https://www.in.gov/dwd/.

Indiana's WorkOne Career Centers are the heart of the workforce development system, providing assistance in understanding jobs in demand today, helping workers determine their interests and abilities, offering access to training opportunities, and providing information needed to succeed in today's economy. WorkOne's Job Opportunities and Business Services (JOBS) Program assists employers in locating and developing a skilled team by determining eligibility, recruiting employees, formulating WorkKeys job profiles, and providing skills assessments to identify gaps and training needs. WorkOne's WIN Career Readiness is a fundamental workplace skills training system available to Indiana residents, employers and training providers. Both the DWD's Work Opportunity Tax Credit (WOTC) and Federal Bonding Program benefits employers by offering incentives for hiring jobseekers who may traditionally have difficulty finding employment.

Next Level Jobs provides free training for Indiana workers and reimbursements for Indiana employers for training employees in high-demand fields. Next Level Jobs assists job seekers by providing Indiana residents with free training in high-growth job fields and the opportunity for them to earn a high-value certificate in one of Indiana's in-demand job fields, tuition free. Next Level Jobs assists employers with reimbursements for training their employees through the Employer Training Grant, which will reimburse an employer for up to $5,000 per trained employee who is trained, hired, and retained for six months, granting up to $50,000 per employer.

Other workforce development training programs in Indiana include Ivy Tech Community College's Workforce Certification Center, which prepares students for promising sectors such as biofuels and advanced manufacturing, and Ready Indiana, the Indiana Chamber of Commerce's workforce education initiative that supports employer efforts to sharpen vocational skills.

Vermillion County encourages its middle and high school students to participate in vocational education classes, and the Vermillion County Leadership Program in partnership with Purdue Extension is also available. This program aims to cultivate local leaders by helping them better understand the county's environment and their own leadership potential.

Situated between two states, Vermillion County has access to a multitude of colleges and universities. Ivy Tech Community College is two-year vocational/technical college with 46 locations throughout the state and a campus within a 15-minute drive of the subject site in the City of Rockville. The site is within reach of other Ivy Tech campuses as well, including Terre Haute and Crawfordsville. Ivy Tech specializes in developing programs geared towards specific skills needed for existing manufacturers and other industries. Purdue University is located within an hour drive of the site. Purdue is a "Big Ten" public land-grant research university and the flagship campus of the Purdue University system. It enrolled nearly 50,000 students in the Fall of 2021. Purdue is known both nationally and internationally as an exceptional school boasting high-quality programs, including in the STEM fields such as engineering, mathematics, and information technology. The university provides rigorous academic programs and is a national and global leader in research, discovery, and innovation, providing ample recruitment opportunities and a reliable potential workforce to the Vermillion Rise Mega Park.

Other nearby colleges and universities within an hour of the subject site include Indiana State University College of Technology, the Rose-Hulman Institute of Technology, Saint Mary-of-the-Woods College, Wabash College, and Fortis College nursing school. The site is also well within reach of several colleges and trade schools in the Indianapolis area.

Business Climate is highly favorable for bringing in quality job-creating businesses to the area. Indiana is considered one of the best states in the nation for long-term fiscal stability and low corporate income tax rates, creating a business-forward environment throughout the state. The State of Indiana's target Industries according to the IEDC include advanced manufacturing, aerospace and aviation, ag-bioscience, defense, life sciences, logistics and transportation, and technology. These industries can take advantage of existing transportation assets throughout the state and county to serve an array of unique business logistical needs. The following target industries are listed by Vermillion County Government: Advanced Manufacturing (including automotive components, chemicals and plastics, primary metals, farm machinery and equipment, and food products), Agribusiness, Energy, Life Sciences, Information Technology, and Distribution.


Vermillion County has a labor force of 7,269 and an unemployment rate of 3.9%. Business development and assistance is provided locally by Vermillion County Economic Development Council. Vermillion County's local incentives include lowered business start-up costs using 10-year tax abatements on both real and personal property, along with Tax Increment Financing (TIF) that can help to fund infrastructure costs, debt service, and other costs related to business investments. In addition, local officials can discuss additional incentive programs that may be available depending upon the specific details of projects.

In addition, the IEDC provides for a variety of programs and initiatives offering business support and expertise to companies that are investing and creating jobs in Indiana. These include the Indiana Regional Cities Initiative, Certified Technology Park program, Broadband Ready Communities program, and Next Level Roads program.

The State of Indiana offers a variety of incentives for all types of businesses, including targeted industries, workforce training, infrastructure and special opportunity incentives. Indiana's business tax structure is competitive—the corporate income tax is decreasing to 4.9%, and the state offers many business tax

incentives, corporate tax credits and economic development programs. Statewide incentives include the Community Revitalization Enhancement District (CRED) Tax Credit, Data Center Gross Retail and Use Tax Exemption, Economic Development for a Growing Economy (EDGE) Tax Credit, Headquarters Relocation Tax Credit (HRTC), Industrial Grant Fund (IDGF), Tax Exemption for Patent-derived Income, Skills Enhancement Fund (SEF), Venture Capital Investment Tax Credit (VCI) program, Hoosier Business Investment (HBI) Tax Credit, Research Expense Credits, Research and Development Sales Tax Exemption, and Redevelopment Tax Credit (RTC).

Political Climate is strong according to interviews with local officials, and the community is largely in favor of commercial/industrial business development to bring long-term economic growth to the area, especially in advanced manufacturing sectors.

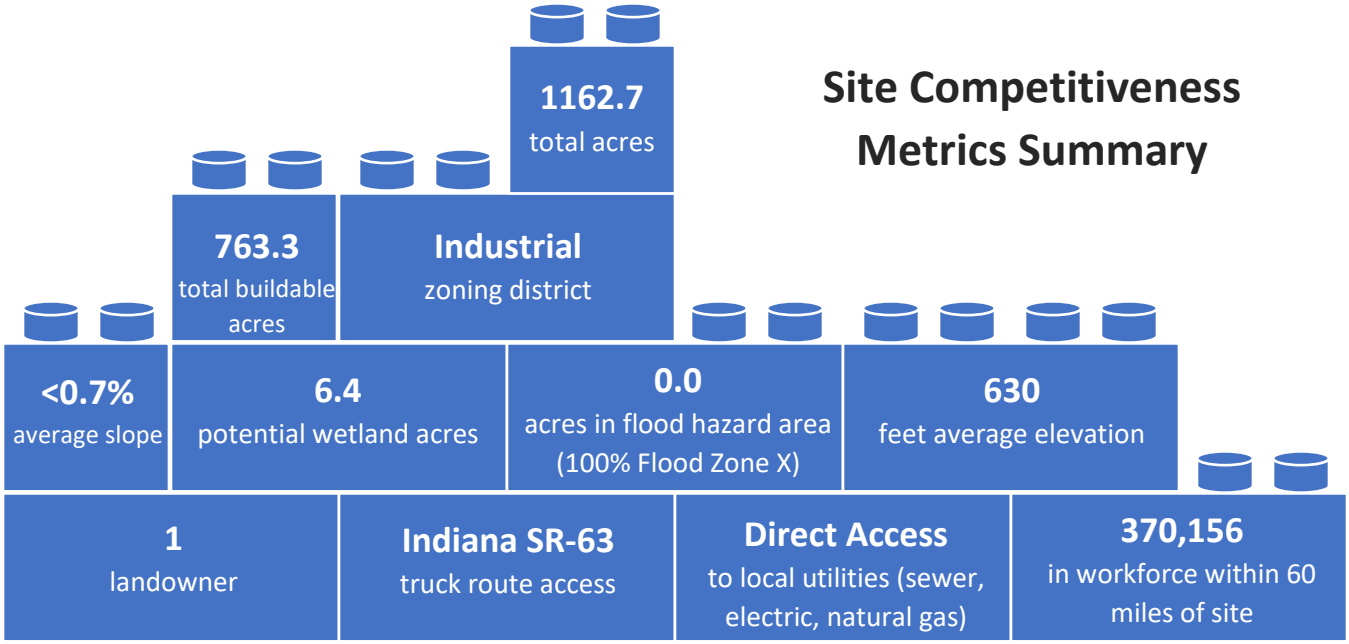

Site Competitiveness Report Card

The Site Competitiveness Report Card is an indicator of favorable development conditions across customary competitiveness factors. A relative score for each factor is given as a letter grade, akin to a 4.0 education grade point average (GPA). The GPA is calculated for each competitiveness area: Condition, Connection, and Community with an overall site GPA derived as a relative indicator of site competitiveness for an economic development land use.

Competitiveness Driver		
Condition	Comments	3.4
Engineering		
Elevation/Slope		A
Flood Risk		A
Buildable Configuration		A
Land Cover		A-
Environmental/Cultural Resource		
Potential Wetlands		A-
Legacy Environmental Liabilities		A
Potential T&E Risk		C
Connectivity		3.1
Transportation		
Interstate		C
Multi-lane Truck Route (SIS Road)		A
Class I Rail		B-
Airport (passenger)		C
Airport (cargo)		C
Seaport/Inland Port		N/A
Utilities		
Potable Water		A
Sewer/Wastewater Treatment		C
Natural Gas		A
Electric		A
Broadband/Fiber		A
Community		3.4
Cultural		
Compatibility with Surrounding Land Use		A
Community Acceptance		A
Economic		
Market Vitality		A
Tax Incentives		A
Labor		
Workforce		D
Wage Competitiveness		B
Political		
Permitting Expediency		A
Business Climate		B+

Site GPA

3.3

Rough Order-of-Magnitude Site Development Cost Summary

A rough order-of-magnitude (ROM) cost estimation for pre-construction site preparation and utility and transportation infrastructure improvements was calculated to provide a general understanding of potential site development costs. ROM costs were calculated for the 216.2-acre buildable area, which was devised to avoid more costly site leveling due to elevation/slope conditions occurring on the eastern-southeastern perimeter of the site. ROM cost tables for the buildable area are presented below.

Notes:

- *Does not include costs for engineering, permitting, or general project management.*
- *This cost estimate was prepared with the best information available at the time of analysis.*
- *Actual costs can vary based on availability of material, site conditions, and labor.*
- *ROM costs generated from GIS data and use of RSMeans construction cost estimating software.*

Site Competitiveness Opinion

*****N/A*****

Purpose and Use of Study

Sites originating from Phase I have demonstrated qualitative compliance with engineering. environmental, infrastructure, and cultural location criteria. That said, in order to develop an actionable understanding of true site competitiveness, a more detailed study of the subject site is required. SSI Phase II: Preliminary Due Diligence is designed for this purpose.

Purpose

The purpose of the SSI Phase II study is to provide an understanding of the subject site's advantages and challenges in conjunction with a ROM cost estimate to improve site functional use and mitigate development challenges. The SSI Phase II study is a desktop-based preliminary due diligence exercise performed by discipline-specific experts with experience in industrial and commercial property development. Study of the subject site's physical and surrounding characteristics, assets, and impediments for development are reviewed in sufficient detail to formulate a defendable opinion on the competitive value of the property for economic development.

Use

There are three primary intended uses of an SSI Phase II report: (1) site advancement decision support; (2) consideration for investment in site improvements; and (3) site marketing. Each intended use is discussed below.

Site Advancement Decision

The SSI Phase II study is designed to provide decision support for the advancement of sites to market though the landowner engagement process. SSI Phase II findings serve as an indicator for the likelihood

the subject site will survive the intensive scrutiny of formal, field-based engineering and environmental due diligence. Detection of severe site deficiencies or encumbrances, often referred to as fatal flaws, during desktop preliminary due diligence can avoid expenditure of significant resources in subjecting sites with little chance of survival to formal due diligence. Short of fatal flaws, SSI Phase II may reveal less than ideal conditions or less severe yet concerning challenges that can marginalize site competitiveness or be detrimental to business attraction, respectively. The most important use of the SSI Phase II study is to ensure confidence in the decision to advance sites to market graduation through subsequent phases for landowner engagement and formal due diligence. *Ultimately, site advancement decisions should be tempered by local industry targets and the host community's real estate needs to support those targets.*

Site Improvement Investment Considerations

The findings of the Phase II study, along with an estimate of the ROM costs needed to make functional site and infrastructure improvements, provides concrete data for Economic Development Offices (EDOs) to consider while making investment decisions to improve site marketability. There may be strong business cases for increasing site competitiveness by making incremental investment in infrastructure improvements or mitigation of development challenges. There are many conditions to be considered in investing significant dollars on speculative site improvements including market, economic, fiscal, real estate, and political factors. While the information provided through the SSI Phase II study should not be exclusively considered for site improvement expenditures, the findings may provide an initial quasi prospectus on site development expenditure and associated return-on-investment (ROI).

Site Marketing

The best greenfield site in America is of no consequence to the host community if industry prospects are unaware of its value and availability. Many EDOs invest in branding and marketing campaigns to showcase their community's differentiating attributes to attract business investment. If prematurely launched, many communities unfortunately become "the dog that caught the car". The well-qualified community successfully attracts the serious interest of a prospective company only to lose the project, and possibly credibility for future projects, because it fails to offer a competitive site.

It is the opinion of LL+D, based on extensive industrial and commercial site selection experience, that the methodology, objectivity, and level of detail and completeness provided in this report are sufficient to support the competitive claims of the subject site for its intended project land use(s). Accordingly, the information contained in this report can and should be used to supplement site marketing materials, specifically for RFI responses and proactive target industry solicitations. However, EDOs should exercise judicious use of SSI Phase II site information for the purposes of site marketing in advance of formal landowner engagement and security of real estate purchase opinion. The real estate purchase option is pursued during SSI Phase III: Landowner Engagement.

Warranty

All Phase II project tasks are intended to serve as an informed guide to determination of site advancement to the formal due diligence phase of inventory development. All information and opinions provided in this report are limited to planning-level engineering and environmental considerations and do not rise to the investigative level of study for site design uses.

All data used in this study originates from public domain sources. All findings derived from the use of public domain data are subject to potential errors and omissions inherent digital data sets which may include spatial and attribute accuracy, completeness, and currency. Data and other information cited in this study has not been verified for quality of accuracy. As such, the confidence in findings provided herein and corresponding opinions are subject to the limitations of the data and other information sources consulted in the conduct of this study.

Ultimate site development potential and fatal flaw analysis cannot be determined without physically visiting the site and conducting formal engineering and environmental due diligence. However, Leotta Location and Design is confident that our site screening methodology is highly effective in eliminating low quality or practically undevelopable sites and presents candidate sites with a high likelihood of confirming results through more formal engineering and environmental due diligence.


APPENDIX A

SITE MAPS

SSI Phase II: Preliminary Due Diligence

Vermillion County, Indiana

Site ID: 18165-027 PII Study Area (1162.7 acres)

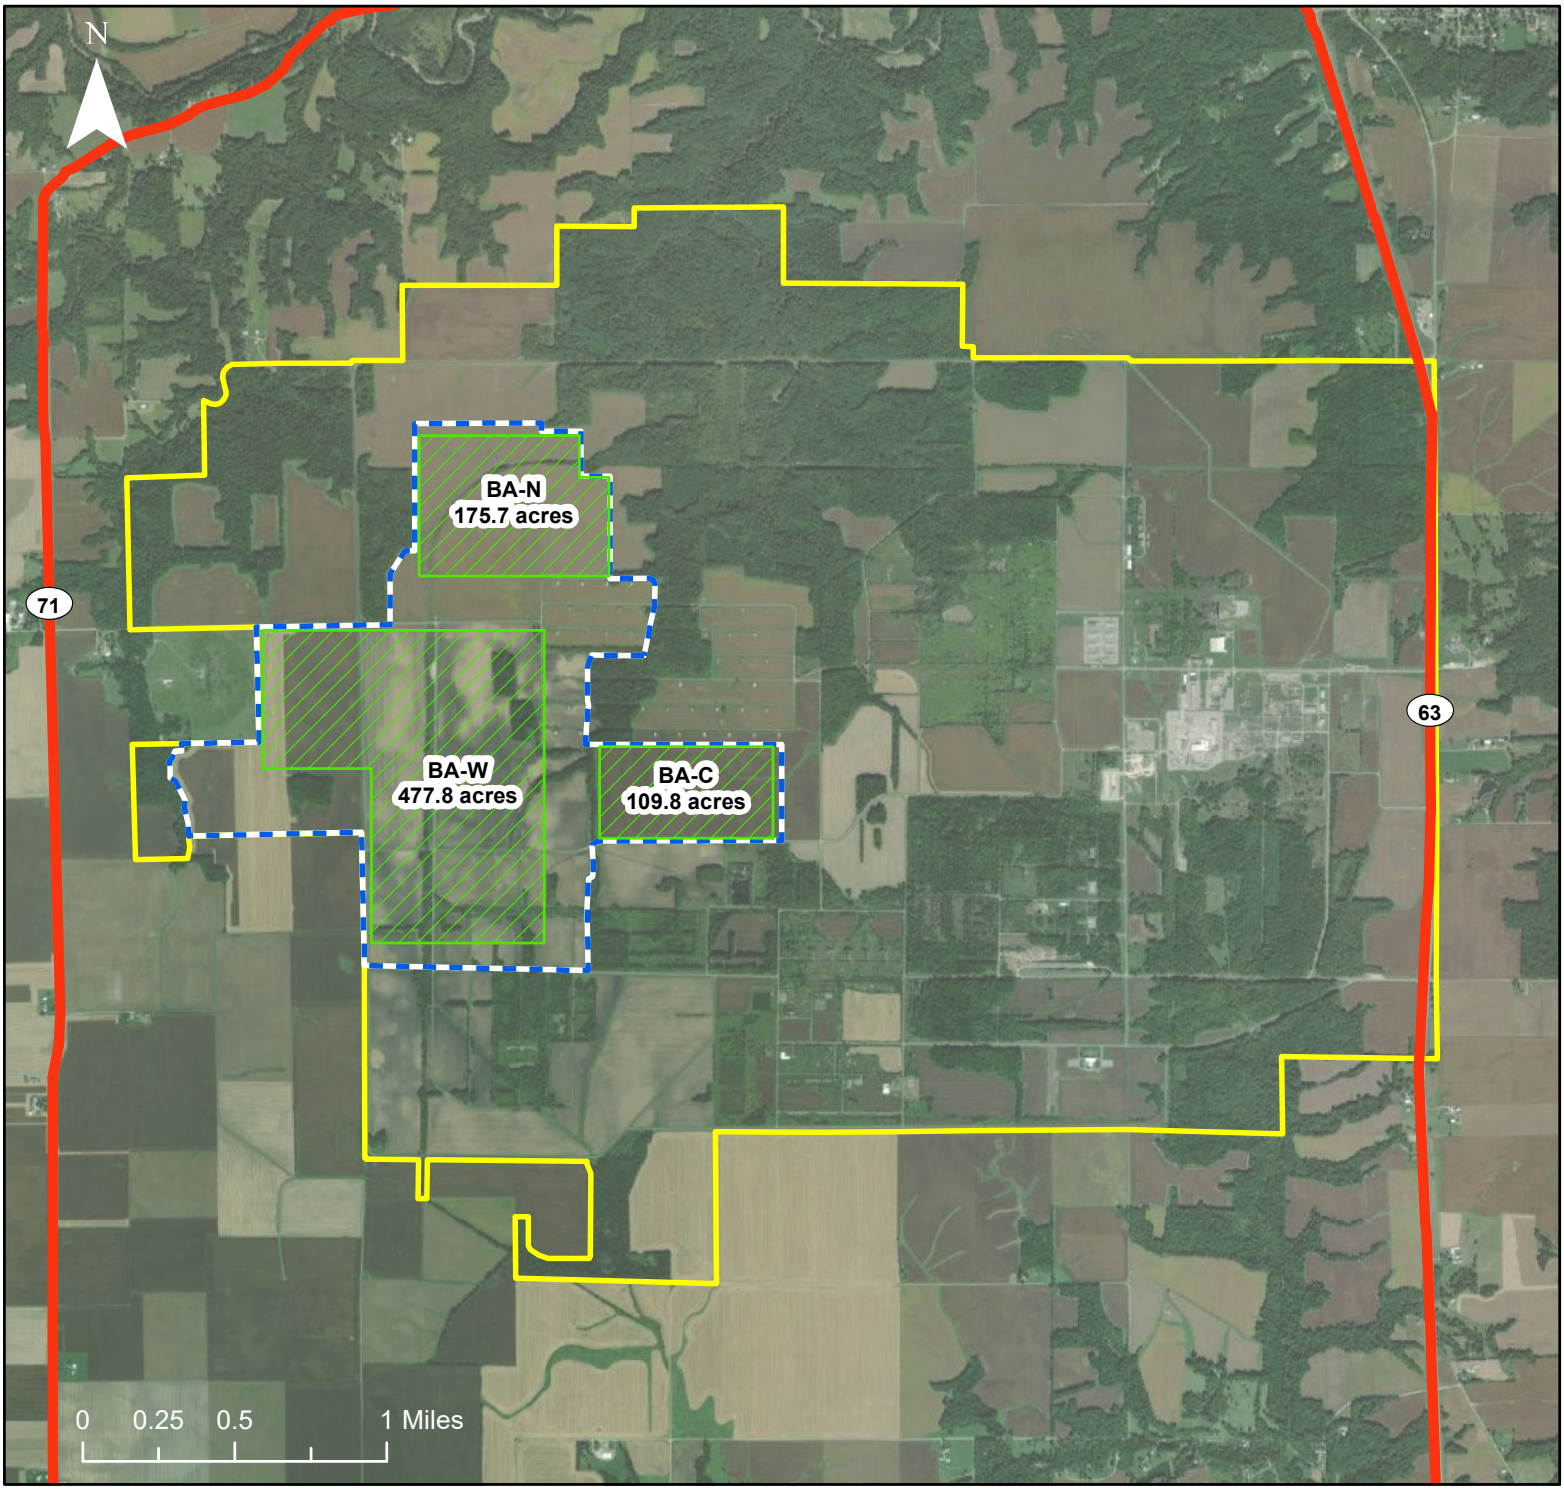

Legend

- State Highway
- Site Boundary
- SSI Phase II Study Area
- Buildable Area

SITE MAP

Site: ~1162.7 acres

Buildable Areas: BA-N ~175.7 acres

BA-W ~477.8 acres / BA-C ~109.8 acres

SSI Phase II conducted by:


SSI PROGRAM

LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Vermillion County, Indiana

Site ID: 18165-027 PII Study Area (1162.7 acres)

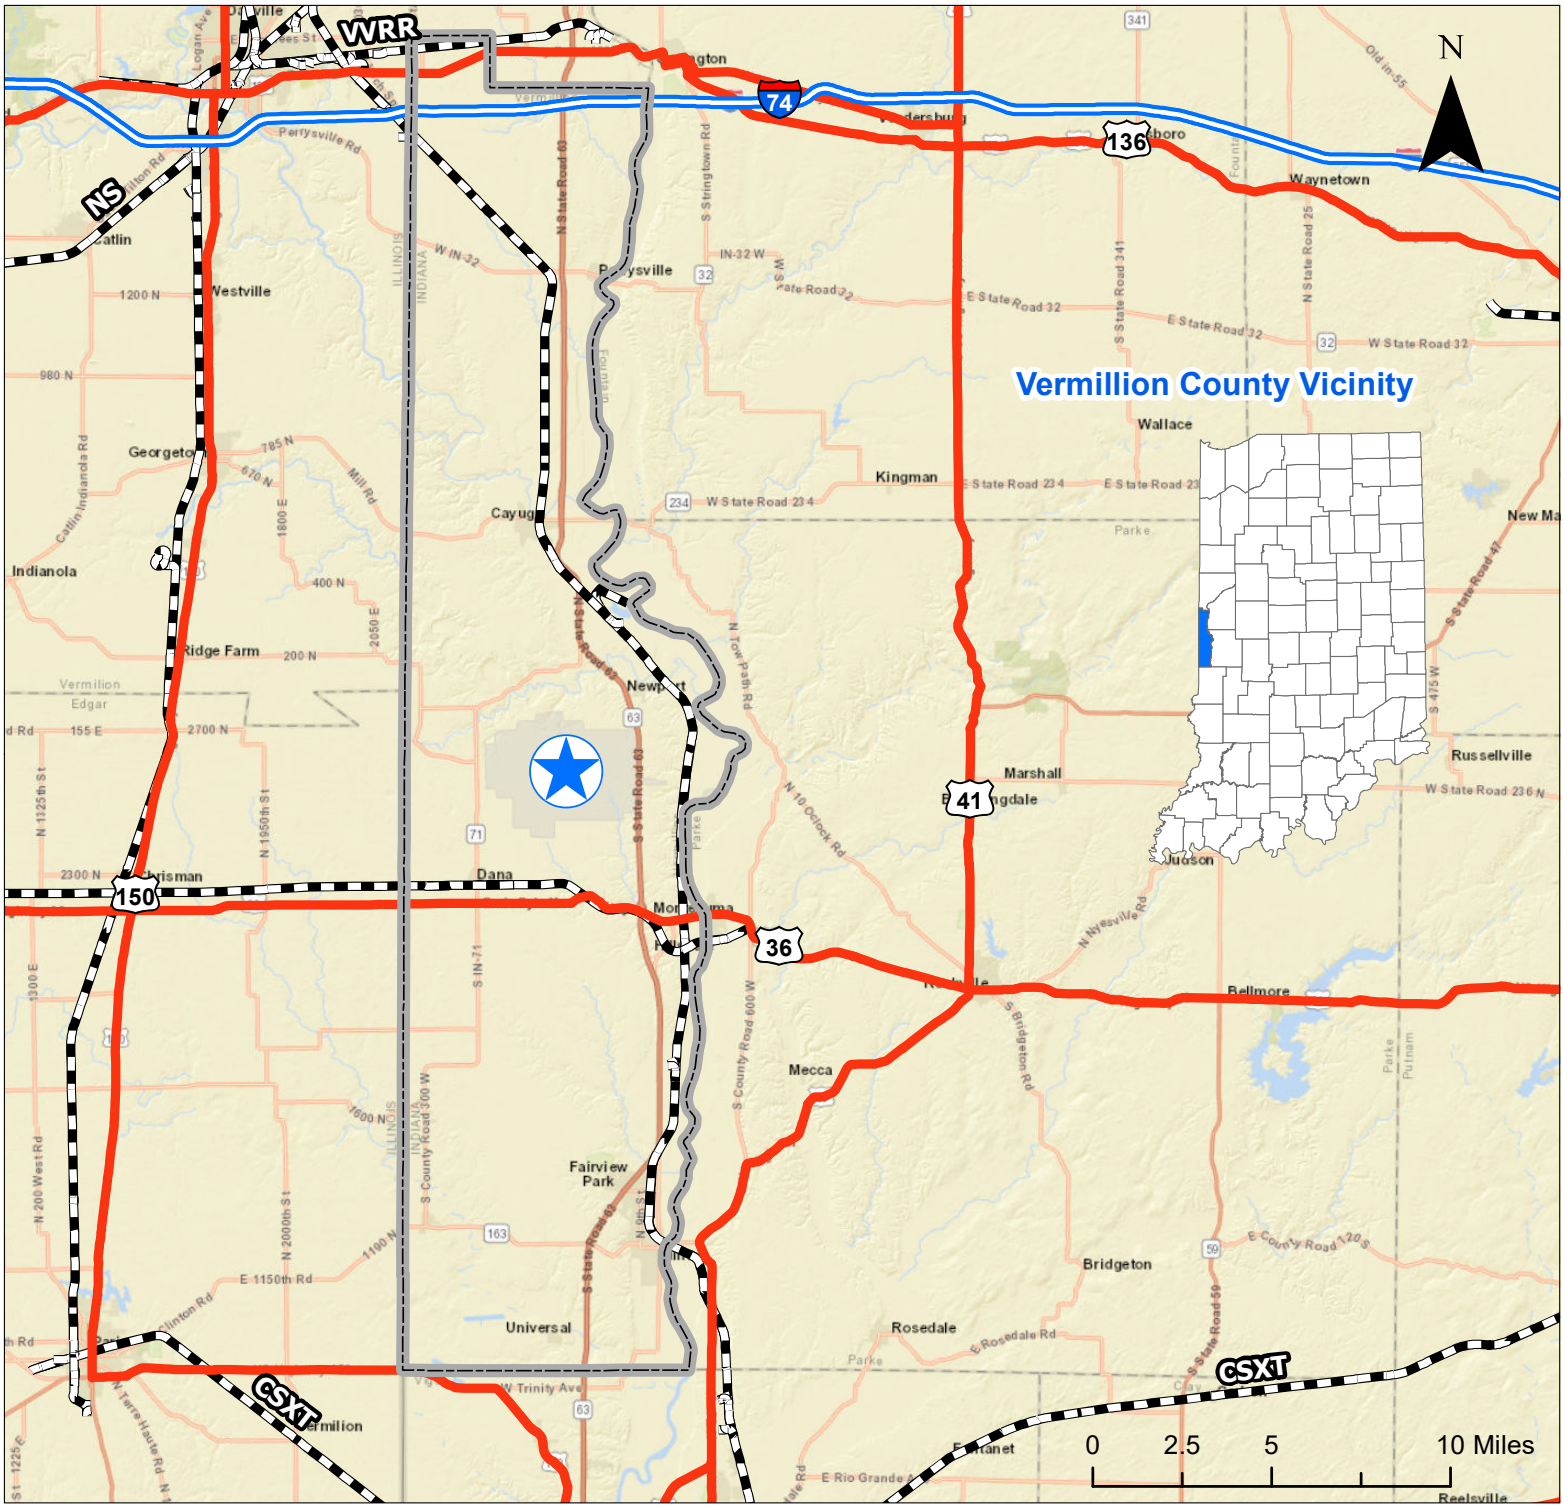

Legend

- Vermillion County
- Site Point
- Interstate
- U.S. Highway
- Class I Railroad

SITE VICINITY

Vermillion County, Indiana

SSI Phase II conducted by:


SSI PROGRAM

LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Vermillion County, Indiana

Site ID: 18165-027 PII Study Area (1162.7 acres)

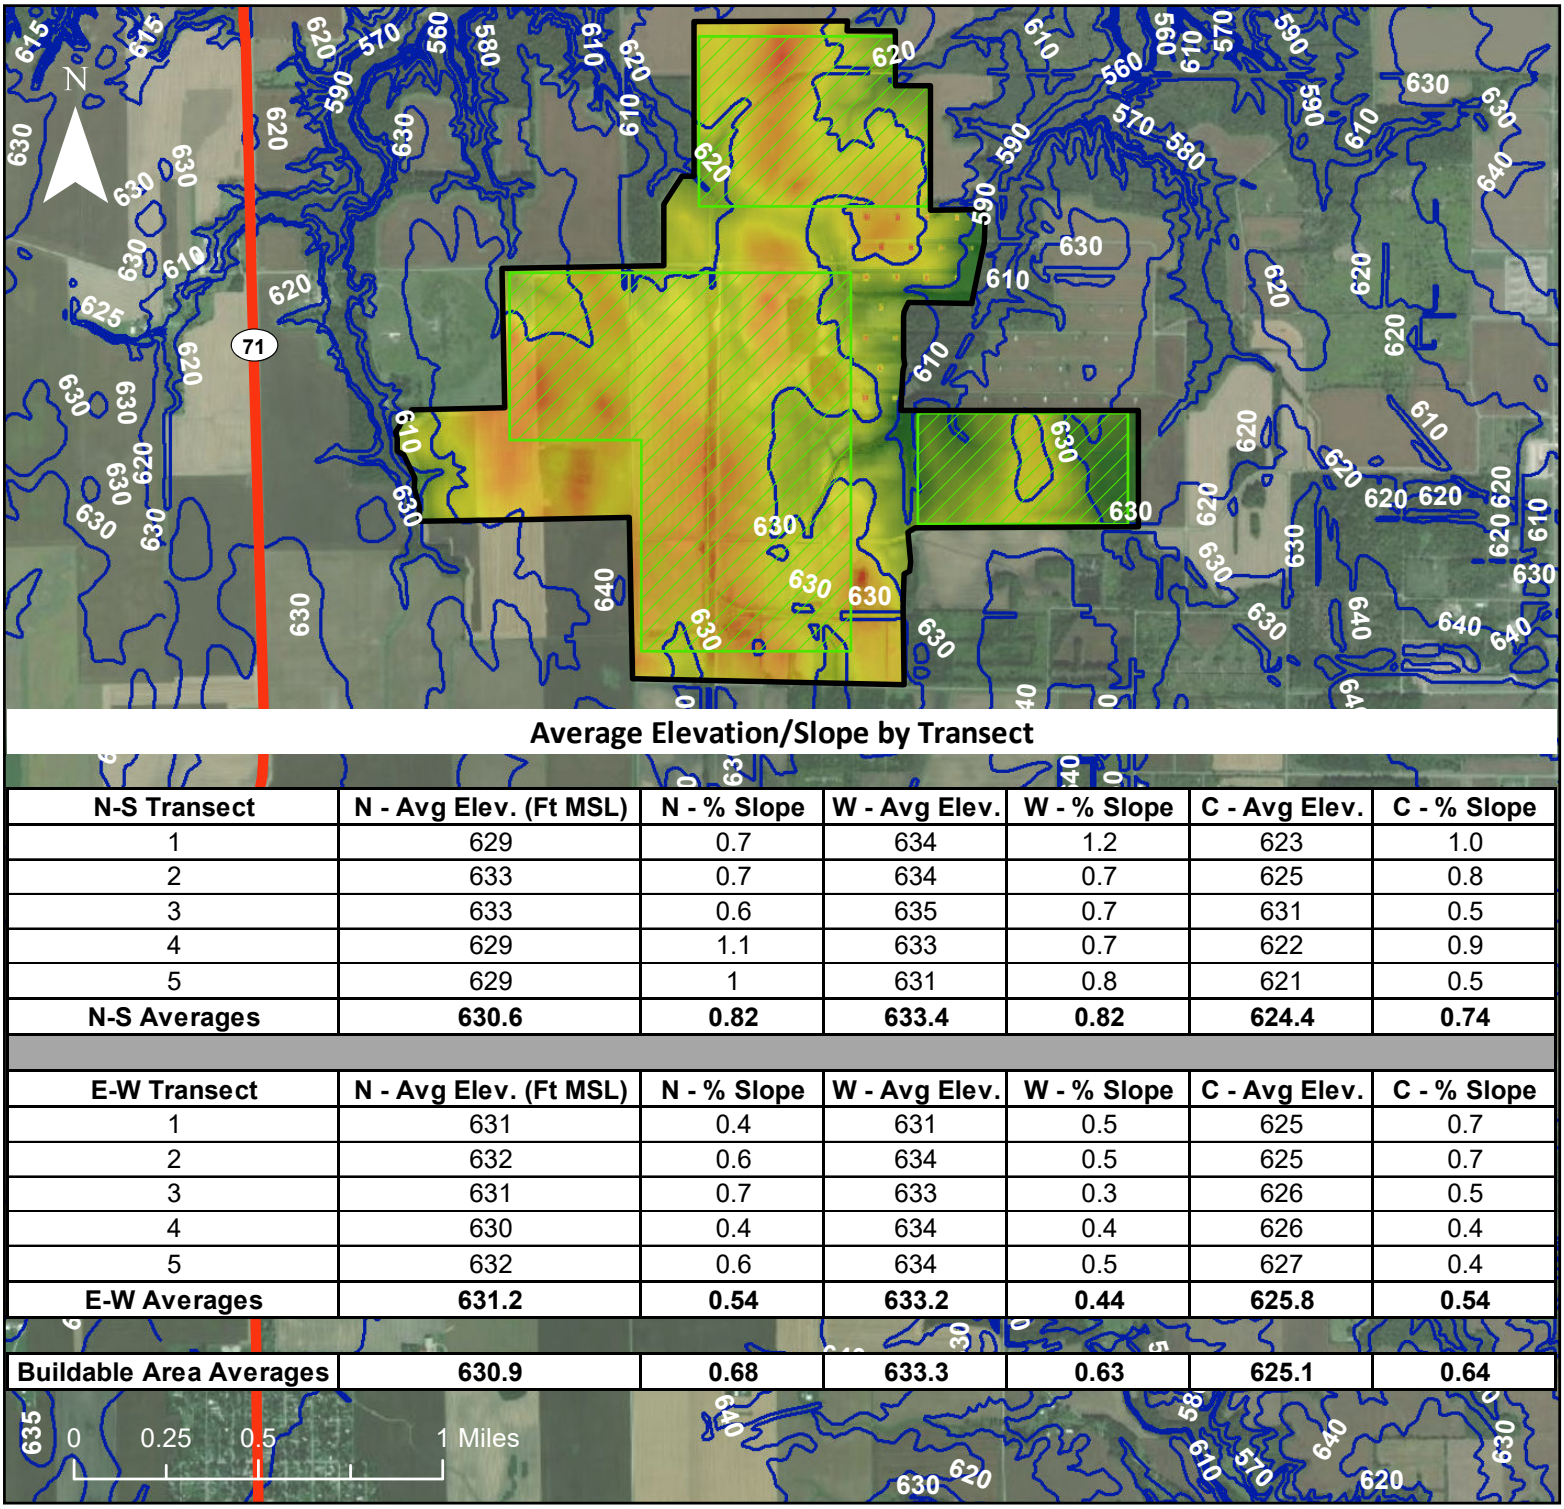

Average Elevation/Slope by Transect

N-S Transect	N - Avg Elev. (Ft MSL)	N - % Slope	W - Avg Elev.	W - % Slope	C - Avg Elev.	C - % Slope
1	629	0.7	634	1.2	623	1.0
2	633	0.7	634	0.7	625	0.8
3	633	0.6	635	0.7	631	0.5
4	629	1.1	633	0.7	622	0.9
5	629	1	631	0.8	621	0.5
N-S Averages	**630.6**	**0.82**	**633.4**	**0.82**	**624.4**	**0.74**

E-W Transect	N - Avg Elev. (Ft MSL)	N - % Slope	W - Avg Elev.	W - % Slope	C - Avg Elev.	C - % Slope
1	631	0.4	631	0.5	625	0.7
2	632	0.6	634	0.5	625	0.7
3	631	0.7	633	0.3	626	0.5
4	630	0.4	634	0.4	626	0.4
5	632	0.6	634	0.5	627	0.4
E-W Averages	**631.2**	**0.54**	**633.2**	**0.44**	**625.8**	**0.54**

Buildable Area Averages	**630.9**	**0.68**	**633.3**	**0.63**	**625.1**	**0.64**

Legend

- State Highway
- Contours - 10 ft
- SSI Phase II Study Area
- Buildable Areas

LiDAR-derived DEM

Value

- High : 644.308
- Low : 610.146

BUILDABLE AREA ELEVATION/SLOPE

LiDAR-derived Digital Elevation Model

SSI Phase II conducted by:


SSI PROGRAM

LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Vermillion County, Indiana

Site ID: 18165-027 PII Study Area (1162.7 acres)

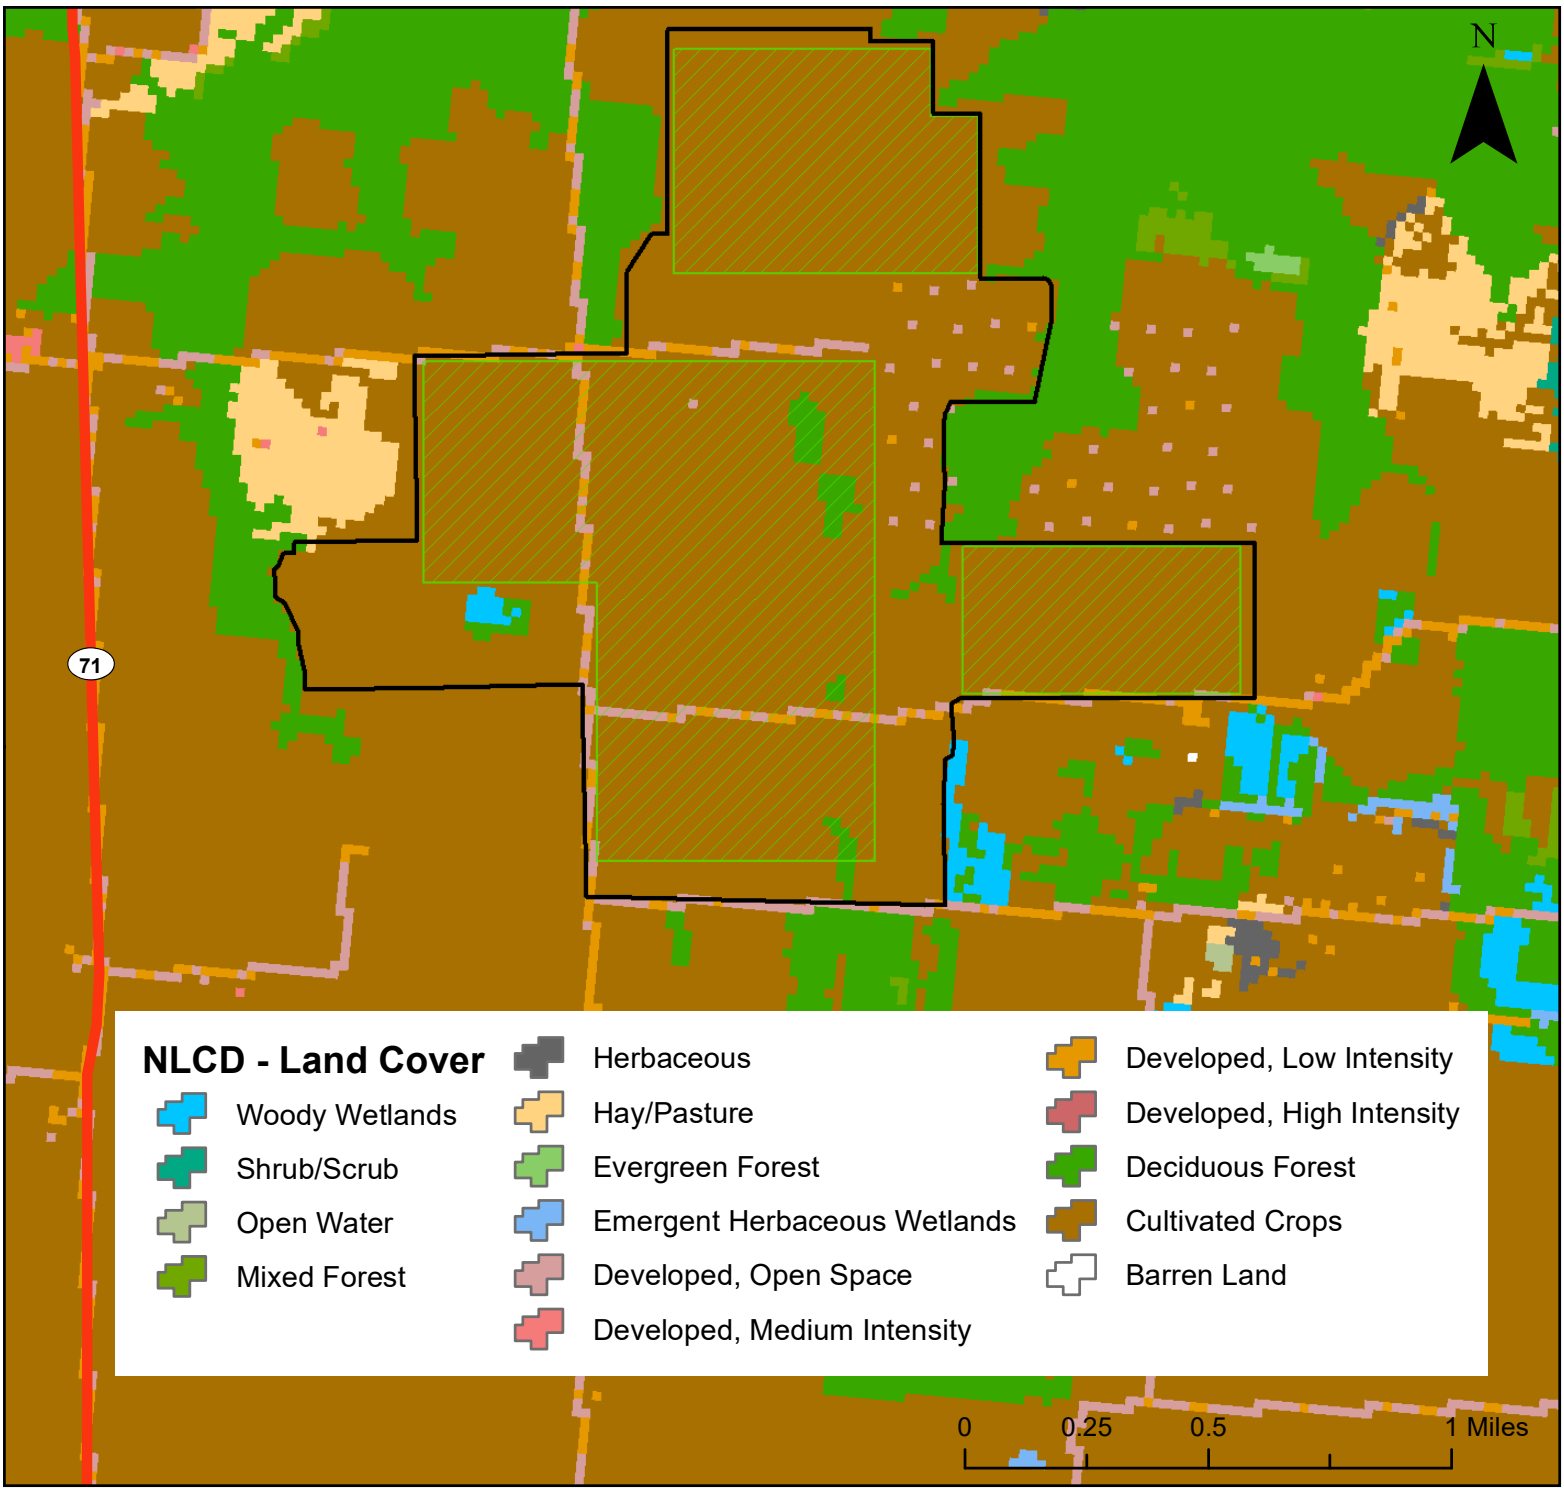

Legend

- State Highway
- SSI Phase II Studay Area
- Buildable Areas

LAND COVER CLASSIFICATIONS


Indiana 2019 Land Cover Map

SSI Phase II conducted by:

SSI Phase II: Preliminary Due Diligence

Vermillion County, Indiana

Site ID: 18165-027 PII Study Area (1162.7 acres)

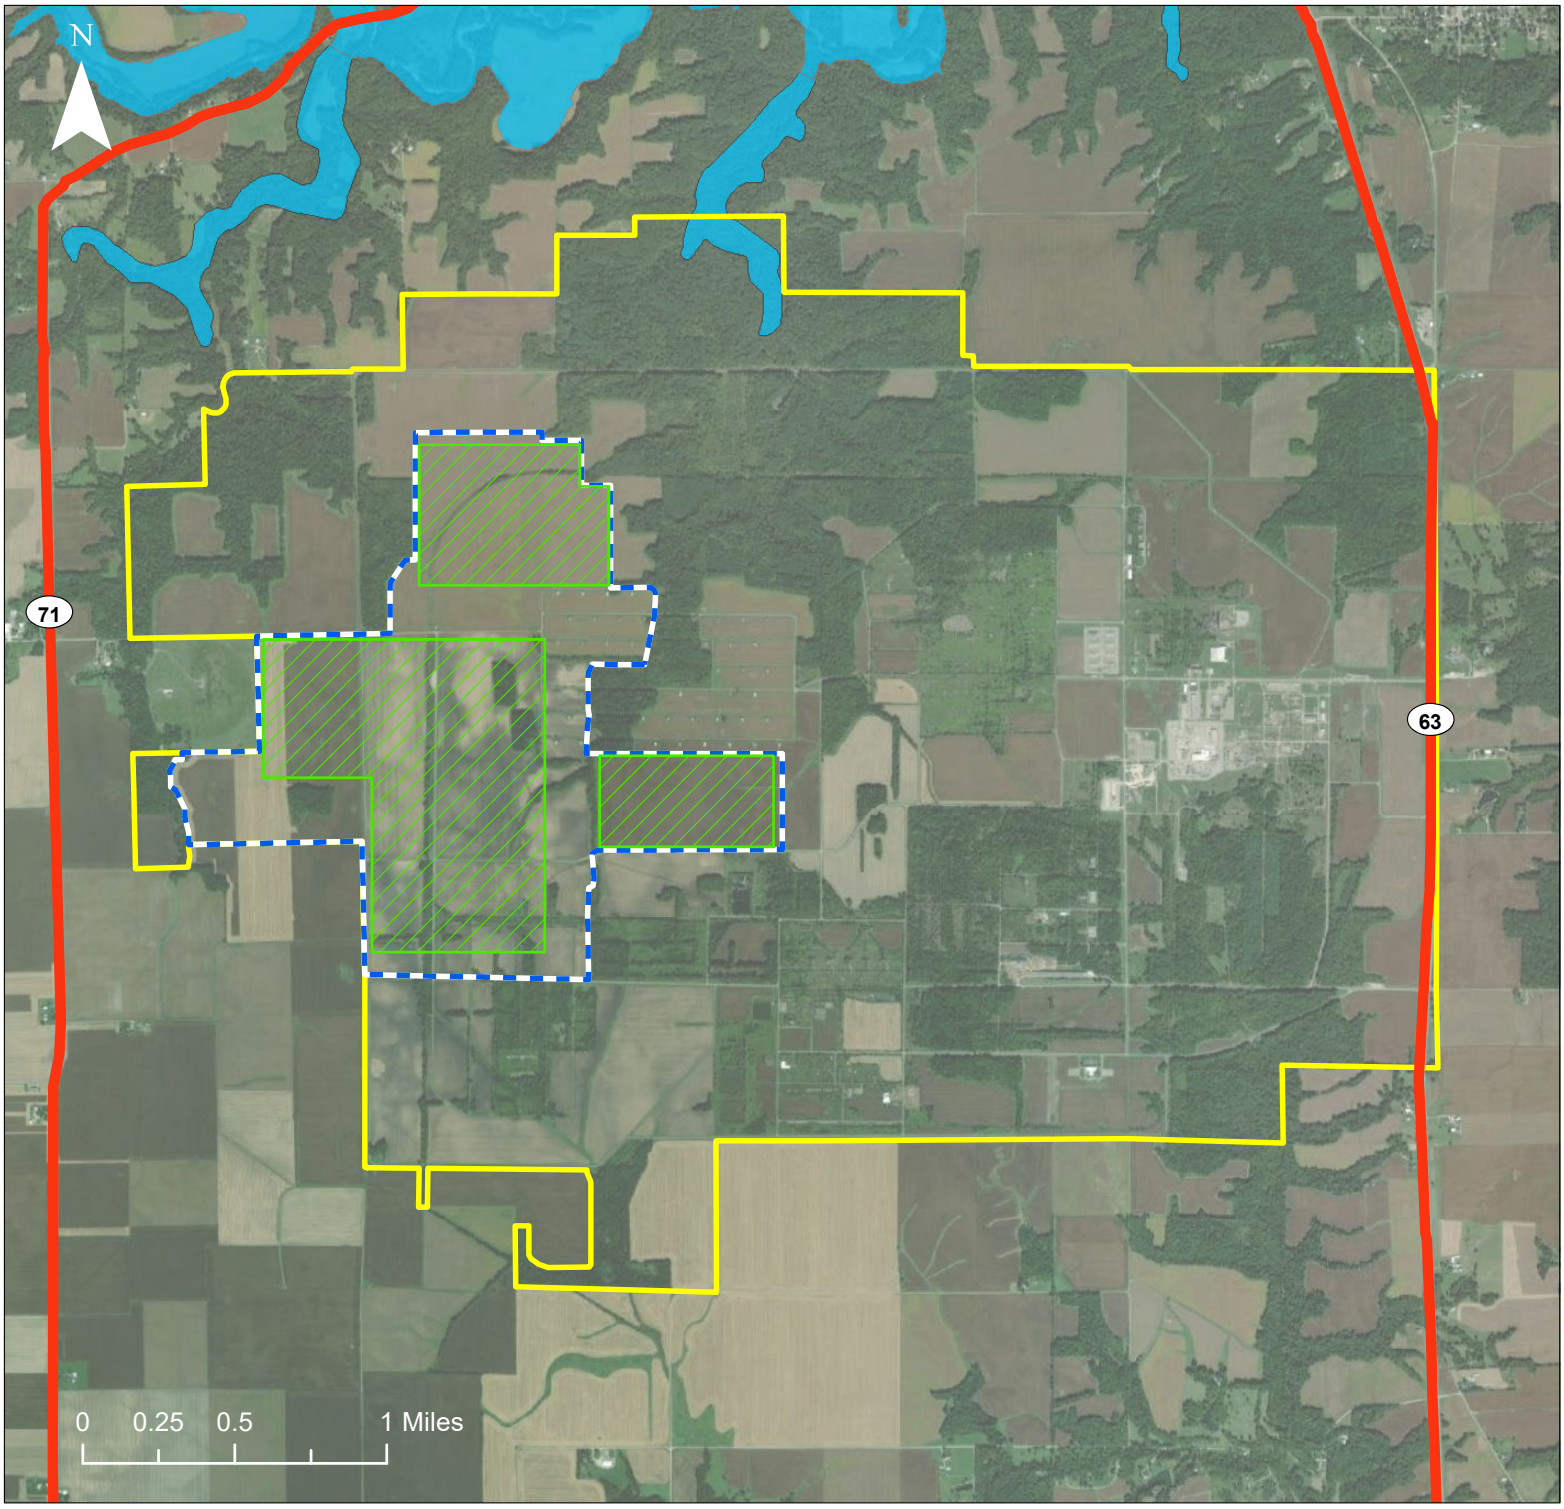

Legend

- State Highway
- Site Boundary
- SSI Phase II Study Area
- Buildable Areas

Flood Zone

- A
- X

Potential Flood Hazard

FEMA National Flood Hazard Layer

SSI Phase II conducted by:


SSI PROGRAM

LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Vermillion County, Indiana

Site ID: 18165-027 PII Study Area (1162.7 acres)

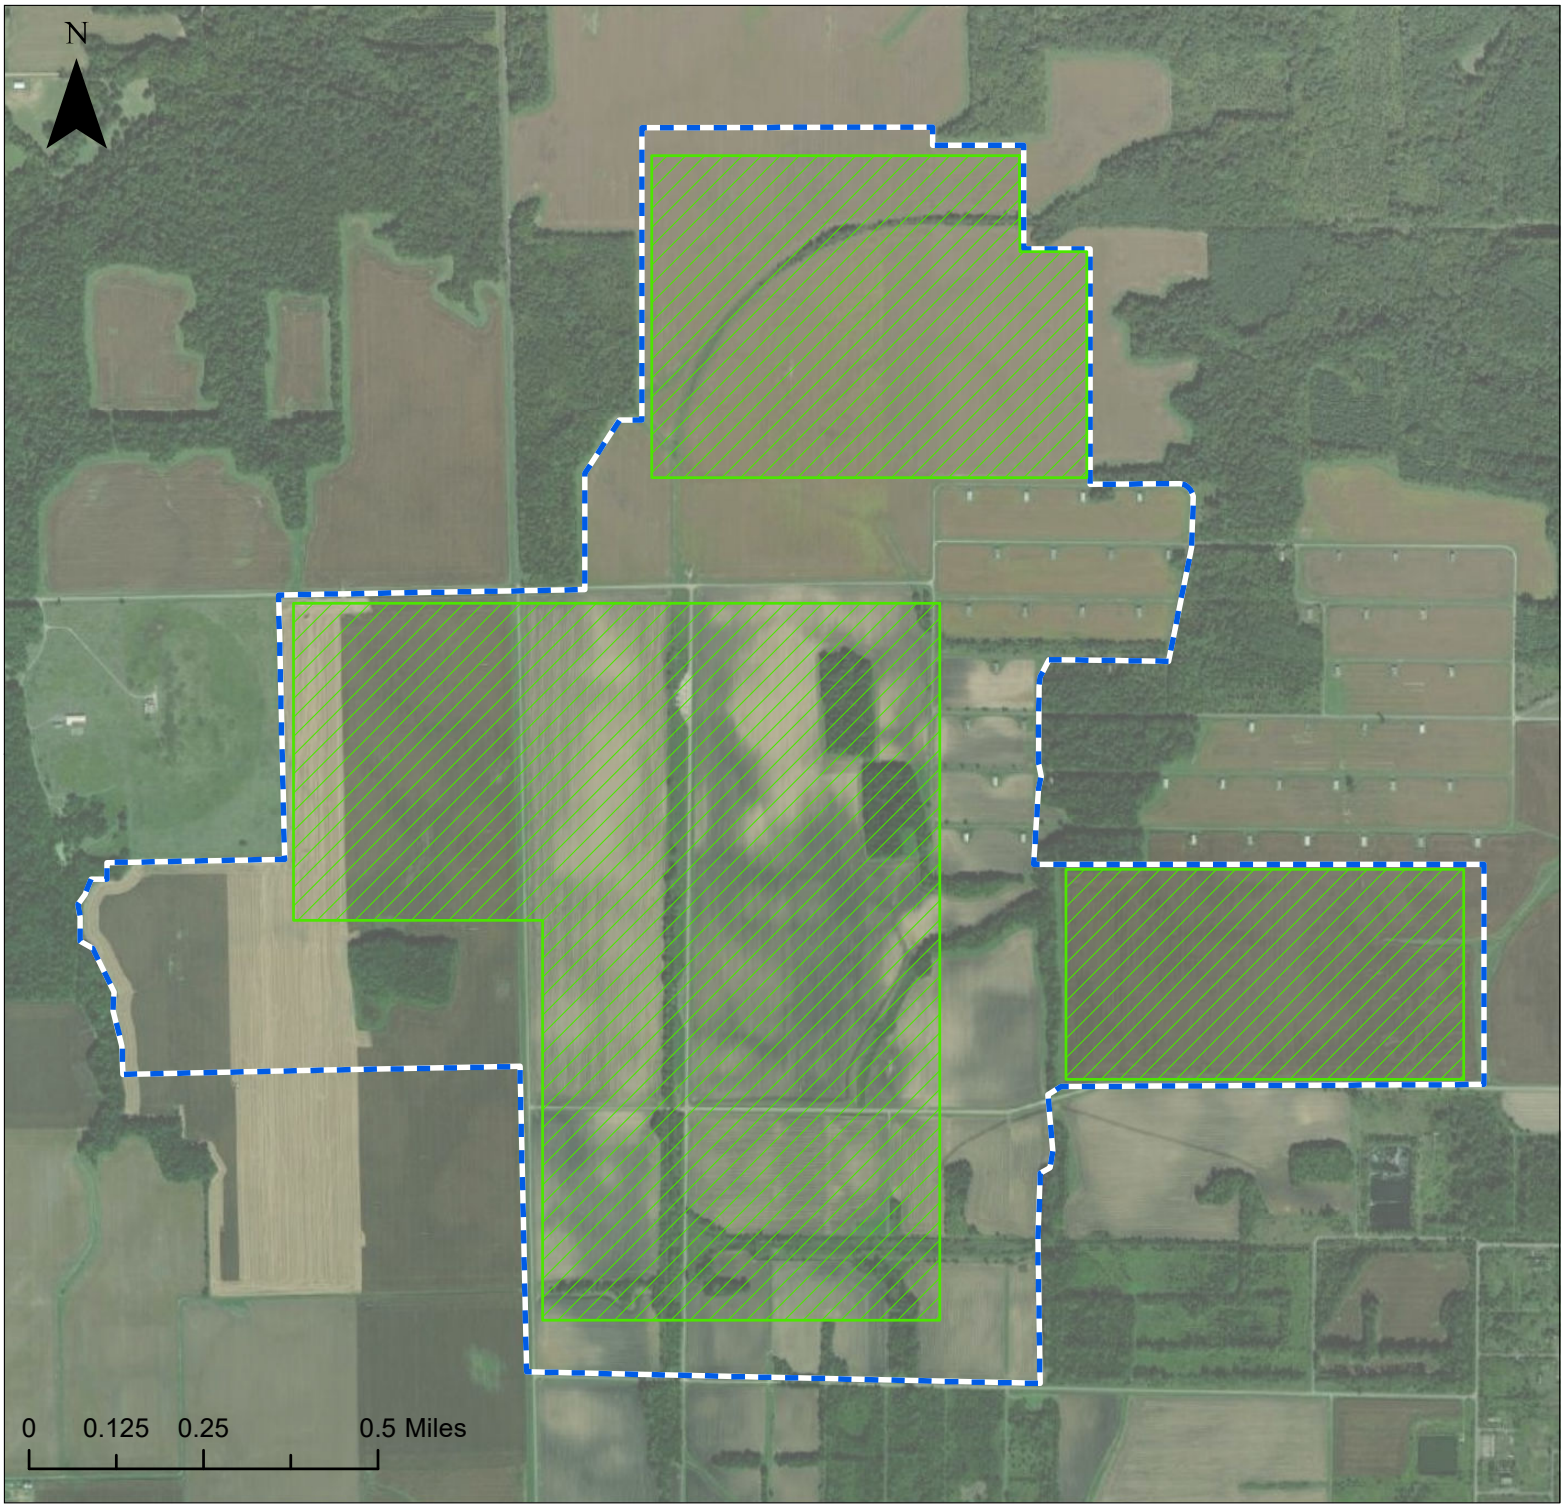

Legend

- State Highway
- SSI Phase II Study Area
- Buildable Areas

Flood Zone

- X

Potential Flood Hazard

FEMA National Flood Hazard Layer

SSI Phase II conducted by:


SSI PROGRAM

LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Vermillion County, Indiana

Site ID: 18165-027 PII Study Area (1162.7 acres)

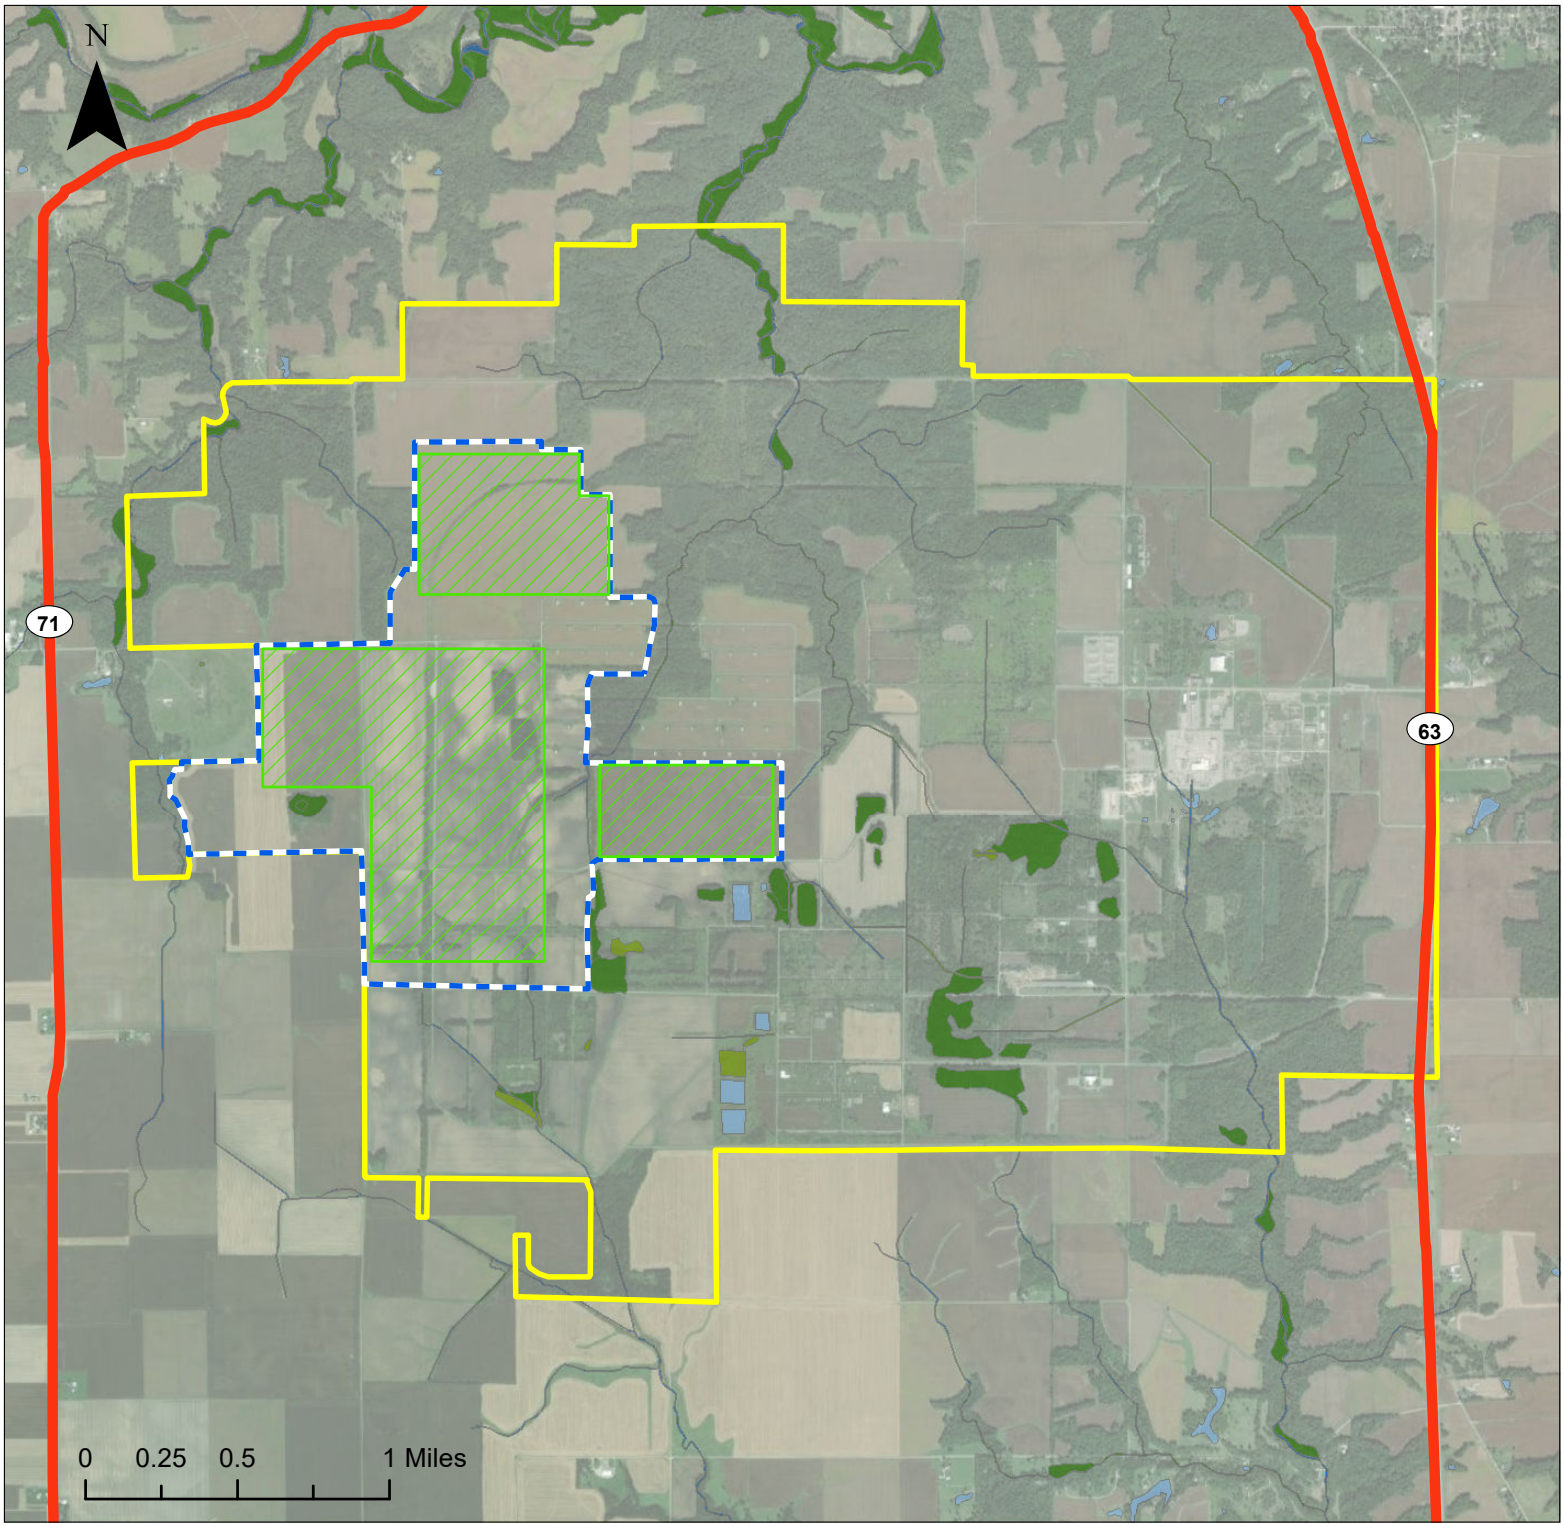

Legend

- State Highway
- Site Boundary
- SSI Phase II Study Area
- Buildable Area

National Wetlands Inventory

Potential Wetland Type

- Freshwater Emergent Wetland
- Freshwater Forested/Shrub Wetland
- Freshwater Pond
- Riverine

Potential Wetlands

USFW/USGS National Wetlands Inventory

SSI Phase II conducted by:


SSI PROGRAM

LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Vermillion County, Indiana

Site ID: 18165-027 PII Study Area (1162.7 acres)

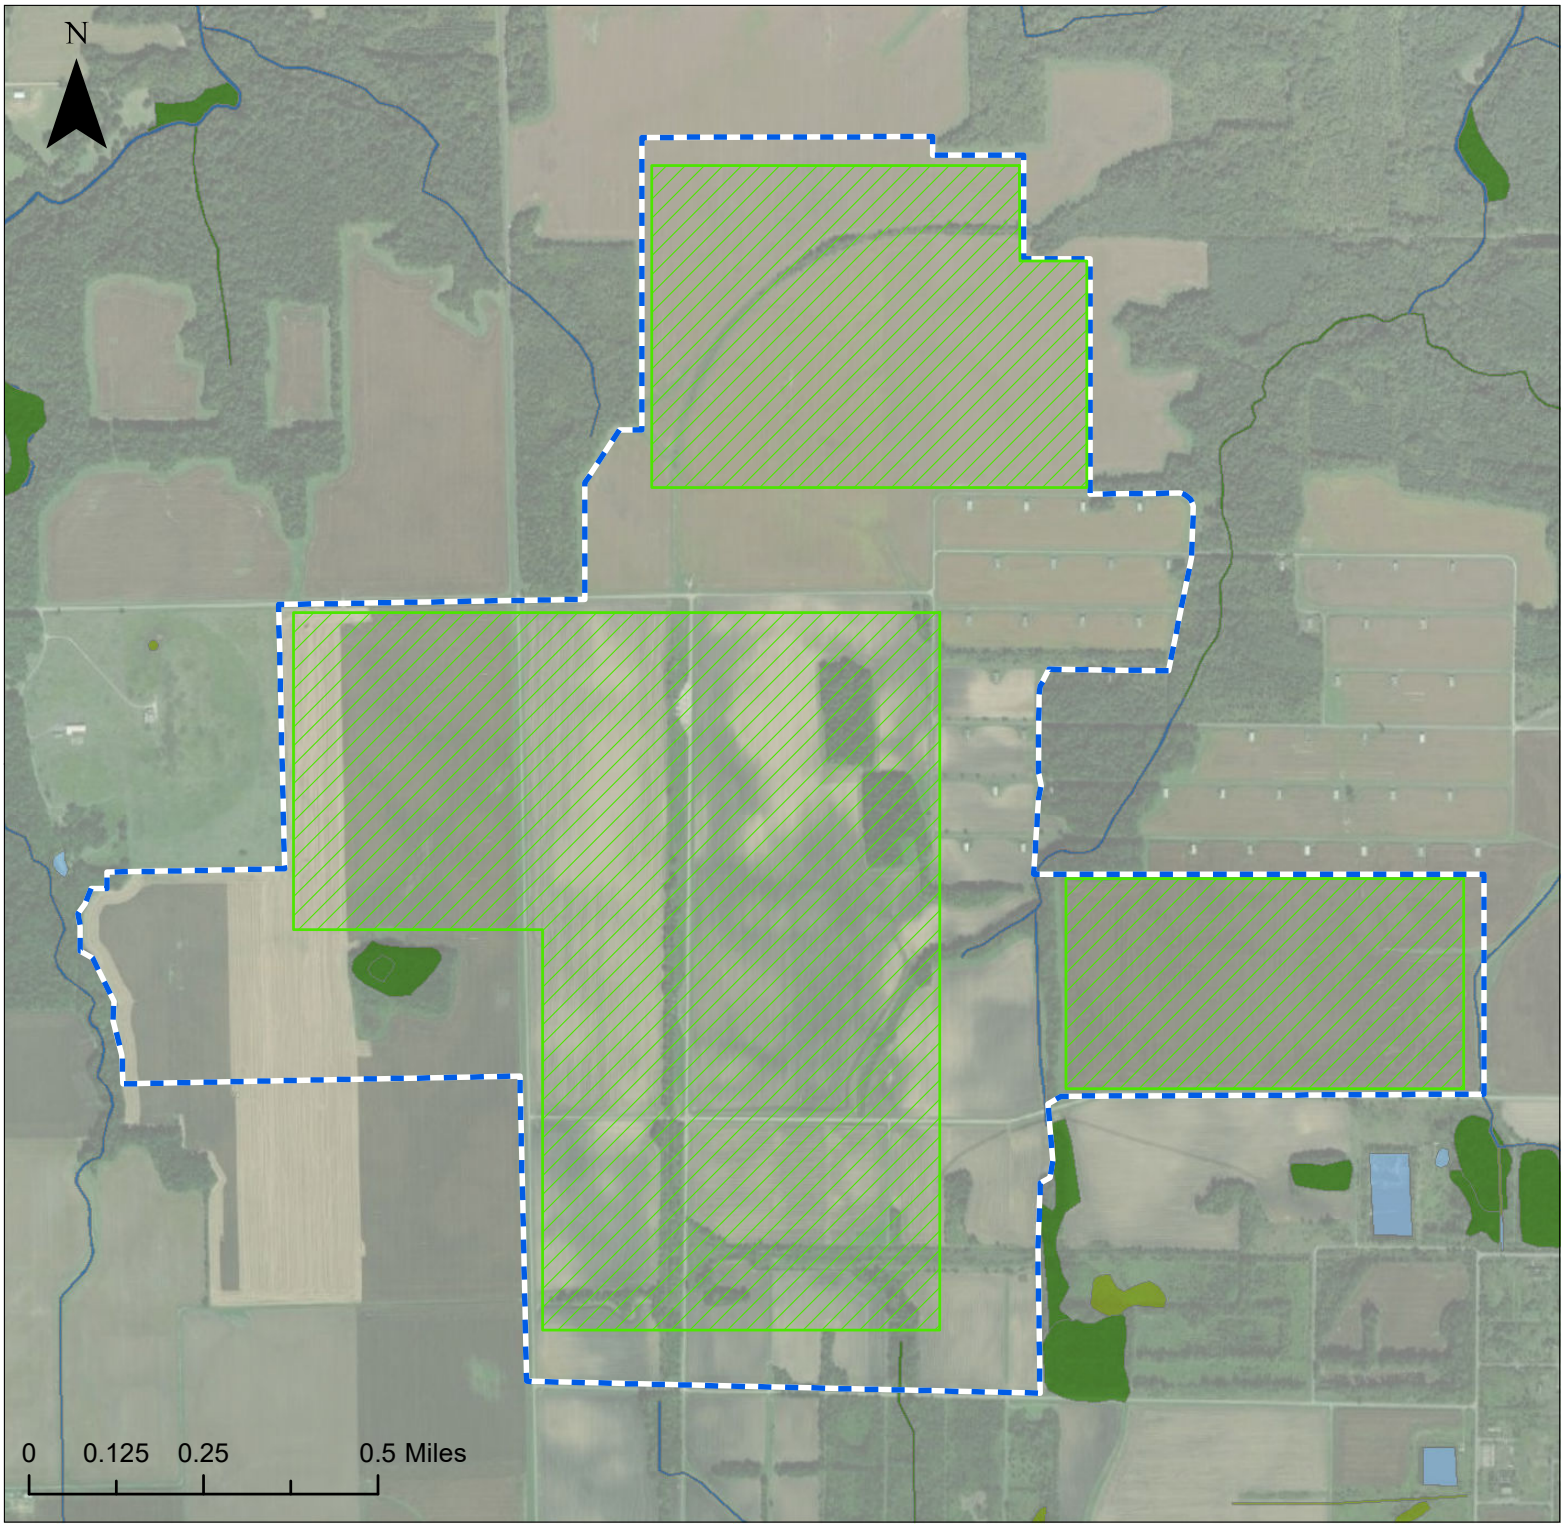

Legend

- State Highway
- SSI Phase II Study Area
- Buildable Area

National Wetlands Inventory

Potential Wetland Type

- Freshwater Emergent Wetland
- Freshwater Forested/Shrub Wetland
- Freshwater Pond
- Riverine

Potential Wetlands

USFW/USGS National Wetlands Inventory

SSI Phase II conducted by:


SSI PROGRAM

LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Vermillion County, Indiana

Site ID: 18165-027 PII Study Area (1162.7 acres)

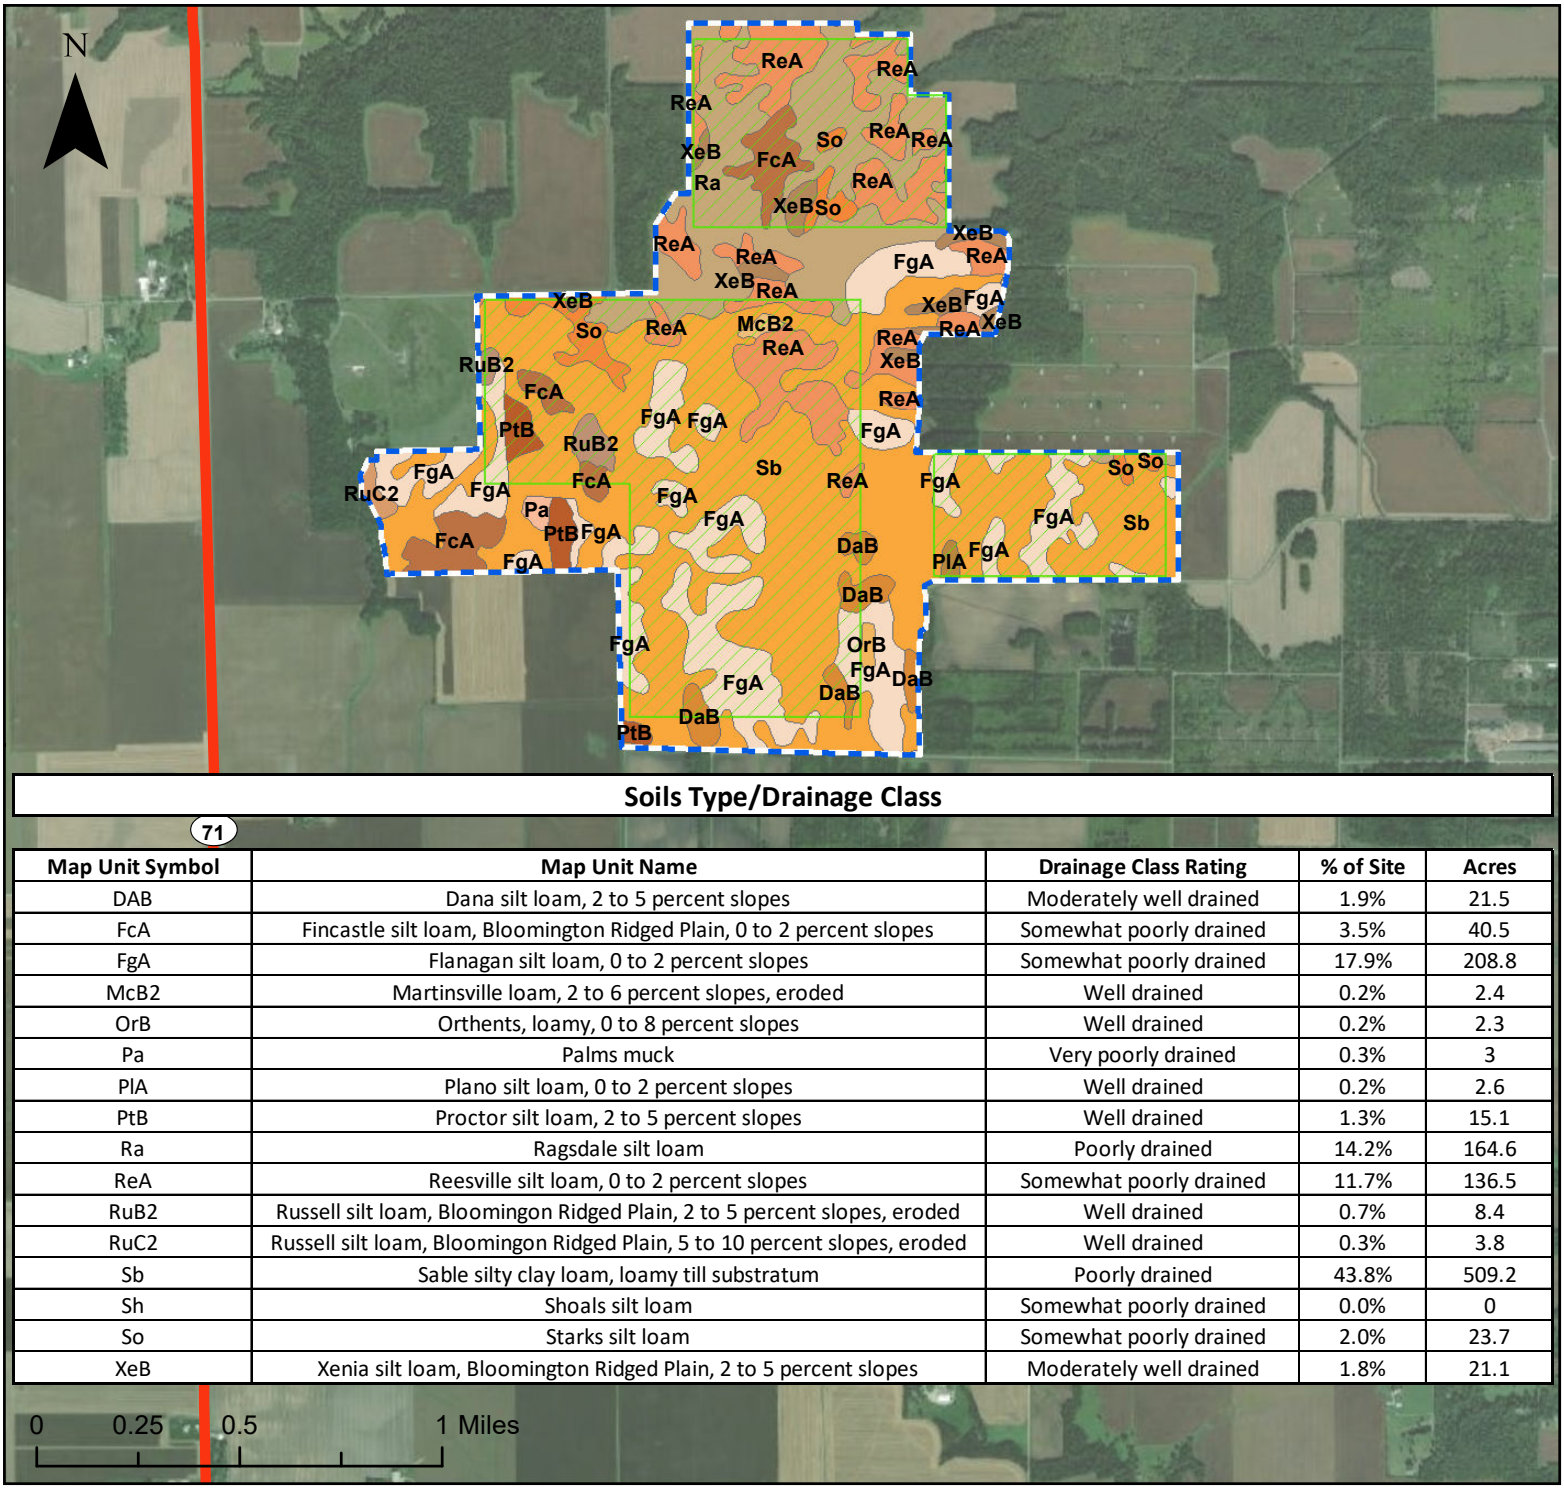

Soils Type/Drainage Class

71

Map Unit Symbol	Map Unit Name	Drainage Class Rating	% of Site	Acres
DAB	Dana silt loam, 2 to 5 percent slopes	Moderately well drained	1.9%	21.5
FcA	Fincastle silt loam, Bloomington Ridged Plain, 0 to 2 percent slopes	Somewhat poorly drained	3.5%	40.5
FgA	Flanagan silt loam, 0 to 2 percent slopes	Somewhat poorly drained	17.9%	208.8
McB2	Martinsville loam, 2 to 6 percent slopes, eroded	Well drained	0.2%	2.4
OrB	Orthents, loamy, 0 to 8 percent slopes	Well drained	0.2%	2.3
Pa	Palms muck	Very poorly drained	0.3%	3
PlA	Plano silt loam, 0 to 2 percent slopes	Well drained	0.2%	2.6
PtB	Proctor silt loam, 2 to 5 percent slopes	Well drained	1.3%	15.1
Ra	Ragsdale silt loam	Poorly drained	14.2%	164.6
ReA	Reesville silt loam, 0 to 2 percent slopes	Somewhat poorly drained	11.7%	136.5
RuB2	Russell silt loam, Bloomingon Ridged Plain, 2 to 5 percent slopes, eroded	Well drained	0.7%	8.4
RuC2	Russell silt loam, Bloomingon Ridged Plain, 5 to 10 percent slopes, eroded	Well drained	0.3%	3.8
Sb	Sable silty clay loam, loamy till substratum	Poorly drained	43.8%	509.2
Sh	Shoals silt loam	Somewhat poorly drained	0.0%	0
So	Starks silt loam	Somewhat poorly drained	2.0%	23.7
XeB	Xenia silt loam, Bloomington Ridged Plain, 2 to 5 percent slopes	Moderately well drained	1.8%	21.1

Legend

- Interstate
- State Highway
- Rail
- Buildable Areas
- Vermillion_Rise_Potential_Site

MUSYM

DaB, FcA, FgA, McB2, OrB, Pa, PlA, PtB, Ra, ReA, RuB2, RuC2, Sb, Sh, So, XeB

SSURGO SOILS

Map Unit Name, Percent Slopes

SSI Phase II conducted by:


SSI PROGRAM

LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Vermillion County, Indiana

Site ID: 18165-027 PII Study Area (1162.7 acres)

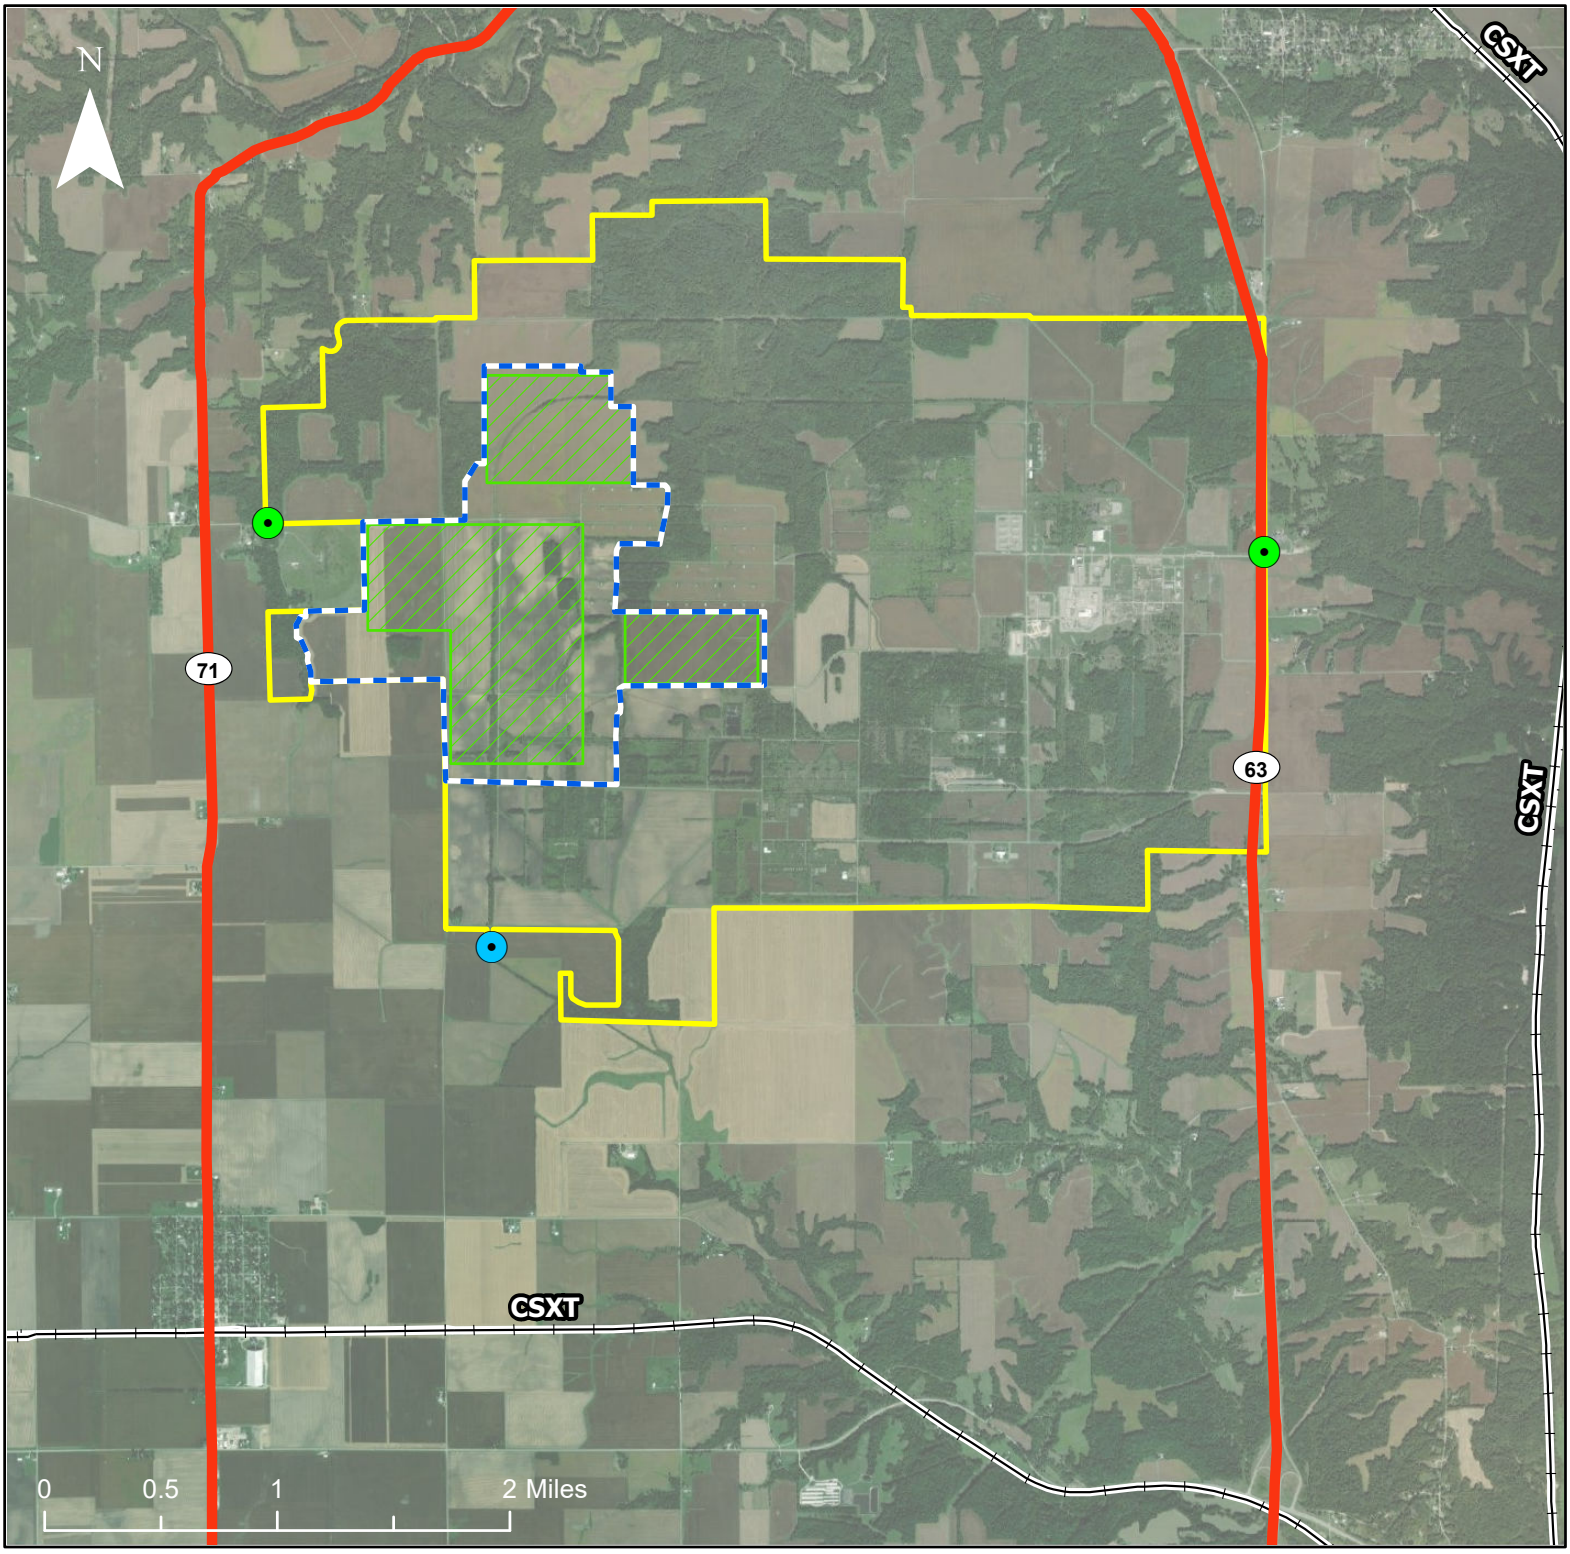

Legend

Potential Egress/Ingress Point

- Rail
- Road
- State Highway
- SSI Phase II Study Area
- Site Boundary
- Buildable Area

SITE TRANSPORTATION FEATURES

with Potential Site Access Points

SSI Phase II conducted by:


SSI PROGRAM

LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Vermillion County, Indiana

Site ID: 18165-027 PII Study Area (1162.7 acres)

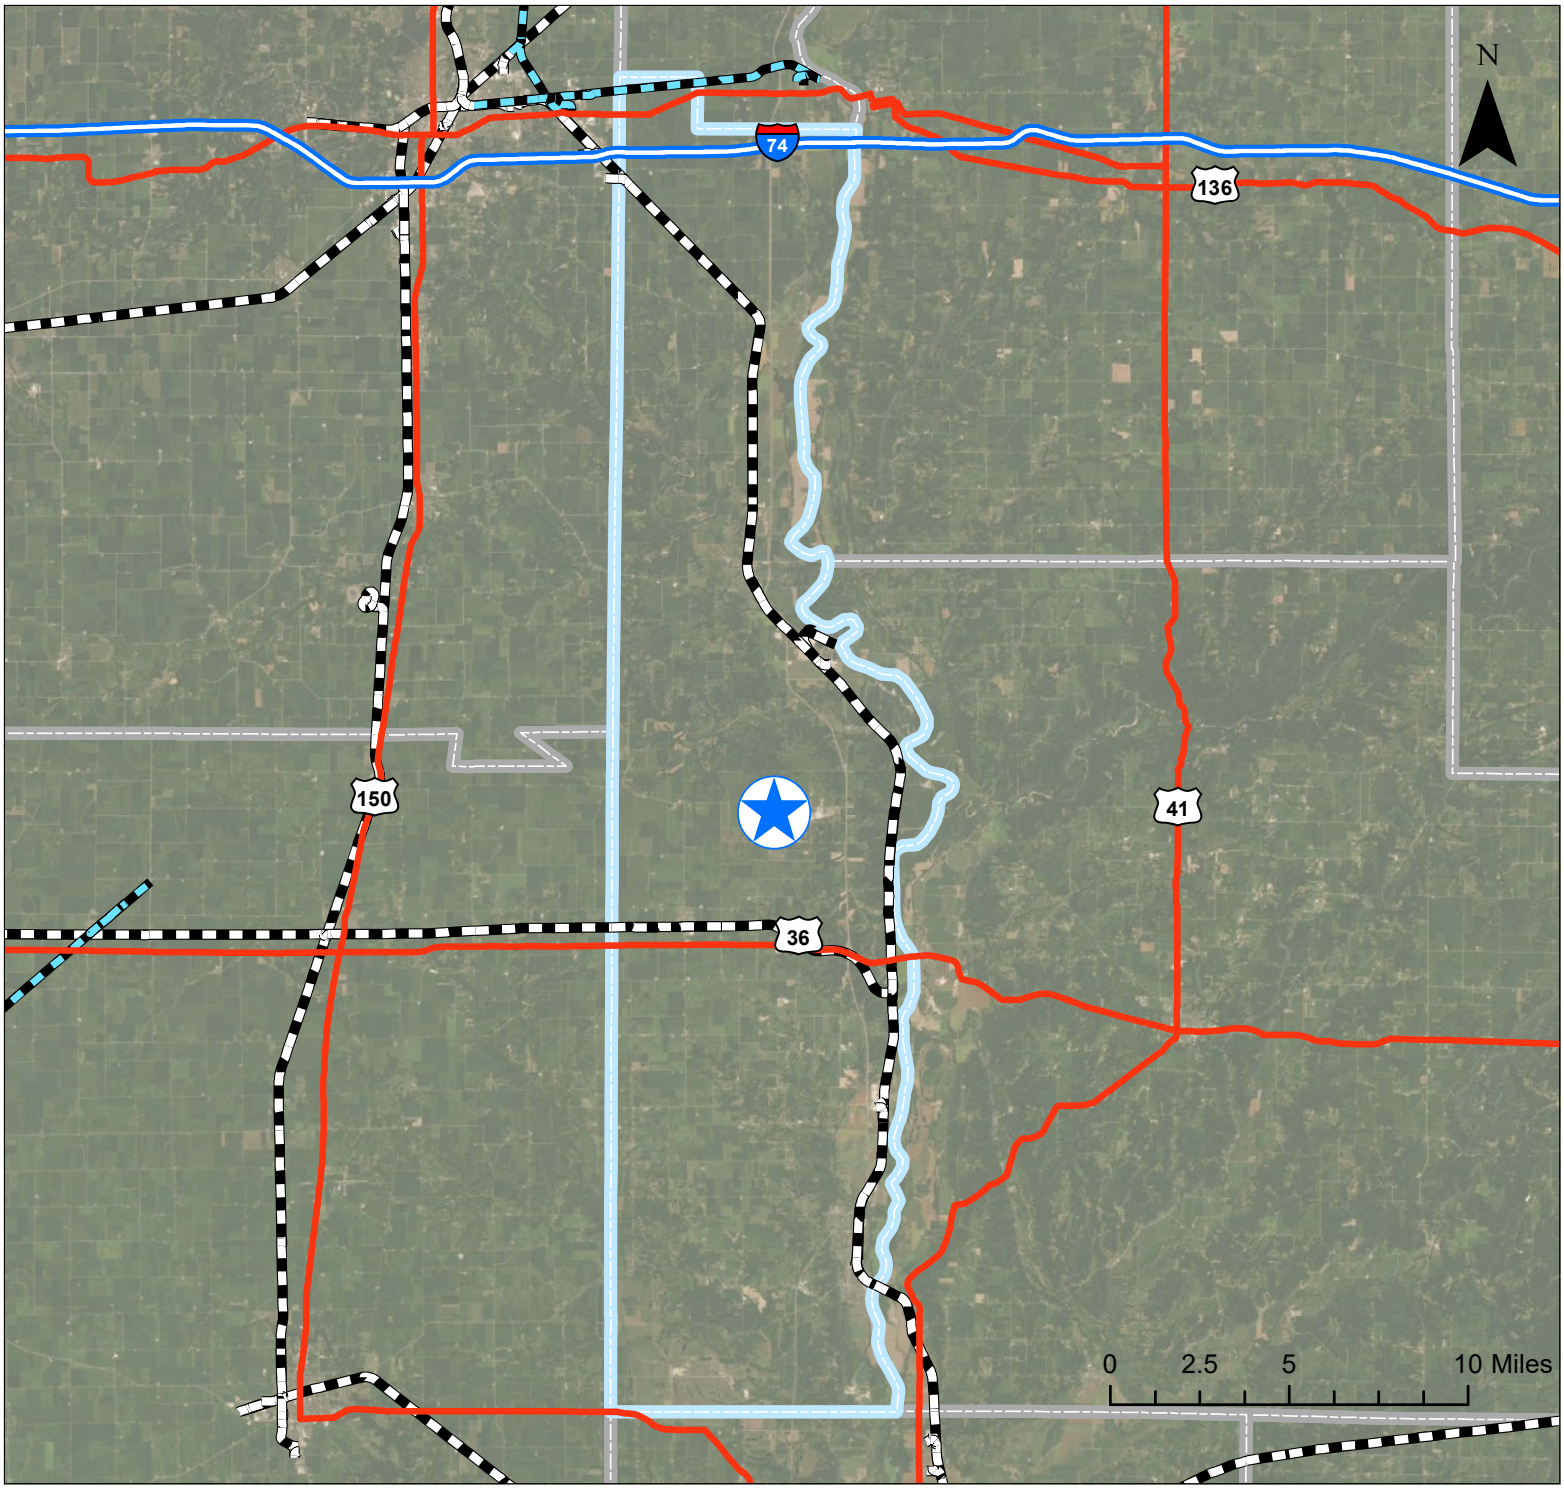

Legend

- Class I Railroad
- Shortline
- Interstate
- U.S. Highway
- Site Point
- Vermillion County
- County

SITE PRIMARY TRANSPORTATION ASSETS

SSI Phase II conducted by:


SSI PROGRAM

LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Vermillion County, Indiana

Site ID: 18165-027 PII Study Area (1162.7 acres)

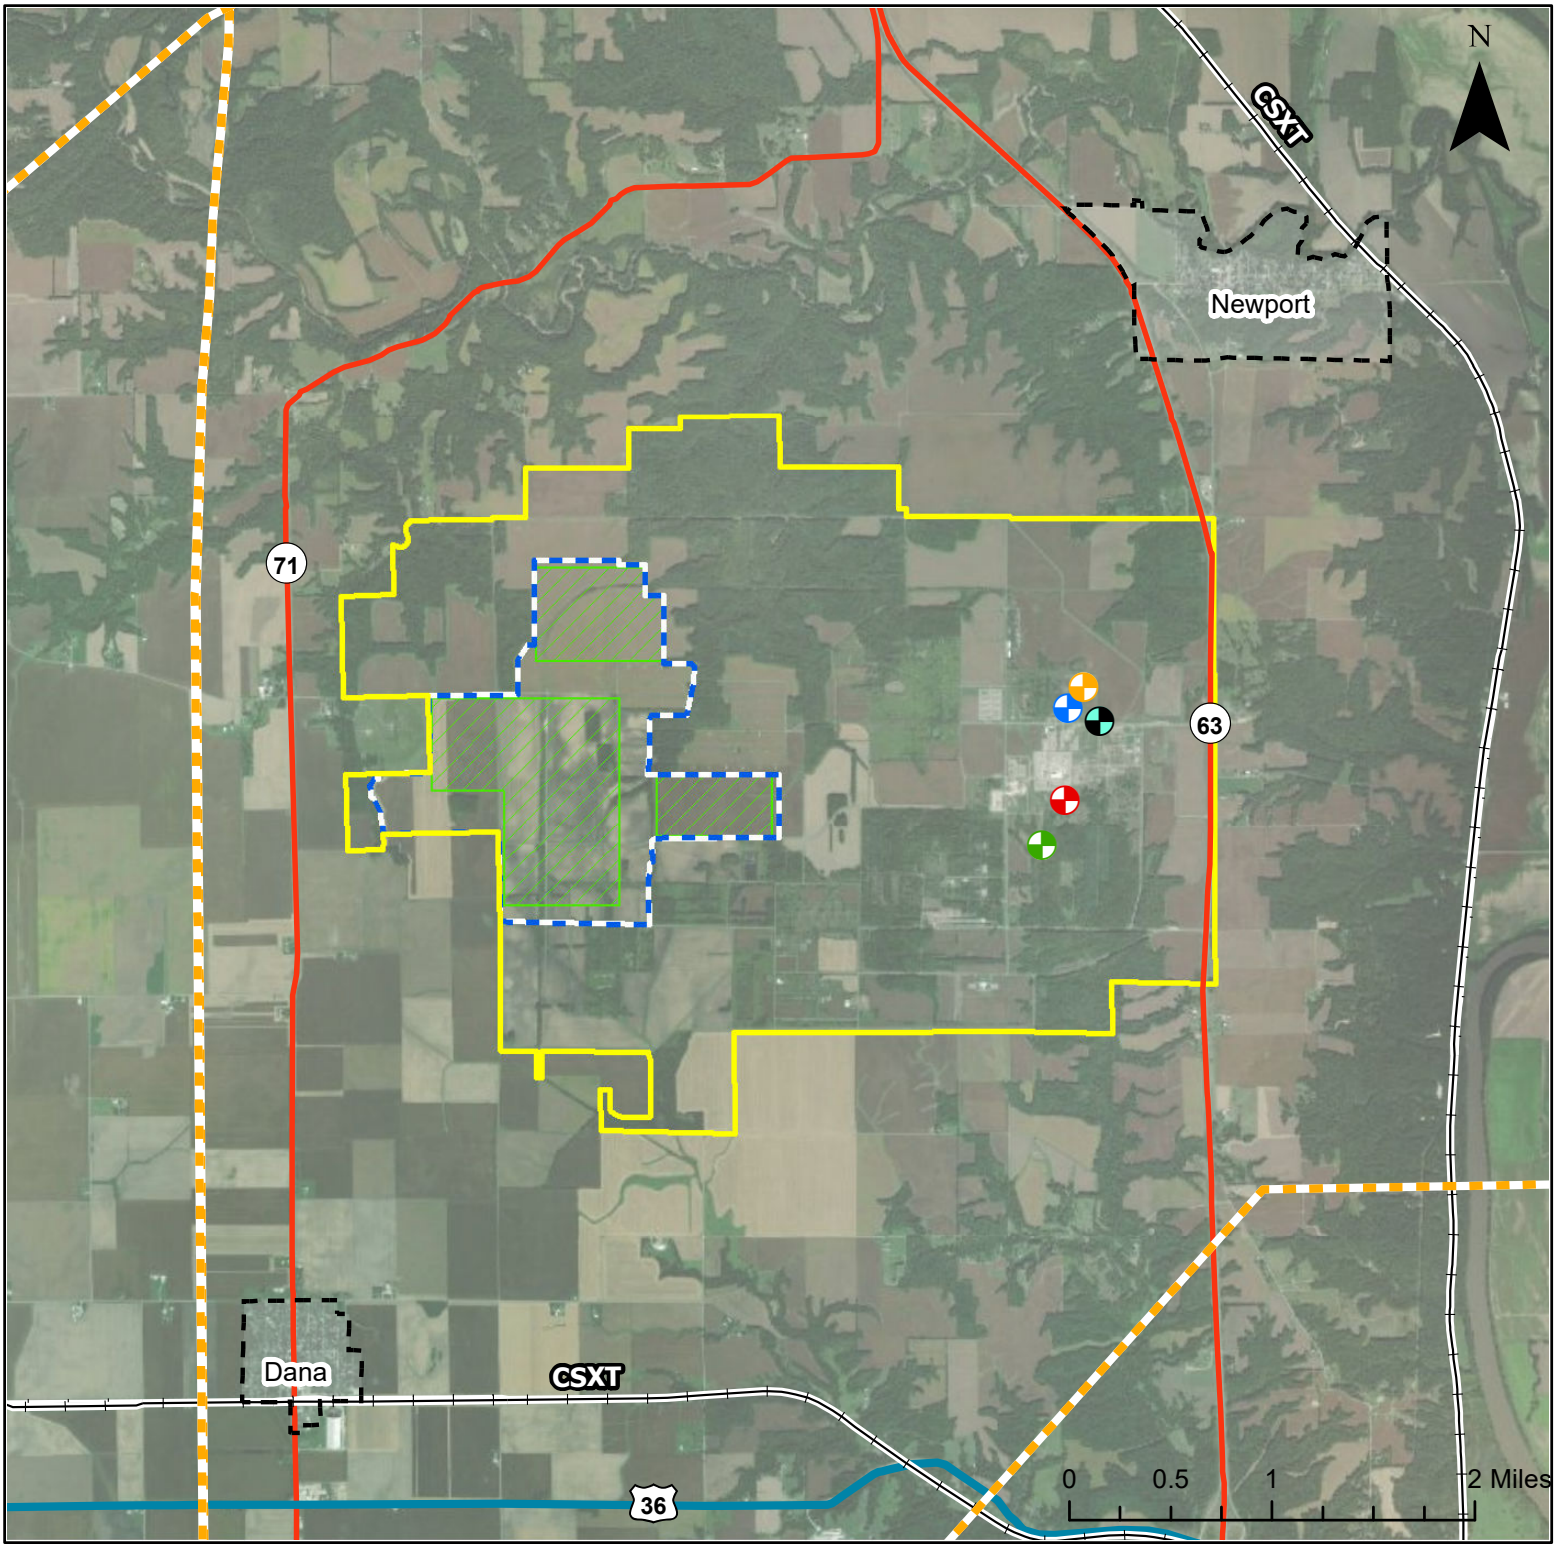

Legend

Utility Type

- 7MG Water Reservoir
- Natural Gas Reducing Station
- ATT Fiber
- Duke Energy 10.5 MVA Substation
- Waste Water Treatment Plant

- Electric Transmission Line
- U.S. Highway
- State Highway
- Rail
- Municipal Limits
- Site Boundary

- SSI Phase II Study Area
- Buildable Area

ENERGY INFRASTRUCTURE/UTILITY ACCESS

with Utility Access Point

SSI Phase II conducted by:


SSI PROGRAM

LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Vermillion County, Indiana

Site ID: 18165-027 PII Study Area (1162.7 acres)

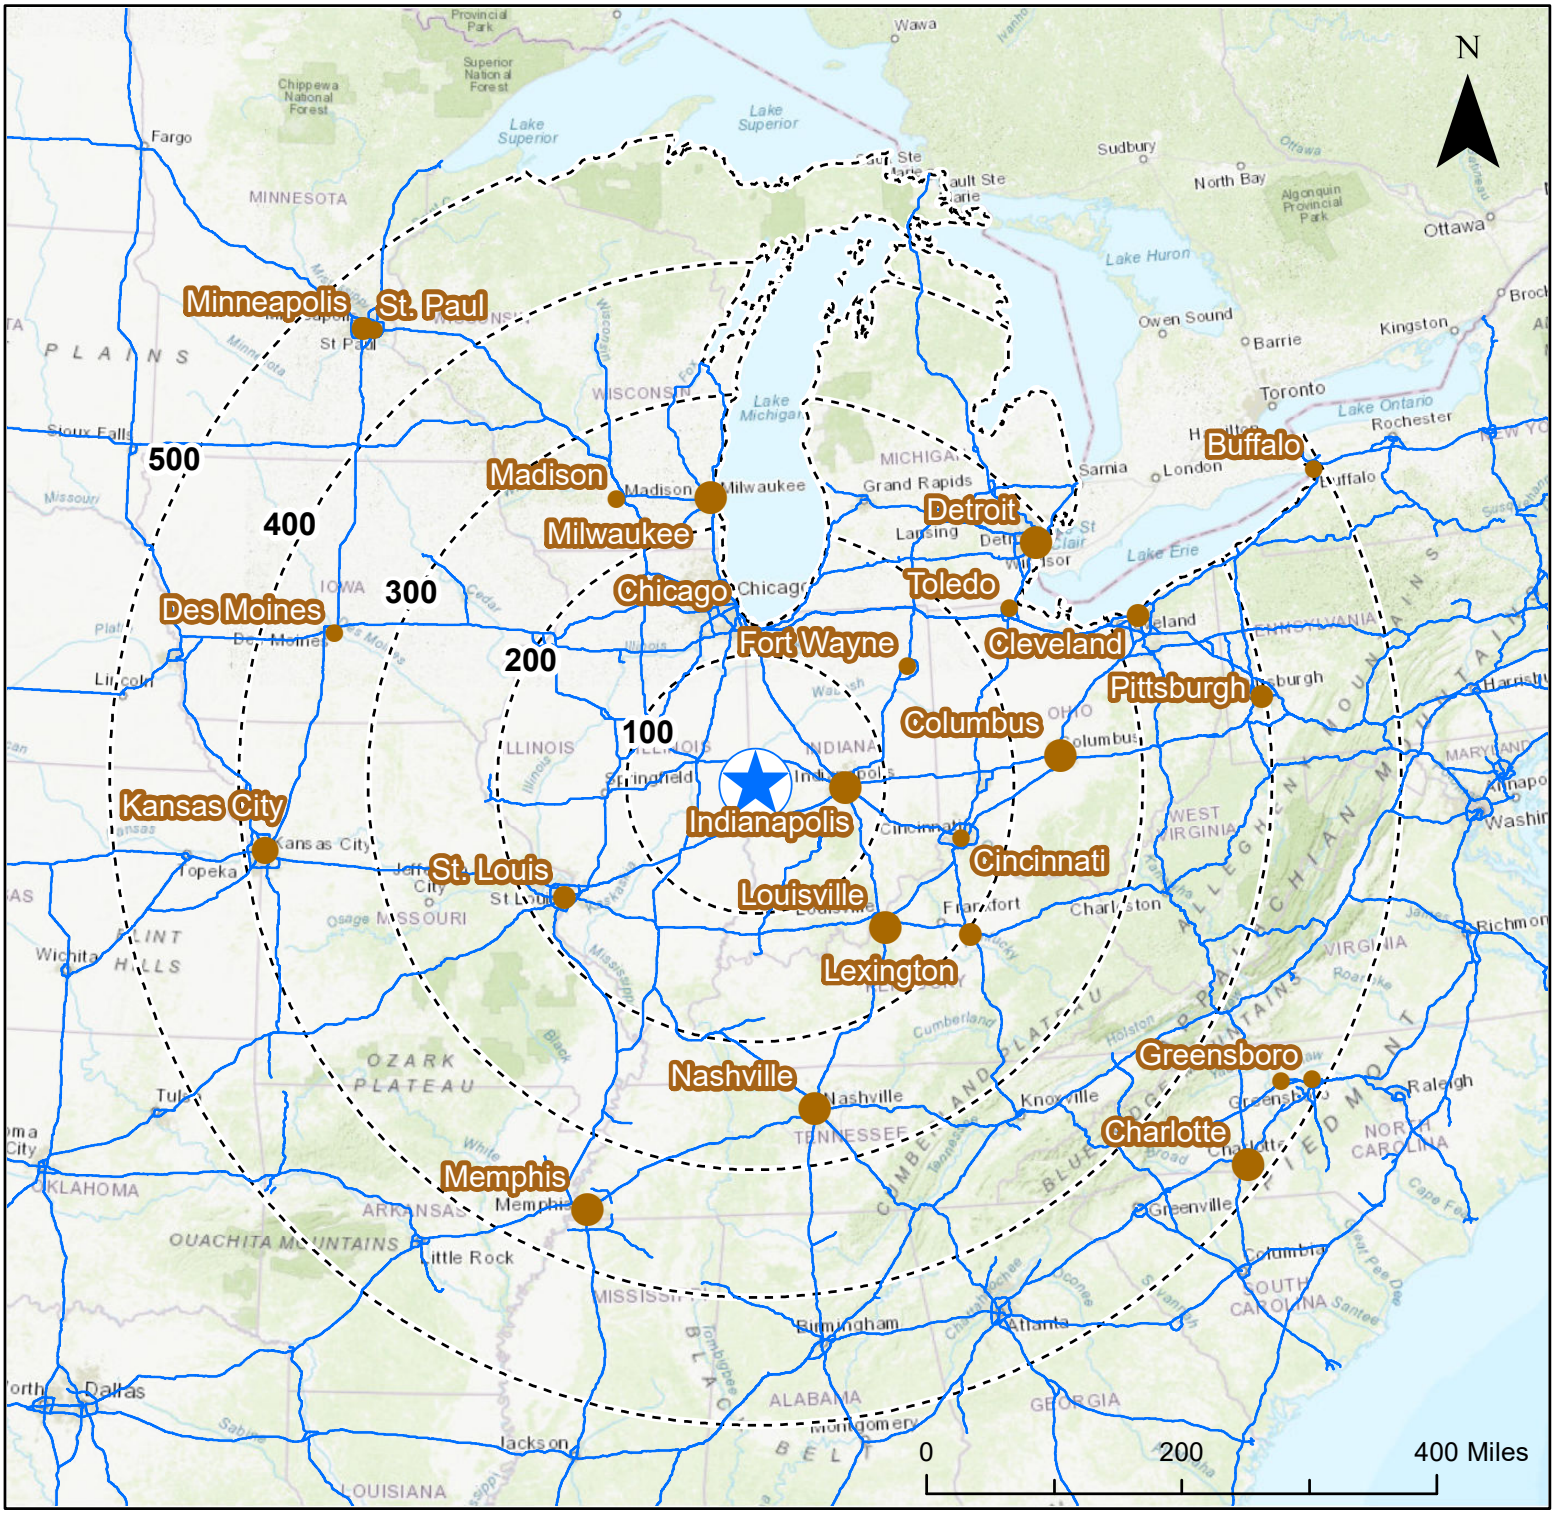

Legend

- Site Point
- Interstate
- Distance in Miles

Major Markets

Population

- <100,000
- 100,000 - 200,000
- 200,000 - 300,000
- 300,000 - 400,000
- 400,000 - 500,000
- >500,000

TRAVEL DISTANCE

Major Markets

SSI Phase II conducted by:

SSI PROGRAM


LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Vermillion County, Indiana

Site ID: 18165-027 PII Study Area (1162.7 acres)

Vermillion RISE MEGA PARK

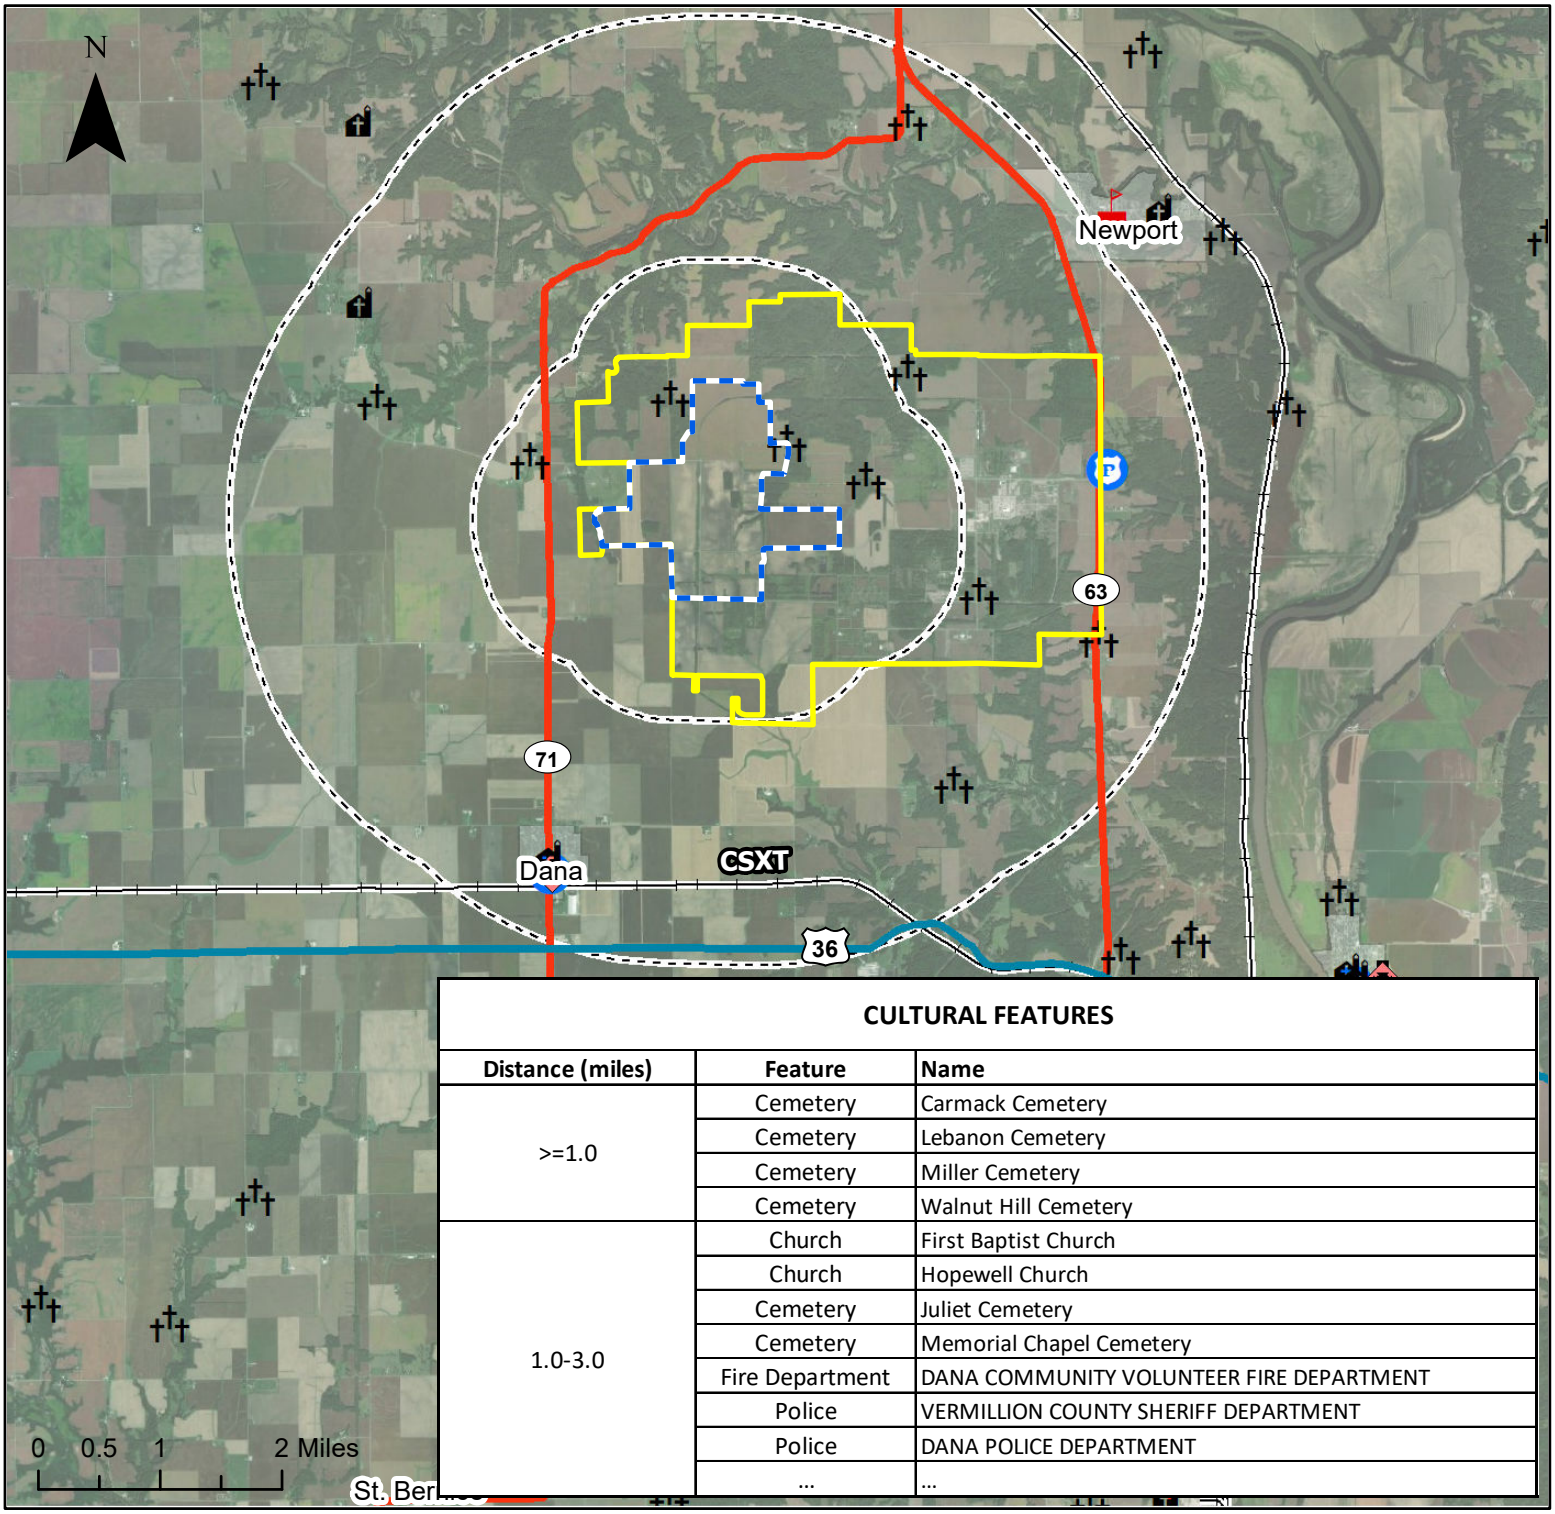

CULTURAL FEATURES

Distance (miles)	Feature	Name
>=1.0	Cemetery	Carmack Cemetery
	Cemetery	Lebanon Cemetery
	Cemetery	Miller Cemetery
	Cemetery	Walnut Hill Cemetery
1.0-3.0	Church	First Baptist Church
	Church	Hopewell Church
	Cemetery	Juliet Cemetery
	Cemetery	Memorial Chapel Cemetery
	Fire Department	DANA COMMUNITY VOLUNTEER FIRE DEPARTMENT
	Police	VERMILLION COUNTY SHERIFF DEPARTMENT
	Police	DANA POLICE DEPARTMENT
	...	...

Legend

- Site Boundary
- U.S. Highway
- State Highway
- Rail
- Distance in miles
- Municipal Limits
- Police Station
- Fire Rescue/EMS
- Hospital
- School
- Cemetery
- Church

CULTURAL FEATURES

within 1.0 and 3.0 Miles of Site

SSI Phase II conducted by:


SSI PROGRAM

LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Vermillion County, Indiana

Site ID: 18165-027 PII Study Area (1162.7 acres)

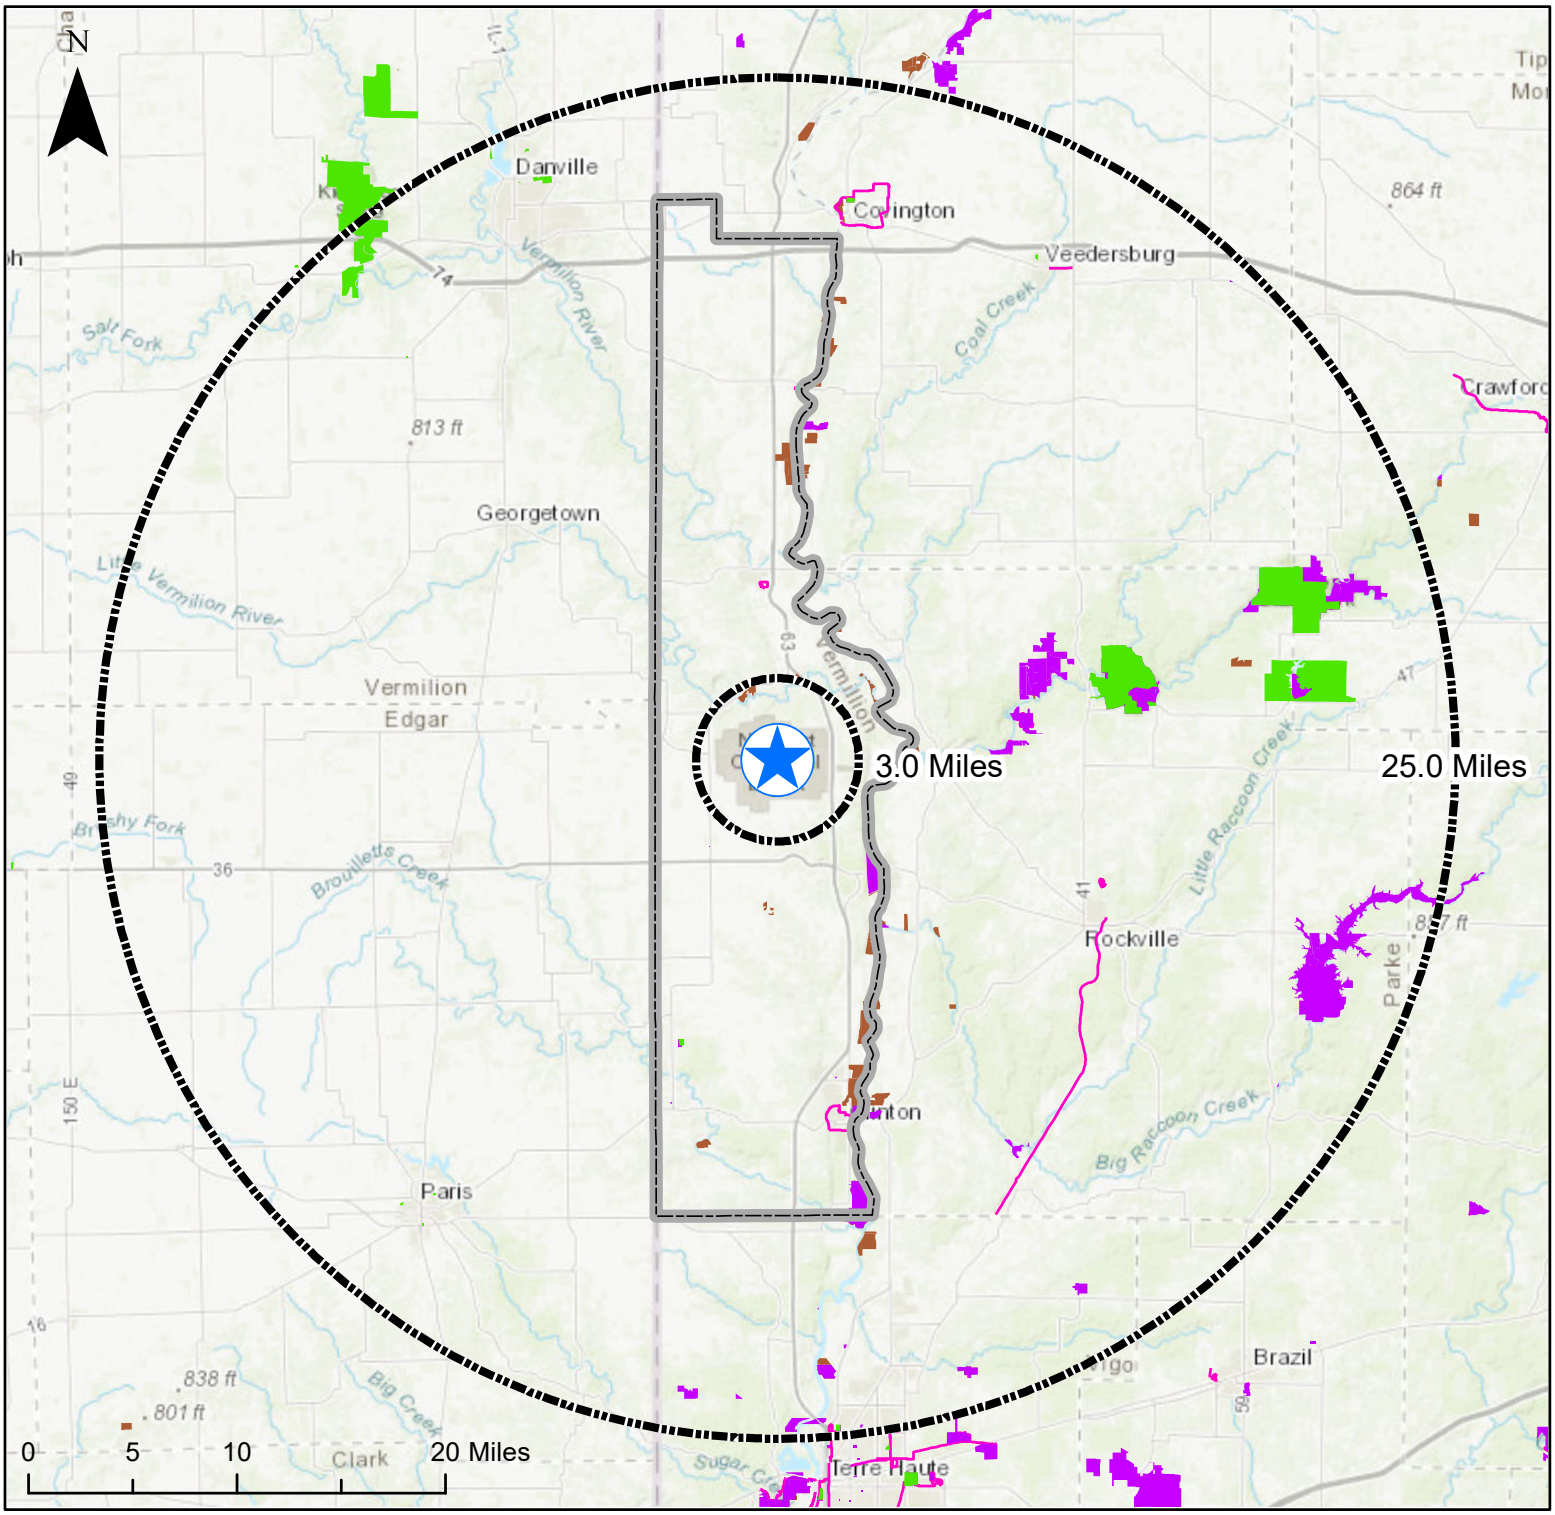

Legend

- Site Point
- IDNR Trails
- Distance in Miles
- Vermillion County
- Local/State Parks
- National Forests
- INDR Managed Lands
- Conservation Easements

FEDERAL, STATE, AND LOCAL PARKS AND PROTECTED AREAS

within 3.0 and 25.0 Miles of Site

SSI Phase II conducted by:


SSI PROGRAM

LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Vermillion County, Indiana

Site ID: 18165-027 PII Study Area (1162.7 acres)

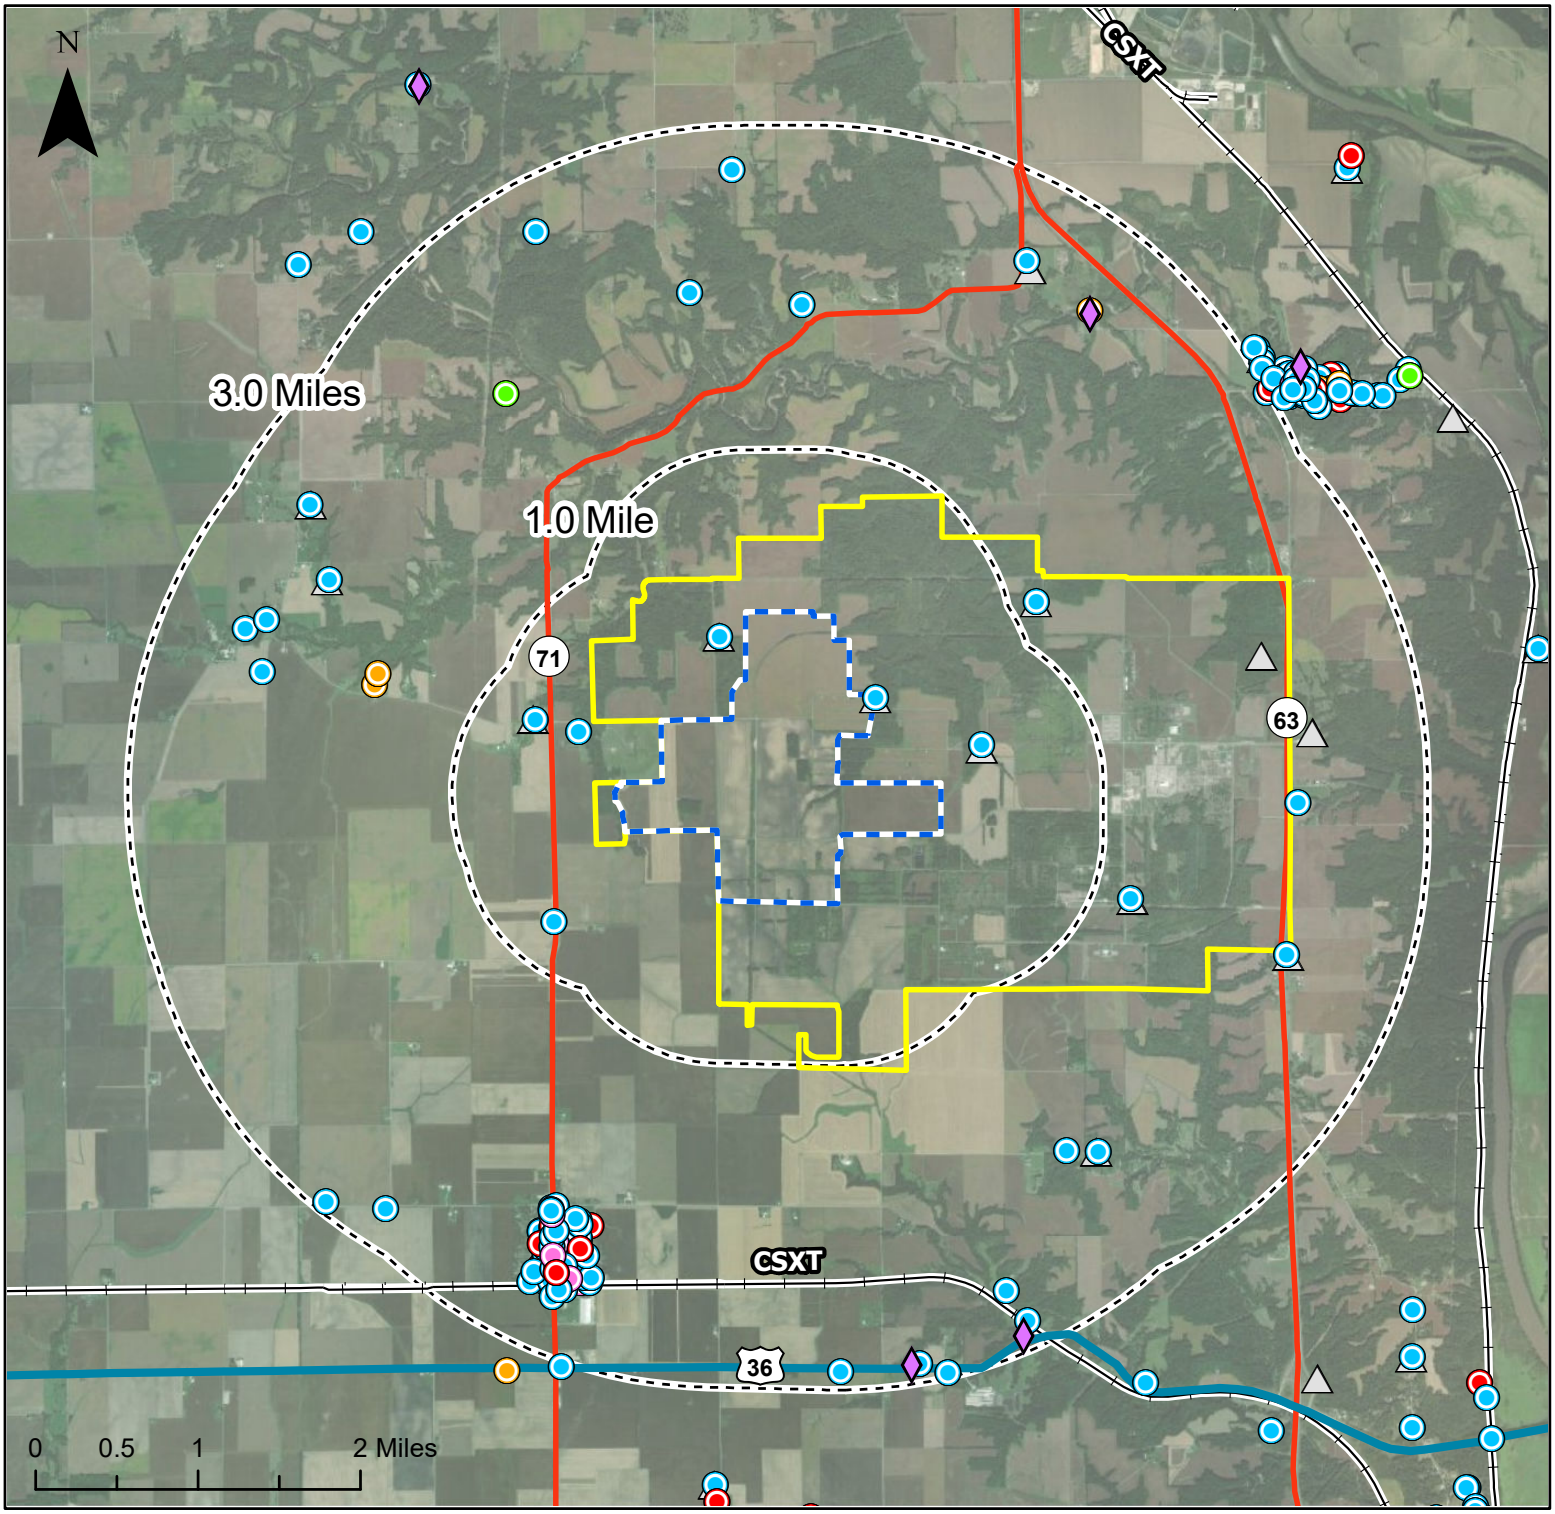

Legend

- Demolished
- Non-Contributing
- Contributing
- Notable
- Outstanding
- Historic Bridge
- Cemetery
- U.S. Highway
- State Highway
- Rail
- SSI Phase II Study Area
- Site Boundary
- Distance in miles

HISTORIC RESOURCES

within 1.0 and 3.0 Miles of Site

SSI Phase II conducted by:

SSI PROGRAM

LEOTTA LOCATION + DESIGN