
Study conducted for:

New Castle
Henry County
Economic Development
Corporation

Study funded by:

HOOSIERENERGY

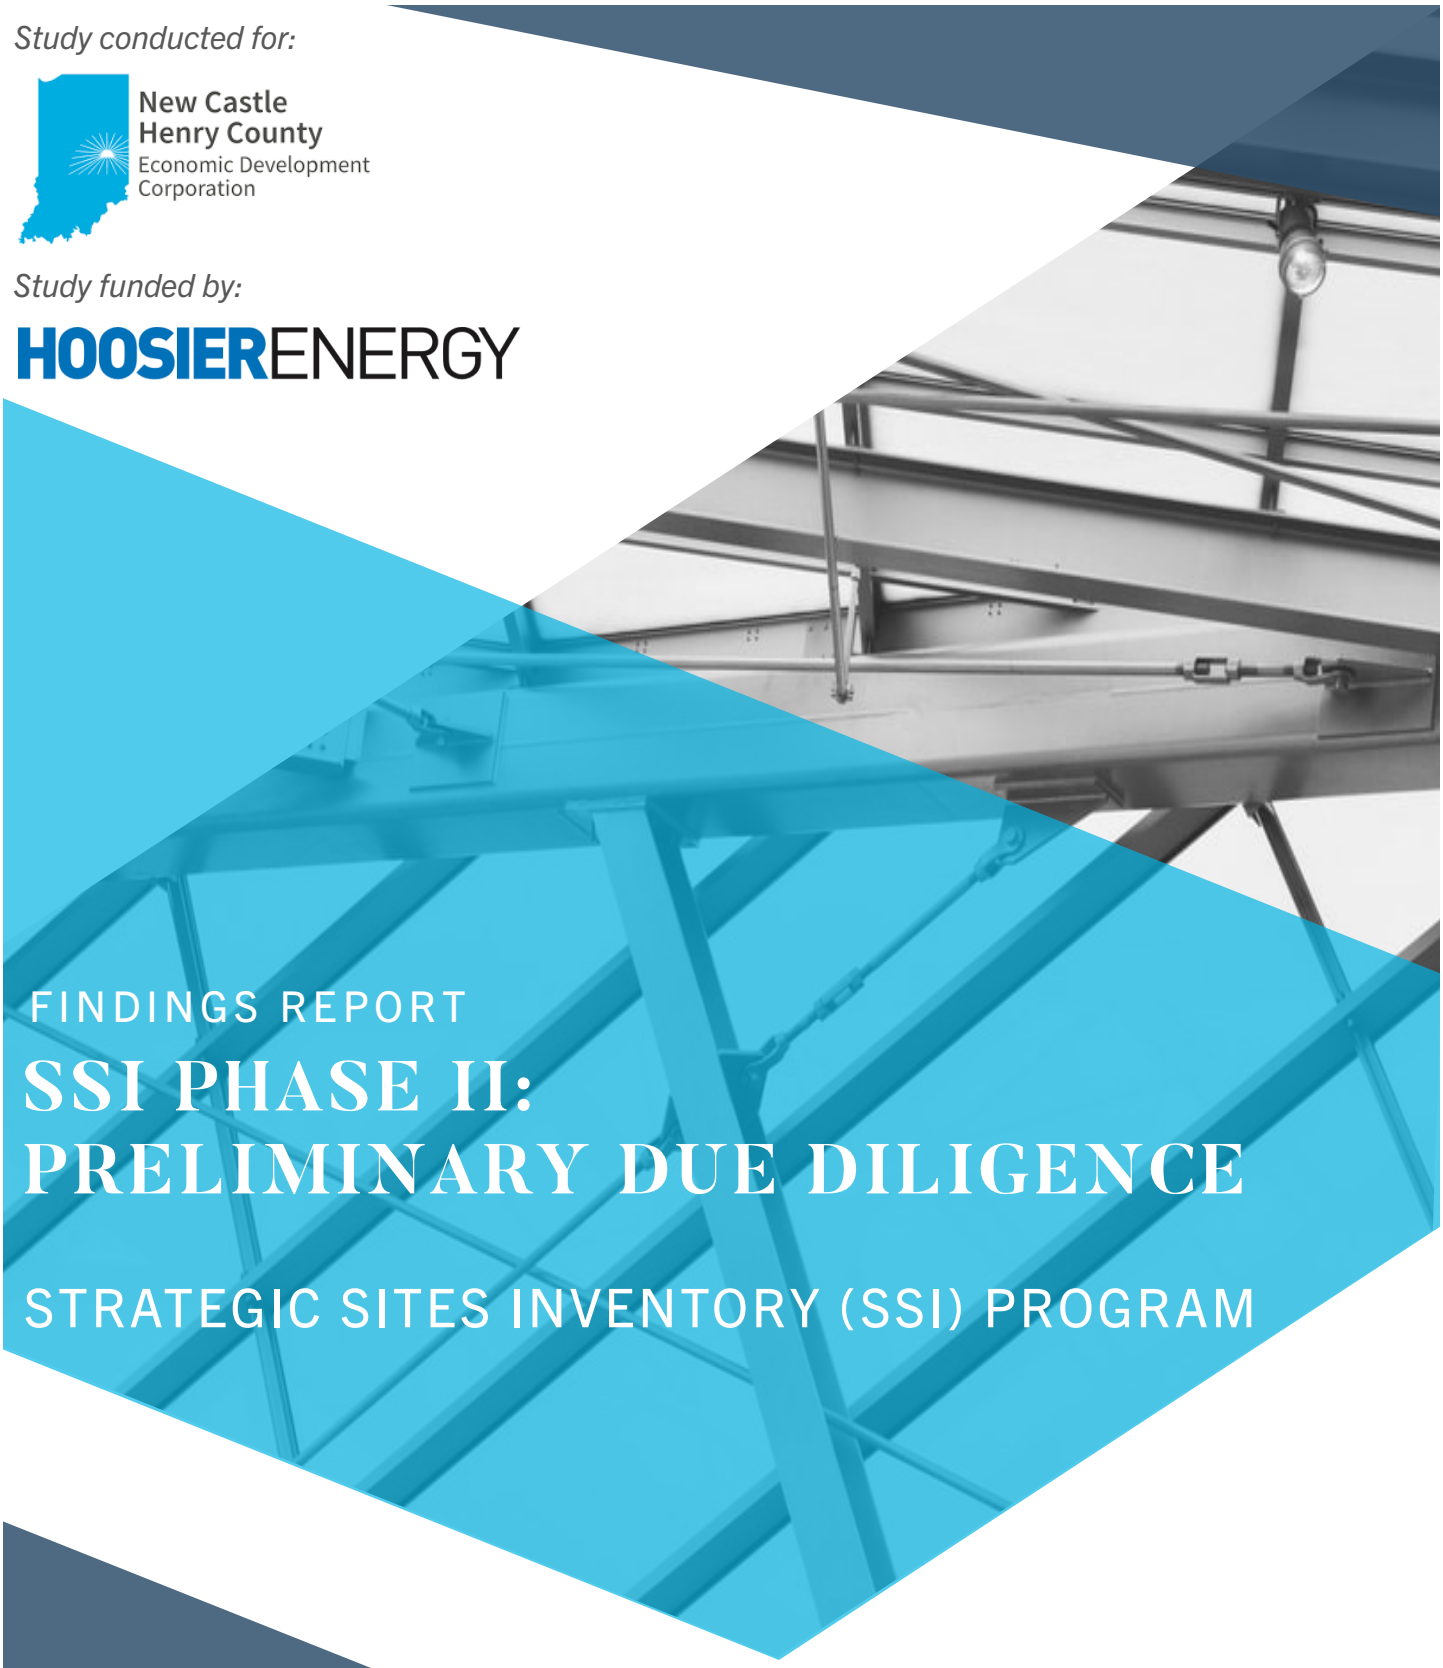

FINDINGS REPORT

SSI PHASE II: PRELIMINARY DUE DILIGENCE

STRATEGIC SITES INVENTORY (SSI) PROGRAM

June 12, 2023

Site ID: 18065-040

Henry County, IN

Study conducted by:

LEOTTA
LOCATION + DESIGN

Findings Report

TABLE OF CONTENTS

Section Page

Introduction 2

Site Description 4

Geographic Location 4

Current Ownership 5

Findings Summary 5

Condition 5

Size and Configuration 6
Elevation/Topography 6
Land Cover 7
Hydrography and Flood Risk 9
Potential Wetlands 9
Soils 10
Sinkholes 11
Zoning and Land Use 12
Threatened and Endangered Species 13
Legacy Environmental Concerns 14

Connection 16

Transportation Assets 16
Access 16
Truck Routes 16
Railroads 17
Airport 17
Seaport 17

Section Page

Utility Infrastructure **17**
Potable Water 18
Sewer/Wastewater 18
Natural Gas 19
Electric 19
Telco/Broadband 19
Major Market Areas **19**

Community **20**
Description of the Economy **20**
Demographics **21**
Employment and the Economy and Income **21**
Population/Workforce **21**
Cultural Features **22**
Schools 22
Churches 22
Cemeteries 22
Group Care Centers 22
Other Cultural Centers 22
Parks and Protected Lands 23
Correctional Facilities 23
Fire Protection/EMS 23
Law Enforcement 23
Hospital/Emergency Care 23
Historical Preservation **23**
Education and Technical Training Assets **25**
Business Climate **27**
Political Climate **28**

Site Competitiveness Metrics Summary 28
Site Competitiveness Report Card 28
Rough Order-of-Magnitude Site Development Cost Summary 30
Site Competitiveness Opinion 32
Subject Site Key Facts 33

Purpose and Use of Study 34
Purpose 34
Use 34
Site Advancement Decision 34
Site Improvement Investment Consideration 34
Site Marketing 35

Warranty 35

Appendices

Reference

Site Maps ..... A
About the Strategic Sites Inventory (SSI) Program ..... B
Site Parcel Ownership C
Henry County Development Code, Nearby Zoning Map, Rezoning Request, Various Permits ..... D
IPaC Trust Resources ..... E
2018 Henry County Comprehensive Plan (Relevant Excerpts) ..... F
USDA, NRCS SSURGO Soils Report for Drainage Class and Small Commercial Buildings ..... G
EDR Radius Report and Historical Aerial Imagery ..... H
ESRI Business Summary I
SSI Phase II Questionnaire ..... J
SHAARD Report, Indiana Code 14-21-1 Relevant Sections, Indiana Archaeology Law Q&A ..... K
County-Provided Utility Infrastructure Information L

List of Maps (Appendix A)

Site Map
Vicinity Map
Site Parcel Configuration
Elevation/Slope
Land Cover
Potential Flood Hazard
NWI Potential Wetlands
SSURGO Soils
Site Access
Transportation Infrastructure
Energy Infrastructure/Utility Access
Travel Distance Major Markets
Cultural Features
Federal, State, and Local Parks and Protected Areas
Historic Resources

Strategic Sites Inventory (SSI) Program
Phase II: Preliminary Due Diligence

Dishman Rothrock Site
Henry County, Indiana
Site ID: 18065-040

SSI QUALIFIED SITE

Size and Location
Site: 94.3 acres
Buildable Area: 87.1 acres
577 E County Rd 400 S
New Castle, IN


Lat. 39.8703 Long. -85.3741


Current Ownership
Henry County RDC


Highest and Best Use
Light Industrial
Advanced Manufacturing

Site GPA
3.8

Legend
- Site Location
- Rail
- Limited Access
- Major Highway
- State Highway
- Site Boundary
- Buildable Area
- County Boundary
- County Boundary

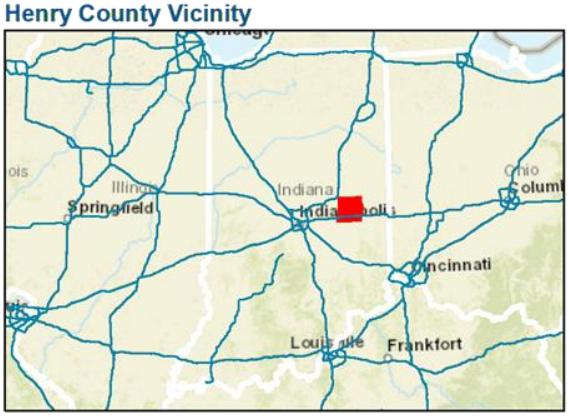Henry County Vicinity

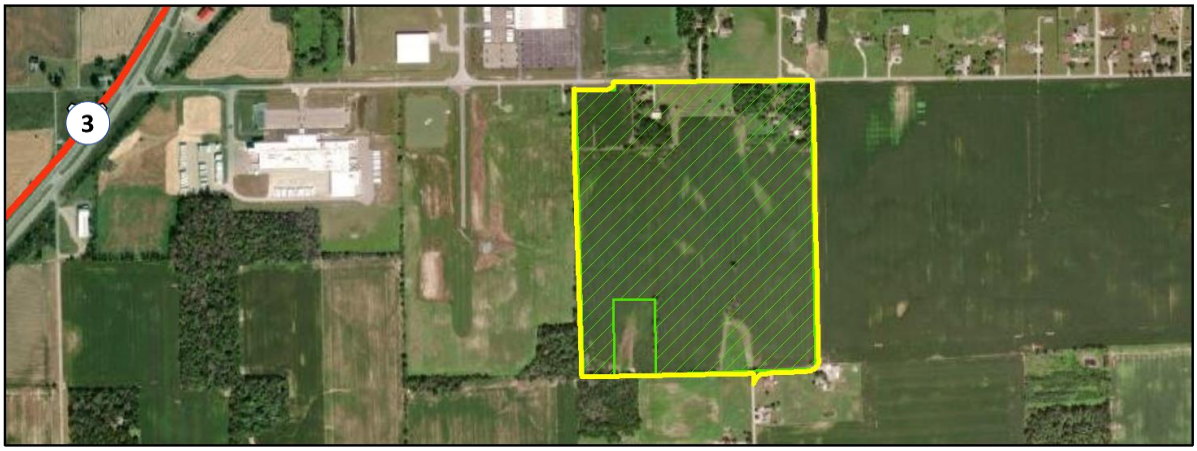

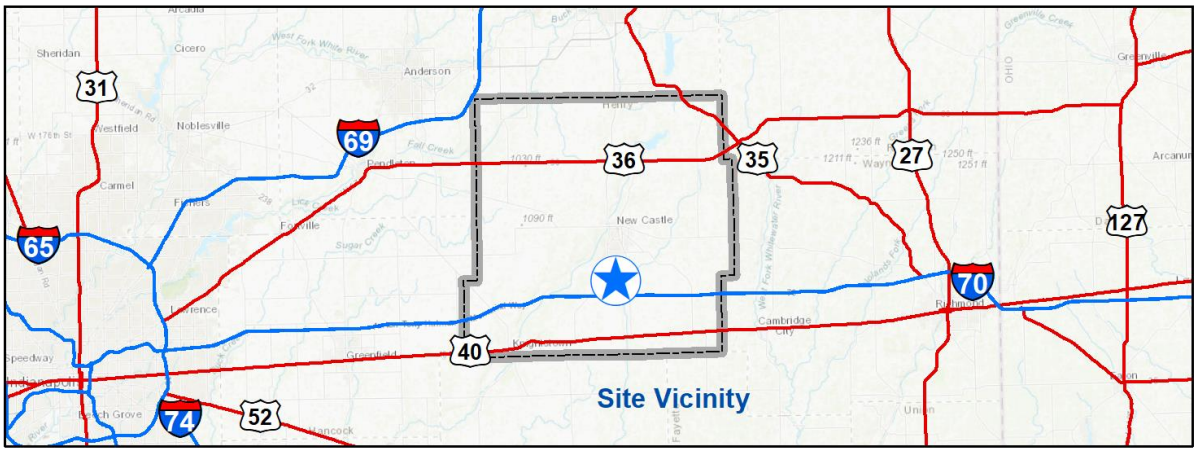
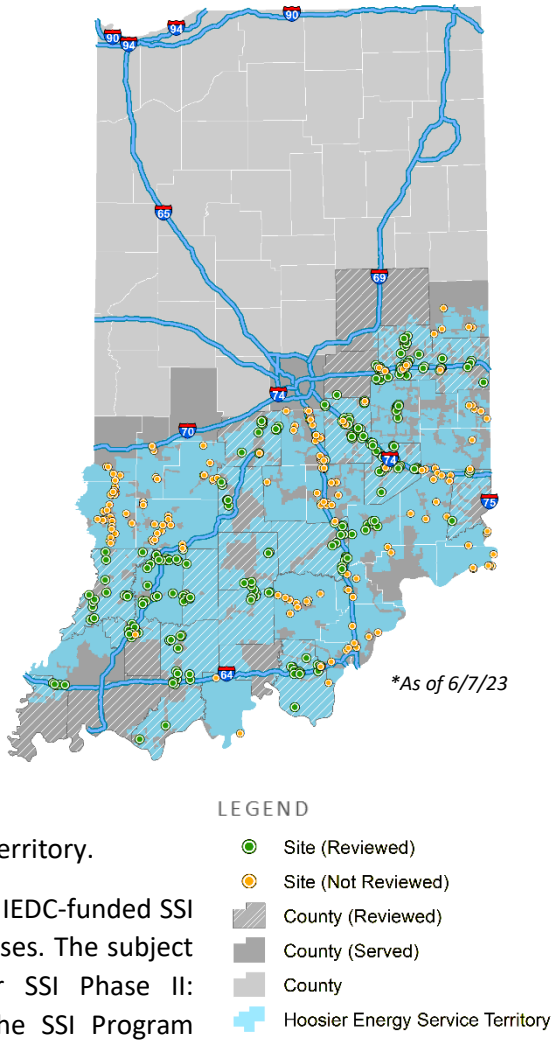


Introduction

This report presents the findings of the Strategic Sites Inventory (SSI) Phase II: Preliminary Due Diligence assessment of Site ID 18065-040 (referred to as the "Dishman Rothrock Site"), a 94.3-acre greenfield property near the City of New Castle, Indiana, which is located in Henry County and serves as the county seat. The Dishman Rothrock Site was nominated for advancement to SSI Phase II by officials from Henry County (New Castle Henry Economic Development Corporation) and Hoosier Energy. Hoosier Energy is an electric generation and transmission cooperative serving 18 member distribution co-ops in central and southern Indiana and southeastern Illinois. *The subject site satisfies baseline quality criteria, aligns with Henry County industry targets, and is deemed competitive to attract high-value business investments in support of sustainable community job growth and economic prosperity.* Report site maps are included as **Appendix A**.

SSI QUALIFIED SITE

The SSI Program is an advance site selection initiative designed to develop an inventory of strategic real estate assets to attract quality job-creating business investments. In 2019, the Indiana Economic Development Corporation (IEDC) initiated the Strategic Sites Inventory (SSI) Program in the State of Indiana with *SSI Phase I: Site Discovery* for all 92 counties with a goal to increase economic development competitiveness at the community level by identifying new, top quality raw land sites ideally suited for industrial and commercial projects. Henry County was included in the initial IEDC-funded project and benefitted from the identification of six potential high-value sites for mega site and heavy industrial land uses. A subsequent investment by IEDC in 2020 included expanded SSI Phase I site searches to identify light industrial and agribusiness sites, followed by expanded site searches for Technology MegaSites in 2022, increasing Henry County's total of quality SSI-identified sites to forty-five. A total of 404 sites have been identified within Hoosier Energy's served territory.



Site ID 18065-040 was identified from the expanded 2020 IEDC-funded SSI Phase I project for light industrial and agribusiness land uses. The subject site exhibits necessary competitive characteristics for SSI Phase II: Preliminary Due Diligence nomination. Details about the SSI Program phases are provided in **Appendix B**.

Leotta Location and Design (LL+D) has developed a systematic and effective methodology for screening potential sites for practical development as part of the SSI Phase II process. LL+D's site screening methodology is informed by fifteen-plus years of industrial and commercial site selection experience and economic development consulting in conjunction with demonstrated geospatial technology-based analysis and mapping expertise. LL+D staff and consulting partners include environmental science, civil and geotechnical engineering, landscape architecture, geospatial technologies, and economic devolvement experts who combine disciplines to identify and evaluate sites for industrial and commercial project uses.

The purpose of the SSI Phase II study is to provide a quantitative understanding of the subject site's advantages and challenges in conjunction with a rough order-of-magnitude (ROM) cost estimate to improve site functional use and mitigate development challenges. The SSI Phase II study is a desktop-based preliminary engineering and environmental due diligence exercise performed by discipline-specific experts with experience in industrial and commercial site selection and property development. Study of the subject site's physical and surrounding characteristics, assets, and impediments for development are reviewed in sufficient detail to formulate a defendable opinion on the competitive strength of the property for an economic development use.

The SSI Phase II study is intended to expose any potential "fatal flaws" that indicate significant development incumbrances or grossly compromise site competitiveness. The desktop review relies on an array of engineering, environmental, ecological, and cultural GIS data in conjunction with aerial imagery and available public records to assess current site development advantages and challenges. The SSI Phase II assessment concludes with the formulation of ROM cost estimates for improving site functional use and mitigating any potential development challenges.

LL+D's team of site selection and economic development experts provided an in-depth study of the subject site through an objective measure of physical features and surrounding characteristics and conditions across engineering, environmental, ecological, and cultural concerns. Overall site competitiveness for an economic development land use is made within the context of location requirements for permitting, construction, and operations relevant to the intended site project land use.

The SSI Phase II findings are expressed along three principal site assessment parameters:

Condition of the site's physical characteristics including assessment of engineering and environmental development advantages and challenges.

Connection to transportation assets, utility infrastructure, and major market areas.

Community support including available workforce, cultural feature impacts, and business climate for economic development.

A description of the subject site and summary of SSI Phase II findings is provided below.

Site Description

The Dishman Rothrock Site is an undeveloped (greenfield) property approximately 94.3 acres in total size located east of Indiana State Road 3 SR-3 along E County Road 400 S (CR-400). It is just outside the municipal limits of New Castle, Indiana, in Franklin Township. The subject site is comprised of five tax parcels, or tracts, independently owned by one landowner of record. **Appendix C** provides a summary of site parcel ownership information.



Site ID 18065-040 south view from E County Road 400

Current site condition is characterized by farmed agricultural land for the entirety of the site. The property has historically been used for farming. Two patches of forested space consisting of approximately 7.4 total acres exist within the subject site boundary. There are also two homestead structures currently observed onsite. County officials have stated that these will be demolished by September 2023. Land use surrounding the site is primarily agricultural and heavy industrial with some residential land use located within a mile. Industrial properties are located to the east and northeast—those immediately proximate to the site include TS Tech Indiana and a Boar's Head manufacturer. The cultural setting is urban to the north and northeast and rural in all other directions. The site is bordered by E County Road 400 S to the north and South Main Street Rd to the east. *A contiguous "buildable area" was defined within the confines of the subject site boundary intended to be most advantageous for construction. The Dishman Rothrock Site buildable area is approximately 87.1 acres and encompasses the majority of total site acreage. A small area with potential wetlands near the southeastern site boundary was left out of the buildable area.*

Geographic Location

Located in central Indiana, Henry County provides a rural/mixed setting near several urban areas along the high-commercial activity Interstate 70 (I-70), with access to major markets throughout the state and close proximity to Indianapolis. *In direct linear measure, the site is situated approximately 31 miles east of Indianapolis, IN; 63 miles northwest of Cincinnati, OH; 77 miles south of Fort Wayne, IN; 106 miles north of Louisville, KY; and 118 miles east of Columbus, OH.* Projects considering the Dishman Rothrock Site will benefit from locating on the outskirts of an urban community that is strongly embedded in economic growth and prosperity amongst a primary network of connectivity, while avoiding the heavy traffic congestion and higher land costs typical of more highly populated metropolitan areas. Access to surrounding labor markets at competitive wage rates is well within reach of the subject site.

The subject site is located in Franklin Township just outside the municipal boundary of the City of New Castle, which has a 2021 estimated population of 17,424. New Castle serves as the county seat for Henry County, which has a 2021 estimated population of 48,935. *More than 669,603 total residential population live within a 45-minute drive of the site. Approximately 64,719 businesses employing 914,417 people are located within a 60-minute travel time*. Construction, manufacturing, and professional, scientific, & technical services account for 19.5% of businesses employing 24.5% of total workforce within a 60-minute drive time of the site. A site vicinity map is provided in **Appendix A**.



Site ID 18065-040 Site Vicinity

Current Ownership

The subject site is comprised of five contiguous tax parcels, or tracts, and is reported by Henry County officials to have a single owner. *The subject site is comprised of five tracts of approximately 67.23, 20.21, 5.68, 0.60, and 0.59 acres according to Esri GIS data. According to county-provided information from December 2022, Henry County Redevelopment Commission (RDC) was to execute an exclusive real estate option by April 2023; meanwhile, the Henry County Beacon public portal lists the current landowner as Trent Dishman. LL+D strongly recommends that Henry County execute the stated real estate purchase option agreement with the landowner if it has not been done already. This is critically important to reduce uncertainty regarding property availability and price*. A "Site Parcel Configuration" map is included in **Appendix A**.

Findings Summary

The findings from the SSI Phase II study are summarized below. A discussion of key site development considerations is provided within the context of overall site physical **condition**, **connection** to infrastructure, and **community** support. LL+D's site competitiveness assessment across these key site development parameters are presented below.


Condition

Site conditions are defined as the physical characteristics of the subject property including geometric configuration, surface features, engineering, ecological and environmental concerns, and land use compatibility. *Overall, conditions for the Dishman Rothrock Site are favorable for development for the site's highest and best use as an economic development real estate asset*.


Size and Configuration of the subject site is sufficient in both acreage and configuration to support a Light Industrial or Advanced Manufacturing operation. *Total site area is approximately 94.3 acres, measuring approximately 1,812 feet across an east-west axis at its widest point and approximately 2,328 feet across a north-south axis*. The site is geometrically regular in configuration with adequate land between site boundaries providing ample acreage for a contiguous buildable area. The northern site boundary is bordered by E County Rd 400 S, the site's primary access road. The eastern site boundary is bordered by S Main St Rd. There is potential for an additional ingress/egress point on the site's western boundary. To achieve this, the extension of Brooks Drive, an industrial park road located to the west of the site, would be required, spanning approximately 900 feet into the site.

A contiguous buildable area totaling 87.1 acres has been defined to optimize facility construction on the site by positioning an operational footprint to avoid potential wetland areas. The buildable area occupies the majority of the site and is comprised of five tracts. Site access is supported by a single potential ingress/egress point located on E County Rd 400 S along the site's northern boundary.

Elevation/Topography presents minor grading challenges to prepare the site for development. *Based on a review of 5-meter cell size, LiDAR-derived digital elevation models (DEM) for the full site extent, a minimum elevation of 1,079.1 feet mean sea level (MSL) and maximum elevation of 1,091.8 feet MSL is reported. The 2021-2022 DEM indicates an average buildable area elevation of 1,088 feet MSL and average slope of 0.6 percent.*

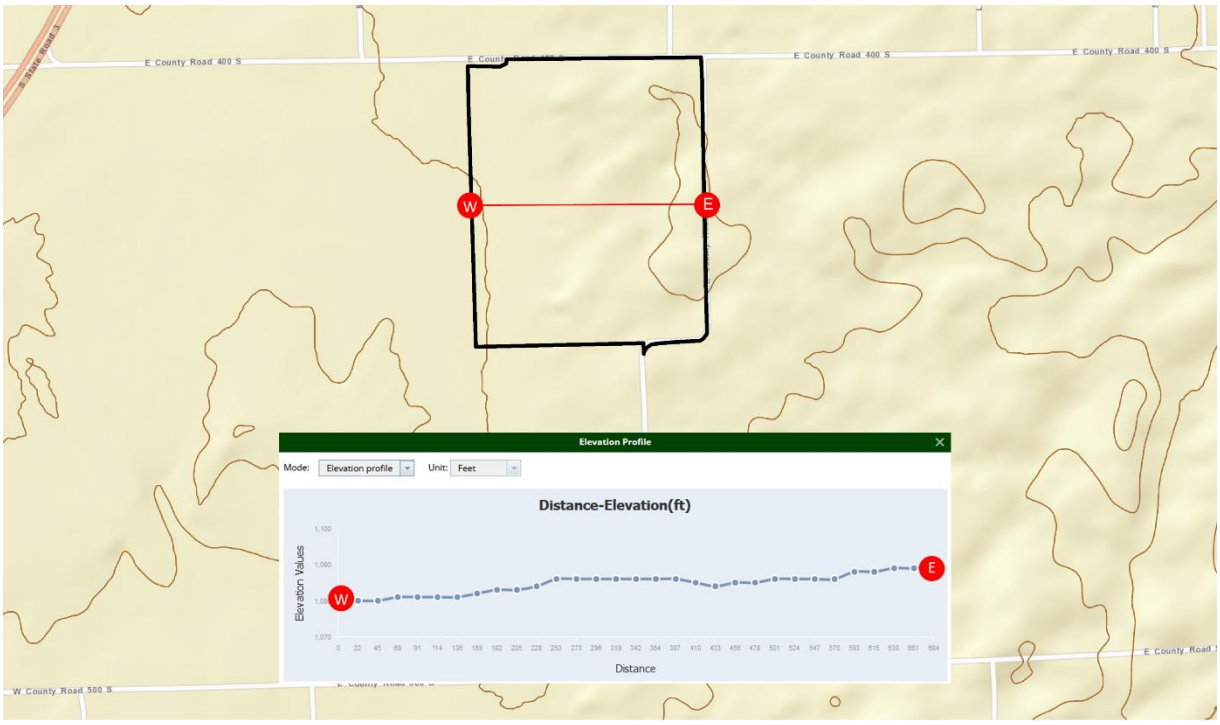

18065-040 Elevation Profile East-West (USGS 3DEP Viewer)

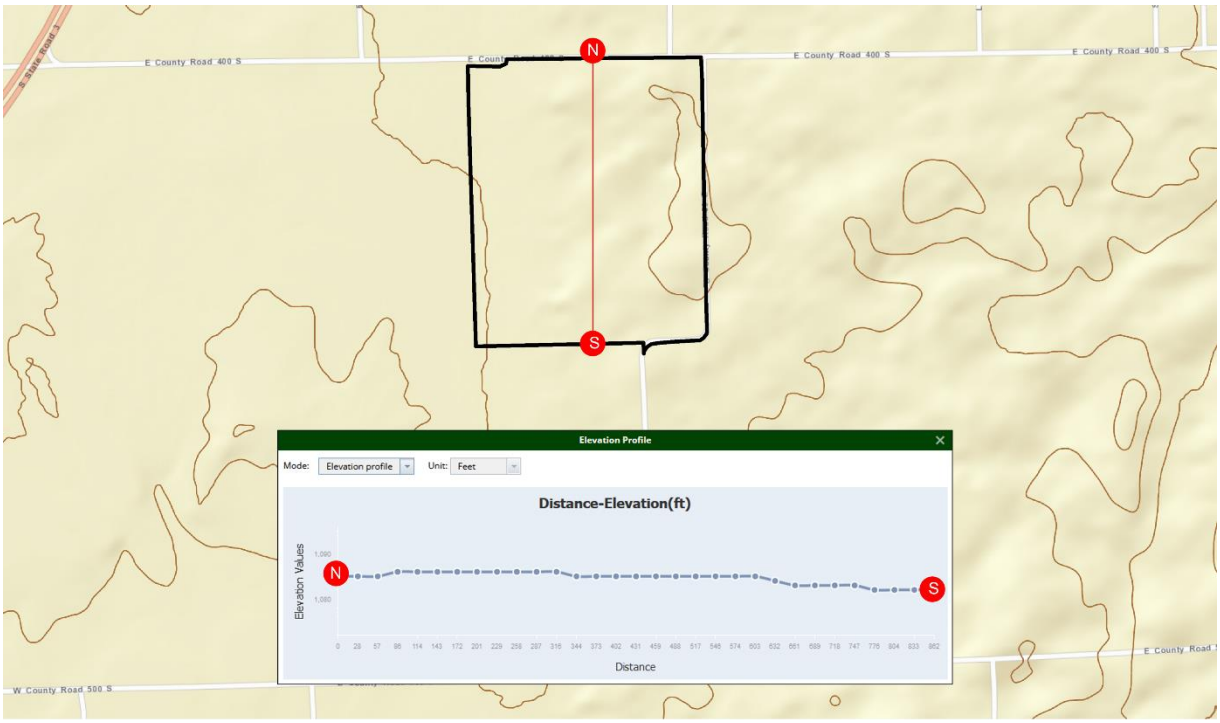

18065-040 Elevation Profile North-South (USGS 3DEP Viewer)

The majority of the site is generally flat and without significant sloping. The lowest elevation occurs along the westernmost portion of the site; the central and eastern portions of the site generally have higher elevation. Due to the flat terrain, there are limited opportunities for cut-fill operations using onsite fill material for grading or leveling purposes. This is subject to an onsite geotechnical engineering investigation to determine suitability of soil properties for construction. Additionally, any naturally sloping areas within the site can potentially serve as passive locations for effective site drainage and stormwater retention. A LiDAR-derived DEM and 10-ft contour map is provided as **Appendix A**.


Land Cover assessment is useful for identifying site design constraints and/or potential encumbrances that may be encountered during site development such as extensive clearing and grubbing, drainage concerns, etc. The vegetative cover type is used in conjunction with soil types, elevation, and hydrography data for interpretation of environmentally sensitive conditions such as wetlands and potential habitat for Threatened and Endangered (T&E) species and other species of concern (discussed later in this report). Certain land cover features may reveal commercial value of forested areas or be desirable to incorporate into the site design. Features such as densely wooded areas may provide a desirable buffer during construction and/or during facility operations for line of sight and noise control. Another example is integrating wetland areas into site plans, thus providing an element of design aesthetics.

Two primary sources were used to assess land cover characteristics:


1) *Recent high-resolution color aerial imagery* (ESRI/Google Earth 2023). Recent and past aerial imagery provide useful observational data for assessing current land cover conditions, as well as any notable changes over time. However, aerial imagery alone cannot be used without additional data sources to provide a more specific delineation of land cover type. For example, densely wooded areas are readily observed from aerial imagery, however, determination of forest composition is largely indeterminate without other remotely sensed inputs (i.e., color infrared imagery) or ground-based observation.

2) *The Multi-Resolution Land Characteristics Consortium (MRLC), National Land Cover Database (NLCD)*. The National Land Cover Database (NLCD) provides nationwide data on land cover and land cover change at a 30m resolution with a 16-class legend based on a modified Anderson Level II classification system. NLCD 2019 represents the latest evolution of NLCD land cover products focused on providing innovative land cover and land cover change data for the Nation. NLCD 2019 offers 8 integrated epochs of land cover for years 2001, 2004, 2006, 2008, 2011, 2013, 2016, and 2019. Developed classes in these years are directly derived from percent developed impervious surface and include a descriptor label that identifies the type of each impervious surface pixel. The NLCD Land Cover change index combines information from all years of land cover change and provides a simple and comprehensive way to visualize change from all 8 dates of land cover in a single layer.

Based on a review of the MRLC NLCD dataset, land cover for the site and buildable area consists of the following classified areas (acres, percent cover):

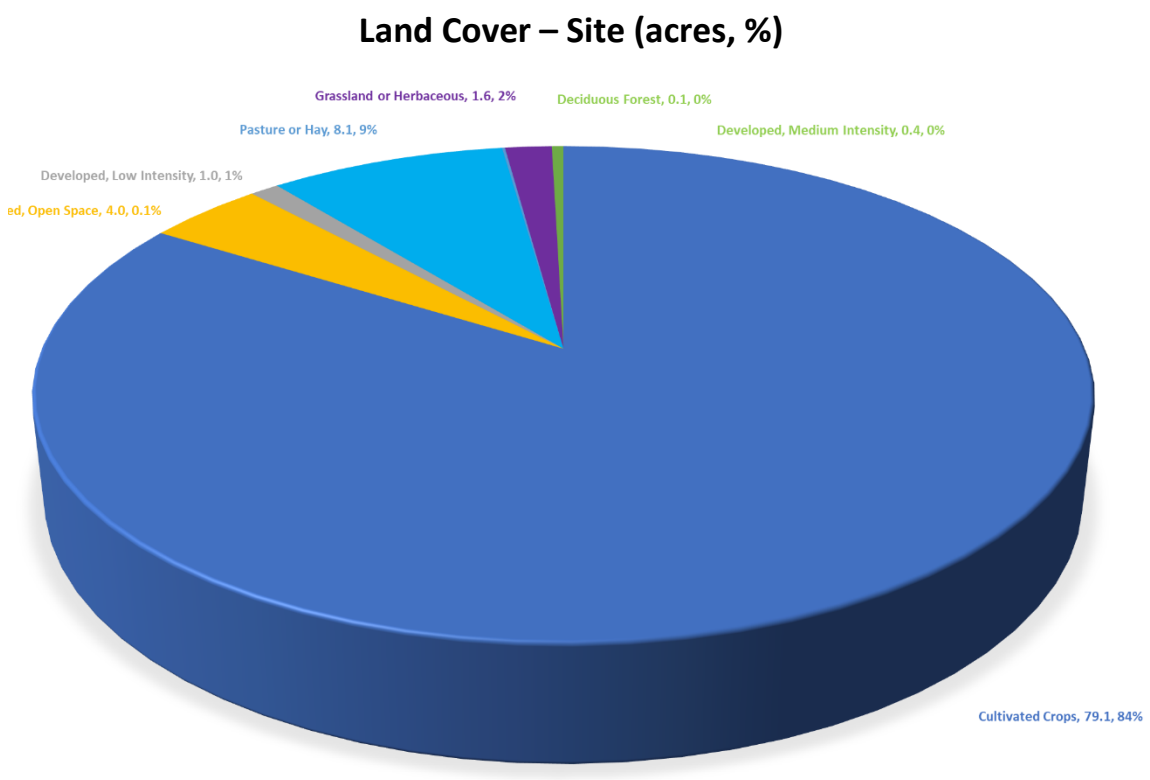

Land Cover – Buildable Area (acres, %)

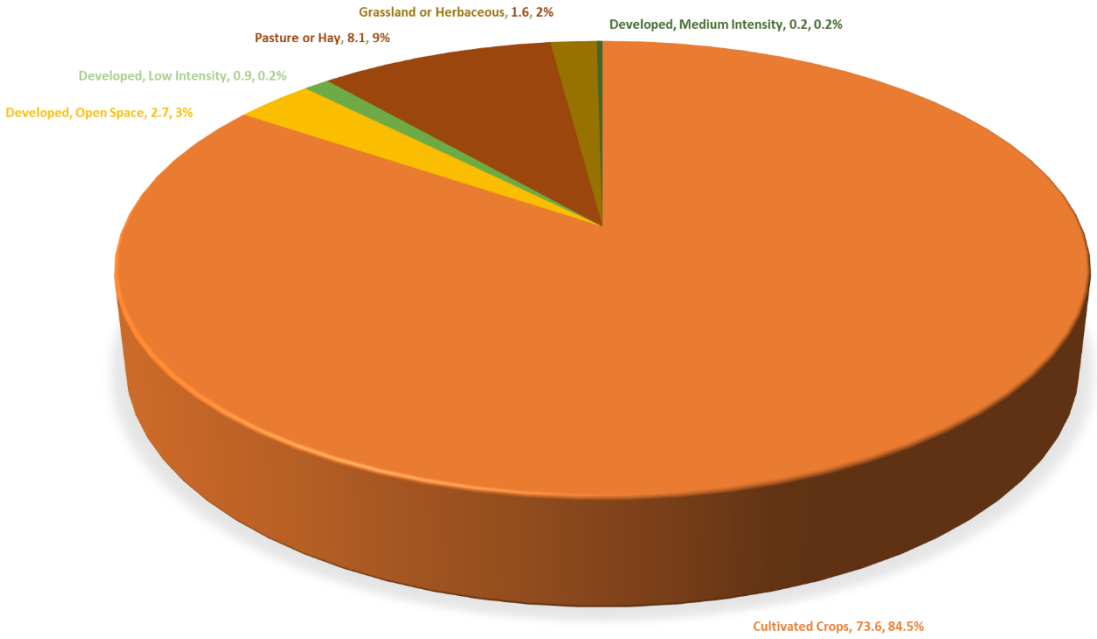

A Land cover map is provided in **Appendix A**.

Hydrography and Flood Risk were evaluated by consulting USGS National Hydrography Dataset (NHD), a geospatial database which identifies stream segments or reaches that make up the nation's surface water drainage system, and FEMA National Flood Hazard Layer (NFHL), a geospatial database that contains current effective flood hazard data. *Based on a review of NHD and NFHL data, the site and buildable area are highly favorable for site development with low flood risk and minimal recorded/observed significant hydrography features. 100% of the site is outside the FEMA-designated flood hazard area and is designated as Flood Zone X (within 0.2-percent-annual-chance flood or 500-year floodplain). The nearest FEMA-designated flood hazard area is located approximately 1.2 miles east of the site at the Flatrock River. This does not pose any threat to the site.* A hydrography and FEMA flood hazard map is provided in **Appendix A**.

Potential Wetlands are interpolated through observation of multiple data inputs including:

1) USGS National Wetlands Inventory (NWI) – developed for non-404 jurisdictional wetland mapping, so must be understood to have limited accuracy
2) LiDAR-derived digital elevation model (DEM) – topography/elevation
3) USGS NHD – hydrography
4) NRCS SSURGO – soils data provides hydric rating
5) Color-infrared imagery (where available) – for visual indication of wet or inundated areas (consulting differing years to ensure wet areas are not the result of a period flood event)

The NWI data is consulted as the principal indicator of potential wetlands, as the mapping methodology utilizes the above-referenced inputs in addition to other data sources in conjunction with qualified scientific review and quality control of interpolated wetlands delineation and taxonomy. The NWI data also provides a delineation of wetland types, which is important in the estimation of permitting burden and potential compensatory mitigation costs. The additional data sources are consulted to ensure congruency of information suggestive of potential wetlands occurrence.

From the US EPA Wetland Regulatory Authority fact sheet, wetlands subject to Clean Water Act Section 404 are defined as "areas that are inundated or saturated by surface or ground water at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in saturated soil conditions. Wetlands generally include swamps, marshes, bogs, and similar areas." There are three primary conditions required for surface areas to be considered wetlands: 1) at least periodically, the land supports predominantly hydrophytes, 2) the substrate is predominantly undrained hydric soil, and 3) the substrate is saturated with water or covered by shallow water at some time during the growing season of each year. As determined by the U.S. Army Corps of Engineers, the federal agency responsible for enforcing federal laws protecting wetlands, an area must exhibit all three of the above-referenced conditions to be considered a wetland.

The following GIS-based information was consulted for the desktop wetlands assessment:


- **Hydrophytic Vegetation**: Recent and historical aerial imagery and NWI data.
- **Wetland Hydrology**: LiDAR-derived DEM, USGS topo maps, and high-resolution aerial imagery.
- **Hydric Soils**: NRCS Web Soil Survey and SSURGO data.

There are approximately 1.76 acres of potential wetlands reported on the subject site. The wetland areas are located along the southwestern boundary of the site and are classified as "freshwater emergent" wetlands. Freshwater emergent wetlands are a class of wetlands characterized by erect, rooted, herbaceous plants growing in water or on a substrate that is at least periodically deficient in oxygen as a result of excessive water content, excluding mosses and lichens. This vegetation is present for most of the growing season in most years and is usually dominated by perennial plants. *According to the SSURGO Hydrologic Soil Group map, 48.5% of the total site has soils estimated to have hydric components. Portions of these soils are dispersed across the site and the proposed buildable area. While no potential wetlands are reported within the buildable area, wetland permitting and mitigation may be required on the subject site. This appears to pose minimal development impediments to the site*. NWI potential wetlands map is provided as **Appendix A**.

Soils conditions are assessed to identify potential advantages and/or challenges that could have an impact on site design, construction, and overall use of the site. Soil types are evaluated with respect to drainage and engineering performance for excavations, road construction, and building foundation support. Additionally, hydric soil ratings are used in conjunction with wetlands data to increase confidence in potential wetlands interpretation (reported in previous section).

According to the United States Department of Agriculture (USDA), Natural Resource Conservation Service (NRCS) Soil Survey Geographic Database (SSURGO) accessed via the NRCS Web Soil Survey, *11.3% (11.2*

acres) of the subject site soils are classified as "Miamian silt loam, New Castle Till Plain, 2 to 6 percent slopes, eroded" with a drainage class of "Well drained." Somewhat poorly drained to very poorly drained soil types including Crosby silt loam, New Castle Till Plain, and Cyclone silty clay loam make up the remaining 88.7% (83.5 acres) of the site. These soils are assigned to SSURGO hydrologic soil groups and have slow infiltration rates with high runoff potential.

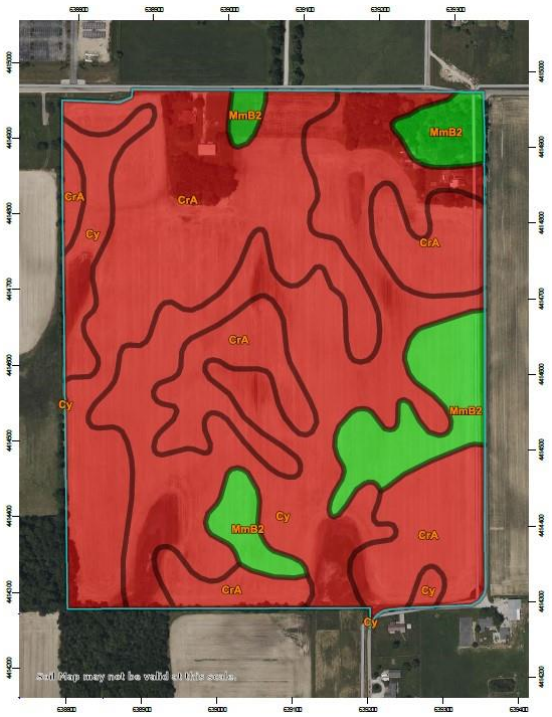

SSURGO Small Commercial Building Rating "Very limited"

Soil suitability properties for small commercial building construction across 88.1% (82.9 acres) of the subject site are indicated as "Very limited" for shallow (2 feet deep) reinforced concrete footings. "Very limited" indicates that the soil has one or more features that are unfavorable for the specified use. The limitations generally cannot be overcome without major soil reclamation, special design, or expensive installation procedures. Poor performance and high maintenance can be expected. An additional 11.9% (11.3 acres) of the subject site are indicated as "Not limited" for shallow (2 feet deep) reinforced concrete spread footings. "Not limited" indicates that the soil has features that are favorable for the specified use.

Substantial foundation requirements may not be supported by the soil conditions and must be determined through on-site geotechnical engineering investigation. The limitations can be overcome or minimized by special planning, design, or installation. A SSURGO soils map is provided in **Appendix A**. The USDA, NRCR SSURGO soils reports for drainage class, small commercial buildings, and hydric rating are provided in **Appendix G**.

Sinkholes are common geological phenomenon occurring throughout the United States. They are only one of many kinds of karst landforms, which include caves, disappearing streams, springs, and underground drainage systems. Karst is a generic term which refers to the characteristic terrain produced by erosional processes associated with the chemical weathering and dissolution of limestone or dolomite.

The Sinkhole Areas and Sinking-Stream Basins Map developed by the Indiana Geological Survey shows the locations of sinkhole areas (SHA) and sinking-stream basins (SSB) in southern Indiana. Some sinkholes may exist outside the delineated areas, and some sinkholes may exist within the areas designated as sinking-stream basins, but such areas are not shown in this map. *The subject site lies entirely outside of the SHA and SSB areas, and thus should not be at risk of sinkholes.* The reliability of reported sinkhole occurrences is unknown. Potential site susceptibility to sinkholes must be determined through more thorough professional geological and geotechnical engineering investigation.

Zoning and Land Use is administered and governed by the 2004 Henry County Development Code. *According to SSI Pre-Project Questionnaire, the site is currently zoned "I1" Light Industrial. The Henry County online zoning map shows the site as being zoned "A1" Agricultural. The 2018 Henry County Comprehensive Plan future land use map calls for all site parcels to be Industrial.* A Nearby Zoning Map is provided in **Appendix D.** A rezoning request from 2022 provided by Henry County is also included in **Appendix D** and includes industrial park site concepts.

The apparent current land use of the subject site is derived from the SSI Pre-Project Questionnaire, the 2018 Comprehensive Plan, the 2004 Development Code, recent aerial imagery, and Google Street View. *Recent aerial imagery shows current land use to be agricultural/vacant land as evidenced by minimal forested areas and lack of commercial structures. The aerial imagery-derived land use observations for the site agree with the Henry County online zoning map's Agricultural designation, which has been changed to Light Industrial according to county officials. Observations also match the NLC Database – Cultivated Crops (97%) land cover classifications.*

Current land use immediately surrounding the subject site to the north, south, and east consists mainly of agricultural lands and scarce residential properties. There are three residential properties adjacent to the site's southeastern boundary across S Main Street Road and light residential land use to the north and northeast across E County Road 400 S. Land use to the west and northwest is primarily industrial and agricultural. A Boar's Head manufacturing facility is located west of the site across Brooks Dr, and a TS-Tech Indiana manufacturing facility is located to the northwest across E County Road 400 S. All parcels immediately surrounding the site consist of Agricultural, Light Industrial, and Heavy Industrial zoning districts.

There is little to no indication of other land uses over the last seventy-six years based on a review of historical aerial imagery dating to 1947 (provided by EDR Radius report). Fourteen epochs from 1947 to 2020 were reviewed to determine the sequential occupancy of the subject site. Since 1947, the subject site has been consistently used for agriculture. A small portion of the site near the northeastern boundary has had trees growing on it over the last thirty years Historical aerial imagery is included in the EDR Radius Report provided as **Appendix H**.

Current site land use is ideal to support future development of the site for Industrial land uses. Surrounding tract land use is compatible with the intended site use immediately around the buildable area. While residential land use exists to the southeast, north, and northeast, adequate buffer should mediate any development objections. The land use is indicated from the Henry County online zoning map to be Industrial to the north and east and Agricultural to the south and west. *Tracts surrounding the subject site, and especially the buildable area, should be considered for rezoning with uses that are compatible with the intended industrial uses of the site. Compatibility with surrounding land use is vital to preserving the competitiveness of the site for an economic development use by preventing encroachment of land uses that would create real or perceived risk to prospective business considering the site for development.*

Relevant excerpts from the 2004 Henry County Development Code prescribing zoning and land use polices, standards, and statutory requirements for land development are provided as **Appendix D**. Henry County Zoning and Drainage Permit Process details are also included in **Appendix D**. Relevant sections

from the 2018 Comprehensive Plan are provided as **Appendix F**. Officials from the Henry County Planning Department should be consulted for detailed requirements pertaining to land use and zoning district designations.

Threatened and Endangered Species are defined under the federal Endangered Species Act (ESA) of 1973. The ESA provides a program for the conservation of threatened and endangered (T&E) plants and animals and the habitats in which they are found. The lead federal agencies for implementing ESA are the U.S. Fish and Wildlife Service (USFWS) and the U.S. National Oceanic and Atmospheric Administration (NOAA) Fisheries Service. The USFWS maintains a worldwide list of endangered species. Species include birds, insects, fish, reptiles, mammals, crustaceans, flowers, grasses, and trees.

The ESA defines an *endangered species* as "any species which is in danger of extinction throughout all or a significant portion of its range." Endangered species are automatically protected by prohibitions of several types of "take," including harming, harassing, collecting, or killing, under Section 9 of the ESA. There are some limited exceptions to these rules listed in Section 10 of the ESA. The ESA defines a *threatened species* as "any species which is likely to become an endangered species within the foreseeable future throughout all or a significant portion of its range." Threatened species receive protections through separate regulations issued under Section 4(d) of the ESA.

LL+D staff consulted the USFWS Information for Planning and Consultation (IPaC) online tool (https://ipac.ecosphere.fws.gov/) to assess potential project effect on listed species (*a plant or animal that receives federal protections under the Endangered Species Act. Species can be protected as endangered or threatened*) and other USFWS trust resources (*includes migratory birds, species listed as threatened and endangered under the Endangered Species Act, interjurisdictional fishes, marine mammals, wetlands, and lands managed by USFWS, such as national wildlife refuges*). The IPaC tool is a project planning tool that streamlines the USFWS environmental review process.

An IPaC Resource List was generated for the subject site. The Resource List is a report that automatically generates a list of species and other resources such as critical habitat (collectively referred to as trust resources) under USFWS jurisdiction that are known or expected to be on or near the project area referenced below. The list may also include trust resources that occur outside of the project area, but that could potentially be directly or indirectly affected by activities in the project area. However, determining the likelihood and extent of effects a project may have on trust resources typically requires gathering additional site-specific (e.g., vegetation/species surveys) and project-specific (e.g., magnitude and timing of proposed activities) information.

The IPaC trust resources report lists critical habitats and species of concern known or suspected to be found in habitats within regional ecology. The IPaC trust resources report found that the following species may potentially be affected by activities in this location:

- **Mammals**:
    - Indiana Bat (*Myotis sodalist*) – Endangered
    - Northern Long-eared Bat (*Myotis septentrionalis*) – Endangered
    - Tricolored Bat (*Perimyotis subflavus*) – Proposed Endangered

- **Birds:**
    - Whooping Crane (*Grus americana*) – Experimental population, non-essential
- **Insects**:
    - Monarch Butterfly (*Danaus plexippus*) – Candidate
- **Critical Habitats**:
    - There are no critical habitats at this location.

The IPaC report also identifies the Migratory Birds Resource List that identifies certain birds protected under the Migratory Bird Treaty Act of 1918 and the Bald and Golden Eagle Protection Act of 1940. Birds listed in the report are birds of particular concern either because they occur on the USFWS Birds of Conservation Concern (BCC) list or warrant special attention within the subject site location. The report does not include a list of every bird found within the site location, nor a guarantee that every bird on this list will be found within the site. The migratory bird list is derived from data provided by the Avian Knowledge Network (AKN). The AKN data is based on a growing collection of survey, banding, and citizen science datasets and is queried and altered to return a list of those birds reported as occurring in the 10km grid cell(s) that intersect the specified site study area location and have been identified as warranting special attention because they are a BCC species or an eagle (Eagle Protection Act requirements may apply) in that area.

The IPaC Migratory Birds Resource List (MBRL) provides a "Probability of Presence" summary indicating the best understanding of when birds of concern are most likely to be present in the site area. *While there is no immediate known impact to site development, the MBRL should be further reviewed within the context of environmental permitting requirements by a qualified environmental/ecological consultant, as temporal migratory bird presence may affect the timing of certain construction-related activities on the subject site*. The IPaC trust resources report is provided in **Appendix E**.

Legacy Environmental Concerns consist of historical activities and events both on the subject site and on nearby tracts where harmful contaminants were released into soil, surface water, and groundwater. If not properly remediated under state and federal regulatory requirements by qualified environmental consultants/contractors, historical contamination liabilities may be inherited through chain of title even if the contamination originated offsite, particularly with migration through groundwater transport. The historical environmental event implication for site development depends on many factors including the type, extent, concentration, complexity, physical setting and surface/subsurface conditions, and time since the event, which may or may not pose a risk to prospective investors on site development.


A cursory review of the subject site and surrounding properties was conducted to identify any potential legacy environmental concerns. Informational resources consulted for this review include:

- EDR Radius Report;
- Recent and historical aerial imagery review;
- US Environmental Protection Agency's (EPA) Enforcement and Compliance History Online (ECHO) database (EDR Radius Report limits ECHO database search to the target property); and
- Information provided through interviews with local political officials, economic development representatives, and landowners (where available)

The EDR Radius Report searches environmental databases for permitted facilities, events, and other potential concerns occurring on the subject site and up to 1.0 mile of the site boundary. EDR use statement: "*A search of available environmental records was conducted by Environmental Data Resources, Inc (EDR). The report was designed to assist parties seeking to meet the search requirements of EPA's Standards and Practices for All Appropriate Inquiries (40 CFR Part 312), the ASTM Standard Practice for Environmental Site Assessments (E 1527-13), the ASTM Standard Practice for Environmental Site Assessments for Forestland or Rural Property (E 2247-16), the ASTM Standard Practice for Limited Environmental Due Diligence: Transaction Screen Process (E 1528-14) or custom requirements developed for the evaluation of environmental risk associated with a parcel of real estate*".

Based on the results of the EDR Radius Report and a cursory review of historical aerial imagery, no environmental legacy concerns were identified near the subject site. Full facility information is provided in EDR Radius Report is provided as **Appendix H**.

As the EDR Radius report limits environmental database searches to the subject site and within 1.0 mile of the subject site, the EPA ECHO database was consulted for potential significant environmental concerns within 2.0 miles of the site including active permitted facilities operating under the EPA Clean Water Act, Title V of the Clean Air Act, or the Resource Conservation and Recovery Act (RCRA) for control of solid waste. In limited instances, new air permit applications can be subject to more stringent requirements based on nearby existing permitted facilities' total air emission pollutant volumes and concentrations.

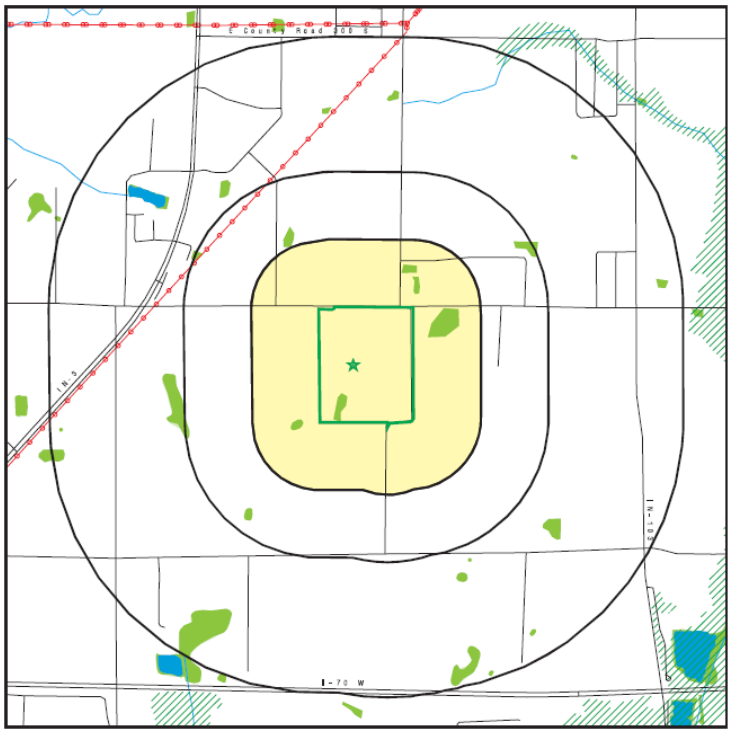

EDR Radius Report Mapped Sites Overview Map

ECHO search results reported one facility within a 2-mile radius of the subject site that has had a violation of the Clean Air Act within the last 3 years and Formal Enforcement Actions within the last 5 years. The facility is the Hayes Landfill, which is located 1.5 miles northwest of the subject site. There has been one violation of the Clean Air Act reported over the last three years. Both informal and formal enforcement actions have occurred, and the case status is listed as "Resolved". With the 1.5-mile distance from the subject site and current lack of violations, this does not appear to pose any threat to the subject

site. Based on the expanded ECHO search, no environmental legacy concerns were identified on the subject site. The ECHO site search results are provided in **Appendix H**.

As with any desktop research exercise, actual potential environmental concerns may not be fully recognized or understood without conducting an on-site field investigation. The industry standard for real estate environmental review is the Phase I Environmental Site Assessment (ESA). Governed by the ASTM E1527: *Standard Practice for Environmental Site Assessments: Phase I Environmental Site Assessment Process.* The Phase I ESA is designed to investigate property prior to ownership transfer or improvements for use to identify and document any existing or potential contamination that must be addressed or give cause for liability. The Phase I ESA methodology includes more detailed research and review of environmental databases, historical aerial imagery, title research, and on-site field observations of the subject site and immediately surrounding properties.



Connection

Site connectivity includes access to key transportation assets and utility infrastructure sufficient for the use intensity of the subject site. Access to available workforce is also measured within the context of the intended economic development project use (e.g., heavy industrial, light industrial, commercial/freight logistics, etc.). *The Dishman Rothrock Site is well connected to transportation and utility assets with close proximity to local utilities access (potable water, sewer, electric, natural gas, and telco/broadband). In conjunction with strong community support and adequate workforce availability, the site is well positioned for competitive response to light industrial/advanced manufacturing project opportunities*.

Transportation Assets are in place to serve the logistical needs of commercial/industrial business operations in the area. *The site benefits from substantial transportation connections, including a multilane divided state highway and interstate access.*

Access to the site is currently available via E County Road 400 S, a two-lane highway that runs along the site's northern boundary. A single point of ingress/egress can be constructed along this road. From the site, truck traffic must travel approximately 0.75 miles west on E County Road 400 S to access Indiana State Road 3 (SR-3), a four-lane principal arterial highway. Traffic must then travel 1.8 miles southwest to reach Interstate 70 (I-70). All roadways leading to interstate access appear to be in good condition and suitable for truck traffic. The short distance from the site to the interstate is considered an advantage for many industry types. A site access map is included in **Appendix A**.

Truck Routes accessible from the site offer convenient transportation options for truck traffic. For immediate north-south travel, SR-3 is readily accessible. Additionally, for east-west travel, I-70 is located approximately 2.5 miles southwest of the site. I-70 can be taken west for 42 miles to reach Indianapolis and multiple other truck routes including I-69, I-65, I-74, US 31, US 36, and US 421. Another option is to take I-70 east for 75 miles to reach Dayton, Ohio and multiple other truck routes including I-75 and US 35. The site's advantageous proximity to several truck routes

and interstate access enhances its appeal for transportation and logistics purposes. A transportation vicinity map is provided in **Appendix A**.

Railroads do not currently extend to the subject site and are not required for the intended light industrial/advanced manufacturing project uses of the site. The nearest railroad, a Norfolk Southern (NS) main line, is located approximately 6.7 miles northeast of the site in a direct linear measure. However, it is not considered economically feasible to construct a rail spur leading to the site. A transportation vicinity map is provided in **Appendix A**.

Airport access is beneficial for both corporate executive and other business-related representatives travel to a facility during construction and when operational. Cargo airport access provides an opportunity for transportation of process input materials and product distribution.

The Indianapolis International Airport (IND) is approximately 58.2 miles west (~1 hour drive) of the subject site. IND is home to the second largest FedEx Express hub in the world and was ranked as the sixth busiest U.S. airport in terms of air cargo throughput in 2020; only the FedEx SuperHub in Memphis, Tennessee surpasses its cargo traffic. Additionally, because of FedEx's activity, IND ranked as the sixth busiest U.S. airport in terms of air cargo throughput in 2020.

The Dayton International Airport (DAY) is approximately 69.7 miles east (~1 hour and 5-minute drive) of the subject site. DAY is the third busiest and third largest airport in Ohio behind Cleveland Hopkins International Airport and John Glenn Columbus International Airport. The Dayton International Airport had about 584,490 enplanements in 2022. In 2021, the airport had 41,200 aircraft operations, an average of 113 per day. This airport is a good alternative to Indianapolis International Airport (IND) in the relative area, being only slightly further than IND in distance from the subject site.

Seaport access is not required for the intended light industrial/advanced manufacturing project uses of the site. However, the nearest seaport is Ports of Indiana - Jeffersonville located within approximately 150 miles (~2 hour and 15-minute drive) south of the site. Ports of Indiana-Jeffersonville is on the Ohio/Mississippi river system, just minutes from downtown Louisville, KY. Handling more than 2 million tons of cargo annually, the port is a center for the rapidly growing advanced manufacturing and logistics industries.

Utility Infrastructure is for the subject site is generally favorable, although some improvements and extensions are necessary. The City of New Castle is responsible for providing water and sewer services. CenterPoint Energy provides natural gas and Hoosier Energy is the provider of electric service. Telco/broadband access is offered by New Lisbon Broadband and NineStar, ensuring reliable communication and internet connectivity. Both water and sewer systems need improvements and extensions to make them accessible to the site. A natural gas pipeline is located near the site and needs a slight extension. Three-phase facilities run along the entire northern property line and E County Road 400 S. The utility service points of access for extending services to the site are located along the site's northern boundary. Site utility information obtained from the "Local Site Survey Questionnaire" is provided as

Appendix J. Additional utility information obtained from Henry County can be found in **Appendix L**. An energy infrastructure and utility access point map is provided as **Appendix A**.

Potable Water is located approximately 800 feet west of the subject site near the intersection with CR 400 S and Brooks Drive. Proposed improvements for domestic water include the extension of a 12-inch water main. This extension would originate at the north central edge of the subject site and run west along CR 400 S, reaching approximately 400 feet beyond the intersection with Brooks Drive. An existing 12-inch ductile iron water main is located along the north edge of CR 400 S that would be tapped to connect the proposed 12-inch main.

To enhance operational flexibility and facilitate maintenance, several isolation water valves and hydrants are assumed to be installed along the proposed water main, as required by IDEM (Indiana Department of Environmental Management). It is important to note that the aforementioned improvements would necessitate permitting, involving INDOT (Indiana Department of Transportation), IDEM, and Henry County.

The above improvements would require permitting, which would include INDOT, IDEM, and Henry County. The Preliminary Planning Opinion of Probable Construction Cost is estimated at $2,680,000.00, encompassing the improvements for both the sanitary sewer and water systems. For accurate information on current and proposed water service flow capacities, it is advisable to verify on a project-by-project basis with local water utility officials. Additional information regarding the site survey questionnaire provided by Henry County can be found in **Appendix L**. A comprehensive overview map of the utility infrastructure is available in **Appendix A.**

Sewer/Wastewater infrastructure is not currently available for the subject site. However, a comprehensive plan has been developed to extend services, considering projected wastewater flows of 250,000 gallons per day (gpd). The nearest existing lift station is located one mile from the site on IN State Road 3 (SR 3).

Proposed sanitary improvements include the construction of a lift station with a design flow capacity of 700 gallons per minute (GPM), utilizing a peaking factor of 4.0. The lift station would be situated within the low-lying area along the northeastern edge of the subject site. The discharge from the lift station would be facilitated through a 10-inch force main, running west along CR 400 S, then north along State Road 3. It would eventually combine with an existing 6-inch force main, approximately 800 feet south of the intersection of CR 350 S and SR 3. To accommodate the proposed flows and combine the flows from both lift stations, the existing 6-inch force main would need to be upsized to a 12-inch force main.

The proposed 12-inch force main would continue north along SR 3 until it reaches an existing manhole at SR 3 and CR 300 S. The manhole is connected to a 36-inch gravity sewer, which was part of recent improvements and has sufficient capacity to handle the additional flow. The portion of the force main that requires crossing under SR 3 would be installed using jack and bore construction with a casing pipe to prevent disruptions to SR 3 during construction. This approach generally aligns with the requirements of the Indiana Department of Transportation (INDOT).

Additionally, three combination air relief valves would be placed along the alignment in areas where there are significant variations in elevation. It is assumed that a section of gravity sewer will be extended from the wet well of the proposed lift station for future expansions.

The above improvements would require permitting, which would include INDOT, IDEM, and Henry County. The Preliminary Planning Opinion of Probable Construction Cost is estimated at $2,680,000.00, encompassing the improvements for both the sanitary sewer and water systems. For accurate information on current and proposed capacities, it is recommended to verify the details on a project-by-project basis with local sanitary sewage utility officials. Additional information regarding the site survey questionnaire provided by Henry County can be found in **Appendix L**. A comprehensive overview map of the utility infrastructure is available in **Appendix A.**

Natural Gas is readily available for the subject site via a 6" PE medium pressure line. The line terminates approximately 1,600 feet west of the site. The maximum operating pressure for this 6" line is 94 psig. Natural gas service is provided by CenterPoint Energy. Current gas service capacity is indeterminate and should be verified on a project-by-project basis with CenterPoint Energy. Information provided by Henry County can be found in **Appendix L**. A utility infrastructure overview map can be found in **Appendix A.**

Electric power for the site is supplied by Hoosier Energy. Three-phase facilities run along the entire northern property line and E County Road 400 S, ensuring convenient access to power. In addition, single-phase facilities run along the entire eastern property line along S County Road 50 E. The property has the advantage of being able to receive power from three different substations, offering flexibility in terms of capacity and reliability requirements. This flexibility is particularly beneficial if redundant capacity and automatic failover switching are essential for the proposed facility. It is important to note that loads exceeding 5 megawatts (mW) would require a thorough evaluation but can still be accommodated and served. Hoosier Energy has the capacity to support such loads, subject to detailed assessment and planning. By leveraging the existing electrical infrastructure and the available substations, the site can meet a range of power needs for various projects and operations.

Information provided by Henry County in the "Local Site Survey Questionnaire" can be found in **Appendix J**. A utility infrastructure overview map can be found in **Appendix A.**

Telco/Broadband distribution is provided to the site by New Lisbon Broadband and NineStar. These providers also serve the nearby industrial park including Boar's Head and TS Tech. Information provided by Henry County in the "Local Site Survey Questionnaire" can be found in **Appendix J**. A utility infrastructure overview map can be found in **Appendix A.**

Major Market Areas are accessible within a two-hour drive of the subject site. By vehicular travel, the site is situated 51.9 miles from Indianapolis to the west and 107 miles from Cincinnati to the southeast

with 2021 total populations of 882,039 and 308,935 respectively. Travel distances to major markets and seaports are provided below. A major market vicinity map is provided as **Appendix A.**

Time and Distance to Major Markets


Major Markets	Travel Time	Miles
Indianapolis, IN	0:48	44.6
Fort Wayne, IN	1:57	102
Cincinnati, OH	1:47	100
Columbus, OH	2:00	133
Louisville, KY	2:23	133
Toledo, OH	3:04	208
Lexington, KY	2:59	180
Chicago, IL	3:34	225
Detroit, MI	4:02	269
Cleveland, OH	4:06	247
St. Louis, MO	4:23	287
Nashville, TN	4:56	328
Milwaukee, WI	4:57	322

Time and Distance to Ports

Ports of Indiana	Travel Time	Miles
Jeffersonville	2:21	130
Burns Harbor	3:13	204
Mount Vernon	3:41	230

Community

Community aspects conducive to site competitiveness include both measurable and intangible factors that can either strengthen or undermine a site's inherent competitive advantages. While workforce availability and cultural features are commonly accounted for, business and political climate are often neglected, yet serve as an important indicator for both community and governmental desired to welcome new business investment. The Henry County community and political leadership are strong proponents of business growth and new job creation, creating a business climate highly conducive to project investment support through efficient permitting, workforce training, and competitive tax structures. Henry County is committed to supporting long-term industrial and commercial business operations in its communities.

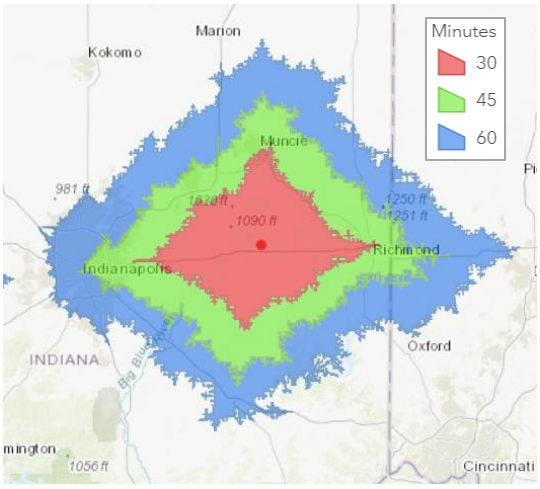

30, 45, 60-minute Drive-time Employment Query

Description of the Economy

Henry County is located in Indiana, a state that boasts a business-friendly environment, solid infrastructure, and substantial creation of manufacturing jobs. The county falls within the Eastern region of Indiana and has a population of 48,935 (US Census Bureau). New Castle, the county seat, has a population of 17,424 (US Census Bureau). New Castle is the largest and only city in the county. Located in

the East Central Indiana region, Henry County has access to a trained workforce with a history in innovation, manufacturing, food processing, agriculture, logistics and information technology. Further information about Henry County population and economic trends can be found in the 2018 Comprehensive Plan, provided as **Appendix F.**

Demographics

Henry County has a population density of approximately 124 persons per square mile (ppsm), compared to the state population density of 181 ppsm, and is the twenty-ninth most populated county in the State of Indiana. The population, considering race alone or in combination with one or more other races, is roughly 95.9% White, 3.4% Black or African American, 0.7% Native American, 0.7% Asian, 0.1% Pacific Islander, and 0.8% some other race. Approximately 1.8% of the population are Hispanic or Latino. The county's median age is 42.1.

Employment and the Economy and Income

Henry County, IN is home to a highly engaged and skilled local workforce with a total resident labor force of approximately 21,014 people. Unemployment (5.5%) is higher than the state average (4.8%). Educational Services, Health Care & Social Assistance; Manufacturing; and Retail Trade make up the largest industries in the county, employing 26.5%, 20.7%, and 11.0% of workers, respectively. Educational Services, Health Care & Social Assistance employs 5,252 people; the Manufacturing sector employs 4,109 people; and Retail Trade employs 2,179 people. The highest paying industries in Henry County, by median earnings, are Mining, Quarrying, and Oil and Gas Extraction; Wholesale Trade; and Utilities, with 2020 median annual earnings of $73,977, $50,673, and $49,453, respectively. household income is $49,832, which is less than the median annual income of $62,843 across the United States.

Population/Workforce *within a 60-minute drive time from the site include a total population of more than 1,810,871 and 64,719-plus businesses employing over 914,417 people according to Esri 2022 demographic data. Construction, manufacturing, and professional, scientific, & technical services account for 19.5% of businesses employing 24.5% of total workforce within the 60-minute drive of the site*. A 30, 45, and 60-minute drive-time query of employment numbers for construction and manufacturing jobs (by NAICS Code) was performed for the subject site. The following employment numbers were reported:

30, 45, 60-minute Drive-time Employment Count*

Business Type by NAICS Codes	Employees		
	30-min	45-min	60-min
Construction	3,988	21,387	55,817
Manufacturing	9,647	41,890	114,245
Professional, Scientific & Tech Services	1,616	14,226	59,906
Totals	**15,251**	**77,503**	**229,968**

**Source: Copyright 2022 Infogroup, Inc. All rights reserved. Esri Total Residential Population forecasts for 2022.*

Henry County target industries include low emission advanced manufacturing, food processing, and logistics. With access to a total workforce of over 937,886 which includes 229,968-plus employed in construction, manufacturing, and professional, scientific, and technical services sectors, adequate workforce availability should meet medium to large-scale project labor demands of county industry targets. Population and business summary reports are provided in **Appendix I**.

Cultural Features within three miles of the subject site that may pose community risk or public opposition to industrial development are limited and generally do not affect site permitting, construction, or facility operation. Fire and police protection and emergency medical services are within relatively close proximity of the subject site, however, located in the town of New Castle, these facilities do not pose cross-transportation risks for site construction or facility operation. A cultural features map is provided in **Appendix A**.

Schools are concentrated within the municipal limits of the City of New Castle. There are three elementary schools, one middle school, two high schools, and one day care center within three miles of the subject site. The closest in proximity to the subject site is the Tri-Elementary School and is located about 2.8 miles southeast of the subject site along IN State Road 103 (SR-103). The proximity of schools to the site should not pose any significant issues for site development, as most schools in the immediate area are located over 2 miles away. Furthermore, with truck traffic having access to a four-lane highway (SR-3), the transportation infrastructure supports efficient traffic flow and minimizes potential disruptions near school zones. Consequently, the presence of schools in the vicinity should not impede the development of the site.

Churches are largely concentrated within the municipal limits of the City of New Castle and the surrounding areas. There are thirteen churches within three miles of the subject site buildable area. All of the churches are located over a mile from the site. The nearest is The Kingdom Hall of Jehovah's Witnesses off of Indiana State Road 3 (SR-3). All local churches should be sufficiently removed from the operational footprint of the site (e.g., buildable area). As such, the site poses no significant operational proximity or transportation risks to these churches.

Cemeteries do not exist immediately proximate to the site or along principal site access routes. Two cemeteries are within three miles of the site buildable area and pose no risk to site permitting or operation.

Group Care Centers including nursing homes, assisted living centers, special education schools, crisis units, and hospice facilities do not exist immediately proximate to the site or along principal site access routes. Three assisted living facilities are located within 3 miles of the subject site. The closest facility, Glen Oaks Health Campus, is located on County Road 200 about 2.4 miles from the site.

Other Cultural Centers including libraries, museums and art galleries, movie theaters and performing arts centers, zoos and aquariums, arboreta and botanical gardens, and planetariums do not exist immediately proximate to the site. The Indiana Basketball Hall of Fame is located on

Trojan Lane in New Castle. The museum is about 2.8 miles from the site and should not pose a threat to industrial development.

Parks and Protected Lands do not exist immediately proximate to the site or along principal site access routes. Westwood Park contains INDR designated equine and biking trails located about 3.5 miles northwest of the site. This area is sufficiently removed from the operational footprint of the site (e.g., buildable area) and is buffered by agricultural and forested lands. Site ingress/egress road access does not intersect or share park access. A protected lands map is provided in **Appendix A**.

Correctional Facilities including federal, state, and local prisons and detention centers do not exist immediately proximate to the site or along principal site access routes. The Henry County Jail and the New Castle Correctional Facility are both located just north of the City of New Castle over 6 miles from the site.

Fire Protection/EMS is provided by the New Castle Fire Department located within a 3.0-mile driving distance of the site access point. The response route is roughly 5-minutes, with trucks taking S Main St to E County Rd 400 to the site. New Castle Fire Station 1 is another option located 4.4 miles and a 11-minute drive from the site with the response route running from N Main St to E County Rd 400 to the site. New Castle Fire Department 2 is also located 5.0 miles and a 10-minute drive from the site. Trucks taking this route must pass through residential areas in the city of New Castle before turning onto S 14th St (IN-103) and then E County Rd 400. Fire and EMS response time and capacity should be locally verified.

Law Enforcement is provided by the New Castle City Police Department located within 5.0 miles of the site boundary/buildable area. The response route is N Main St to E County Rd 400 and is approximately a 10-minute drive time from the site. The Henry County Sheriff's Office is located 4.3 miles and a 10-minute drive from the site access point. Law enforcement response time and capacity should be locally verified.


Hospital/Emergency Care is provided by Henry Community Health and is located 6.1 miles (~13-minute drive time) from the site via 16th St, Washington St, and IN-103 to E County Rd 400. It is an acute care hospital with 50 total staffed beds. Rush Memorial Hospital is located 20.0 miles (~26-minute drive time) from the site via IN-3 to E County Rd 400 and to the site. The hospital is a critical access hospital with 25-beds 5-clinics serving Rush County. EMS response time and capacity should be locally verified.

Historical Preservation records include locations of cultural or archaeological significance, some of which are formally designated as state and/or federally protected historical resources under State Historic Preservation Offices (SHPO) and/or National Register of Historic Places registrations. Historical resources, if located on the subject site, may alter, impede, or preclude development if potential for disturbance or encroachment exists. Historical resources located near the subject site may warrant mitigating site planning and design elements such as line-of-site buffering between facilities and a historically significant structure. The Indiana Department of Natural Resources (IDNR) houses the Division of Historic

Preservation and Archaeology (DHPA), which promotes the conservation of Indiana's cultural resources. The DHPA facilitates state and federal preservation programs and is the staff of the State Historic Preservation Office. The DHPA's Archaeology Team administers programs for protecting and preserving Indiana's prehistoric and historic archaeological sites, is the central repository of archaeological records and reports, and houses the state's official computerized database of archaeological site information.

Several cultural resource GIS datasets from the IDNR were consulted for potential location of culturally or historically significant resources on or near the subject site. These datasets are collected and contained within the State Historic Architectural and Archaeological Research Database (SHAARD), which allows users to search cultural resource information on known historic and archaeological resources throughout the State of Indiana. SHAARD includes data from the Indiana Historic Sites and Structures Inventory county survey (IHSSI), the Indiana Cemetery and Burial Ground Registry, historic bridges and canals, historic theaters, and properties listed in the National Register of Historic Places and the Indiana Register of Historic Sites and Structures. The data contained in SHAARD was collected from previously conducted cultural resource inventories, National Register nominations, and cultural resource management projects. SHAARD and associated resource maps are ongoing initiatives and are updated daily, so the absence of data does not necessarily indicate the absence of resources. A more formal archaeological survey may be necessary prior to site development.

A desktop data review was conducted regarding available records for potential cultural resources present on the subject property. *The SHAARD database identified no archaeological sites and no historic structures on the subject site. Seven cultural resources were identified within a 1-mile radius of the subject site, which are shown on the corresponding SHAARD web application map. These include one farm with a "Notable" rating, one house with a "Contributing" rating, three farms with a "Contributing" rating, and two "Demolished" historical features.* Of the seven IHSSI resources shown, one is considered "Notable". The "N" rating means that the property did not quite merit an "outstanding" rating but still is above average in its importance; further research may reveal that the property is eligible for National Register listing. Four of the resources within a mile of the subject site are rated "Contributing". The "C" rating means that the properties met the basic inventory criterion of being pre-1970 but are not important enough to qualify individually for inclusion in the National Register. Such resources are treated as important to the destiny or continuity of an area's historic fabric. Two properties were rated "D", or "Demolished", meaning they have been demolished since the original survey information was gathered.

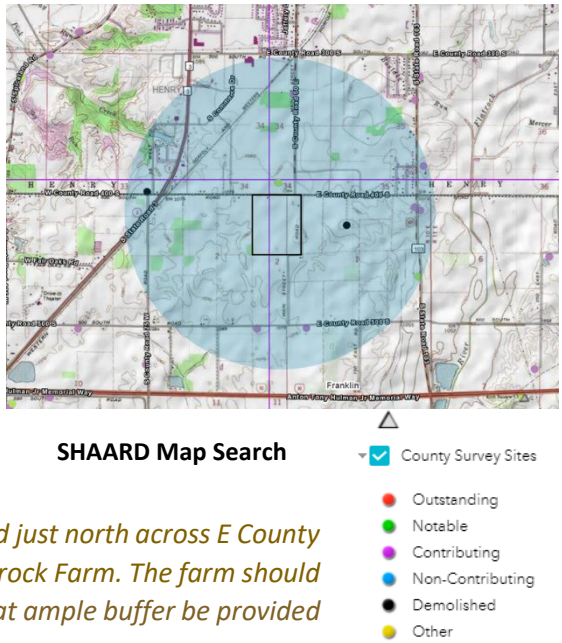

SHAARD Map Search

None of the identified cultural resources should present significant impediments to the development of the subject site. The closest feature to the subject site is located just north across E County Road 400 S and was identified as the John and Emma Rothrock Farm. The farm should not inhibit site development, though LL+D recommends that ample buffer be provided

for relief from noise and light pollution and facility line of sight from the vantage point of the farm. All other historically significant resources are located outside the 1-mile buffer surrounding the subject site boundary and are not likely to impact site development potential. The SHAARD/IHSSI Reports for both structures are provided as **Appendix K**, and the Historic Resource search map is provided as **Appendix A**.

As with any desktop research exercise, actual potential historic preservation concerns may not be fully recognized or understood without conducting an on-site field investigation. The industry standard for real estate environmental review is the Phase I Cultural Resources Survey. The primary objective of a Phase I archaeological survey is to identify and record all cultural resources within a project area. Cultural resources can include prehistoric Native American habitation sites, historic farmstead sites, standing structures, or other man-made features such as earthworks, old roadbeds, or cemeteries. The Phase I survey process typically begins with Phase IA Archaeological Reconnaissance to conduct historical research, environmental context review, and field inspection. When an archaeological site is encountered, a full written report must be submitted following guidance provided in the Current Guidebook for Indiana Historic Sites and Structures Inventory—Archaeological Sites and the Indiana Cultural Resources Manual.

Indiana Code 14-21-1 provides protection for archaeological sites and historic burial sites regardless of their location on state or private lands. All archaeological sites with artifacts dating before December 31, 1870 are protected under this act. Human burial sites are afforded protection under IC 14-21-1, IC 14-21-2, IC 23-14 (Indiana General Cemetery Act). The State of Indiana implements specialized reviews that provide protection to historic properties on state-owned or leased land or to historic properties that are listed in the National Register of Historic Places or the Indiana Register of Historic Sites and Structures and that will be altered, demolished, or removed using state funds. These review processes are established in Sections 14, 16, and 18 of Indiana Code 14-21-1. In addition, projects that will disturb the ground within 100 feet of a cemetery or burial ground for the purpose of excavating or covering the ground or erecting, altering, or repairing any structure are reviewed in Sections 26-26.5. In order to increase the confidence in understanding any potential historical preservation concerns for the subject site, it is recommended that a Phase I archaeological survey be conducted by a qualified cultural resource management/archaeological consulting professional and that archaeology state laws listed in Title 14, Article 21 of the Indiana Code are thoroughly understood. Relevant sections of the Indiana Code are provided as **Appendix K.** Information regarding Indiana Archaeology Law, complete with links to the full Indiana Code and Indiana Administrative Code, is also provided as **Appendix K.**

Education and Technical Training Assets are well positioned to serve professional and technical workforce needs of Henry County target industries, while colleges and universities provide valuable recruiting opportunities to local businesses.

INDIANA DEPARTMENT OF WORKFORCE DEVELOPMENT

WorkOne americanjobcenter INDIANA

The Indiana Department of Workforce Development (DWD) offers a variety of services to statewide job seekers looking to enter the workforce, return to the workforce, or locate education and training opportunities. These include Hoosier Talent Network, INDemand Jobs, Indiana Career Explorer, Indiana Career Connect, Cyberseek Indiana, and Indiana Career Ready. The DWD offers several services including job search help, hiring events, training grants, specialized training and more: https://www.in.gov/dwd/.

Indiana's WorkOne Career Centers are the heart of the workforce development system, providing assistance in understanding jobs in demand today, helping workers determine their interests and abilities, offering access to training opportunities, and providing information needed to succeed in today's economy. WorkOne's Job Opportunities and Business Services (JOBS) Program assists employers in locating and developing a skilled team by determining eligibility, recruiting employees, formulating WorkKeys job profiles, and providing skills assessments to identify gaps and training needs. WorkOne's WIN Career Readiness is a fundamental workplace skills training system available to Indiana residents, employers and training providers. Both the DWD's Work Opportunity Tax Credit (WOTC) and Federal Bonding Program benefits employers by offering incentives for hiring jobseekers who may traditionally have difficulty finding employment.

Next Level Jobs provides free training for Indiana workers and reimbursements for Indiana employers for training employees in high-demand fields. Next Level Jobs assists job seekers by providing Indiana residents with free training in high-growth job fields and the opportunity for them to earn a high-value certificate in one of Indiana's in-demand job fields, tuition free. Next Level Jobs assists employers with reimbursements for training their employees through the Employer Training Grant, which will reimburse an employer for up to $5,000 per trained employee who is trained, hired, and retained for six months, granting up to $50,000 per employer.

The Forge Your Path talent attraction initiative is a 9-county coalition within East Central Indiana (ECI) with a common goal to attract talent and establish the region as a place where people want to live, work, and play. Forge Your Path aims to build pride and empowerment among ECI residents, attract talented people to the area, and diversify its population.

Ivy Tech Community College is a two-year vocational/technical college with a campus in New Castle. Other locations surrounding the site within an hour drive include campuses in the cities of Anderson, Richmond, Muncie, Noblesville, and Indianapolis. Ivy Tech specializes in developing programs geared towards specific skills needed for existing manufacturers and other industries.

The site is within reach of several colleges and trade schools in the Indianapolis area, which is within an approximate 45-minute drive time. Institutions throughout the Indianapolis area and its outskirts include Indiana University–Purdue University Indianapolis, Butler University, University of Indianapolis, Martin University, Marian University's Saint Joseph's College, Lincoln College of Technology, Indiana Tech, and South College Indianapolis.

Other higher education centers within 45 miles of the subject site include Ball State University, a public research university in Muncie, Indiana, and Earlham College, a private liberal arts college in Richmond, Indiana.

The site also has access to the Cincinnati Metropolitan Area's colleges and universities, being situated within less than a 2-hour drive time. The area's top higher education institutions include the University of Cincinnati, Northern Kentucky University, and Xavier University.

Business Climate is highly favorable for bringing in quality job-creating businesses to the area. Indiana is considered one of the best states in the nation for long-term fiscal stability and low corporate income tax rates, creating a business-forward environment throughout the state. The State of Indiana's target Industries according to the IEDC include advanced manufacturing, aerospace and aviation, ag-bioscience, defense, life sciences, logistics and transportation, and technology. These industries can take advantage of existing transportation assets throughout the state and county to serve an array of unique business logistical needs. The following target industries are listed by Henry County officials: low emission advanced manufacturing, food processing, and logistics.

Henry County has a civilian labor force of 21,014 and an unemployment rate of 5.5%. Business development and assistance is provided locally by the New Castle-Henry County Economic Development Corporation.

Local incentives include real and personal tax abatement, infrastructure assistance, foreign trade zone alternative framework, permit assistance, and reduced price/free land. Additionally, Tax Increment Financing (TIF) for economic development revenue bonds is an available method of facilitating development or redevelopment for a business by utilizing future tax revenues to pay for necessary improvements.

The Enterprise Loan Fund, designed to support retention and expansion of existing business as well as creation of new business opportunities within Henry County, is offered by New Castle-Henry County Economic Development Corporation. The Enterprise Loan Fund offers three basic loan types that focus on the creation of new business start-ups, business retention/expansion, and capital formation.


The New Castle-Henry County Economic Development Corporation helps existing businesses grow by assisting with relocation, permits, job resources, and networking opportunities. Purdue's Technical Assistance Program (TAP) provides support to the state's manufacturing sector, and businesses can access up to 40 hours of assistance through this initiative. Henry County has resources to assist new and existing companies with international commerce as well.

In addition, the IEDC provides a variety of programs and initiatives offering business support and expertise to companies that are investing and creating jobs in Indiana. These include the Indiana Regional Cities Initiative, Certified Technology Park program, Broadband Ready Communities program, and Next Level Roads program.

The State of Indiana offers a variety of incentives for all types of businesses, including targeted industries, workforce training, infrastructure and special opportunity incentives. Indiana's business tax structure is competitive—the corporate income tax is decreasing to 4.9%, and the state offers many business tax incentives, corporate tax credits and economic development programs. Statewide incentives include the Community Revitalization Enhancement District (CRED) Tax Credit, Data Center Gross Retail and Use Tax Exemption, Economic Development for a Growing Economy (EDGE) Tax Credit, Industrial Grant Fund

(IDGF), Tax Exemption for Patent-derived Income, Skills Enhancement Fund (SEF), Venture Capital Investment Tax Credit program, Hoosier Business Investment (HBI) Tax Credit, Research Expense Credits, Research and Development Sales Tax Exemption, and Redevelopment Tax Credit (RTC).

Political Climate is strong according to interviews with local officials, and the community is largely in favor of commercial/industrial business development to bring long-term economic growth to the area.

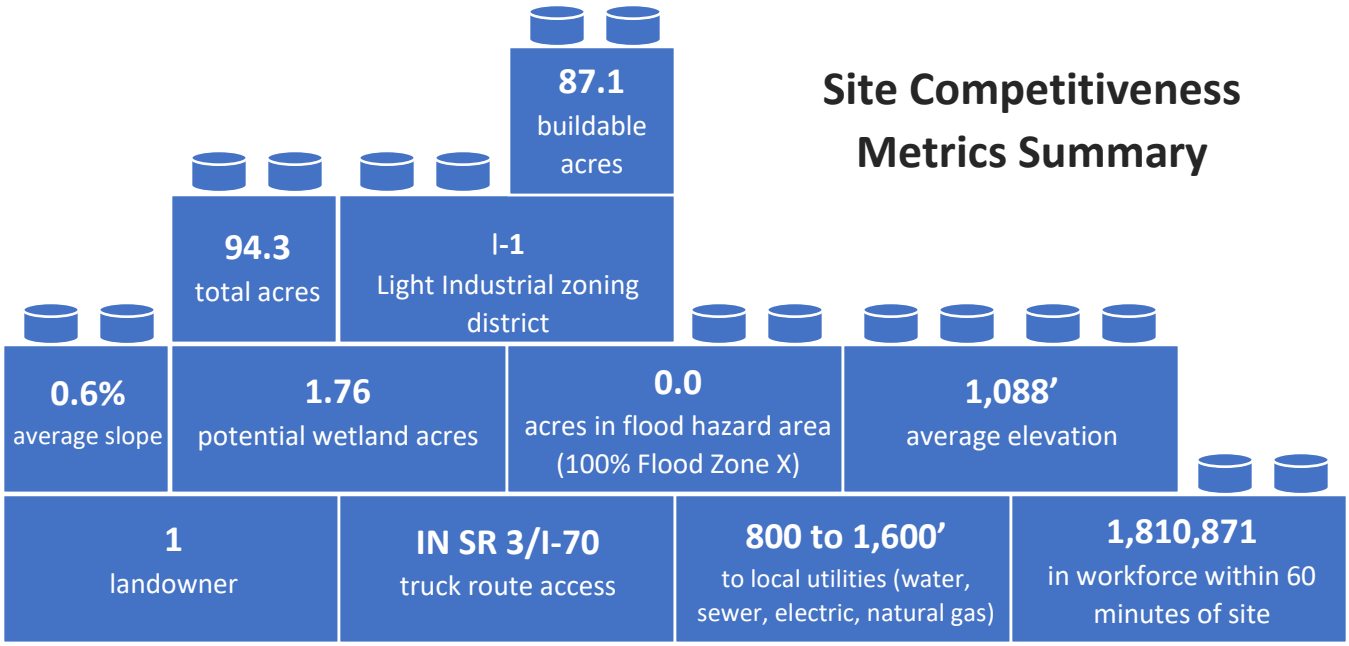

Site Competitiveness Report Card

The Site Competitiveness Report Card is an indicator of favorable development conditions across customary competitiveness factors. A relative score for each factor is given as a letter grade, akin to a 4.0 education grade point average (GPA). The GPA is calculated for each competitiveness area: Condition, Connection, and Community with an overall site GPA derived as a relative indicator of site competitiveness for an economic development land use.

Competitiveness Driver		
Condition	Comments	4.0
Engineering		
Elevation/Slope		A
Flood Risk		A
Buildable Configuration		A
Land Cover		A
Environmental/Cultural Resource		
Potential Wetlands		A-
Legacy Environmental Liabilities		A
Potential T&E Risk		A
Connectivity		3.3
Transportation		
Interstate		A
Multi-lane Truck Route		B
Class I Rail		N/A
Airport (passenger)		B
Airport (cargo)		B
Seaport/Inland Port		N/A
Utilities		
Potable Water		B
Sewer/Wastewater Treatment		B
Natural Gas		B
Electric		A
Broadband/Fiber		A
Community		4.0
Cultural		
Compatibility with Surrounding Land Use		A
Community Acceptance		A
Economic		
Market Vitality		A
Tax Incentives		A
Labor		
Workforce		A
Wage Competitiveness		A
Political		
Permitting Expediency		A
Business Climate		A

Site GPA



Rough Order-of-Magnitude Site Development Cost Summary

A rough order-of-magnitude (ROM) cost estimation was conducted to calculate potential site development costs for pre-construction site preparation and utility and transportation infrastructure improvements. The estimation specifically focuses on the 87.1-acre buildable area of the site. Detailed ROM cost tables are provided below to give a general understanding of the projected expenses.

Notes:

- *Does not include costs for engineering, permitting, or general project management.*
- *This cost estimate was prepared with the best information available at the time of analysis.*
- *Actual costs can vary based on availability of material, site conditions, and labor.*
- *ROM costs generated from GIS data and use of RSMeans construction cost estimating software.*

ROM Costs for 18065-040 Buildable Area (87.1 acres)

Project: 18065-040
Location: Henry County, IN

WORK ACTIVITY	QUANTITY	UNIT	UNIT COST	SUBTOTAL	TOTAL
ON-SITE PREPARATION					
Site Clearing					
Mobilization	1.00	EA	$80,000.00	$80,000.00	
Demolition (Structure)	4.00	EA	$25,000.00	$100,000.00	
Clearing	14.50	AC	$2,500.00	$36,250.00	
Topsoil Strip/Cut	75020.00	CY	$2.31	$173,296.20	
Total Site Clearing				$389,546.20	$389,546.20
Grading Cut					
Earth Cut	215000.00	CY	$3.50	$752,500.00	
Total Grading Cut				$752,500.00	$752,500.00
Grading Fill					
Earth Fill	215000.00	CY	$3.50	$752,500.00	
Total Grading Fill				$752,500.00	$752,500.00
Other Preparation					
Fine Grading (Building)	0.00	SY	$1.45	$0.00	
Fine Grading (Non-Building)	0.00	SY	$0.95	$0.00	
Erosion Control	9.45	AC	$2,500.00	$23,616.85	
Seeding	10.00	AC	$1,250.00	$12,500.00	
Total Other Preparation				$36,116.85	$36,116.85
				TOTAL	**$1,930,663.05**
OFF-SITE IMPROVEMENTS					
Lift Station Upgrade (potential offsite pump upgrade)	1.00	EA	$250,000.00	$250,000.00	
Total Utilities				$250,000.00	$250,000.00
Road Improvements					
Turning Lane Left (300')	1.00	EA	$213,137.41	$213,137.41	
Turning Lane Right (300')	1.00	EA	$205,783.26	$205,783.26	
Total Road Improvements				$418,920.68	$418,920.68
				TOTAL	**$668,920.68**

ROM Costs for 18065-040 Buildable Area (87.1 acres)

Project:	18065-040				
Location:	Henry County, IN				
ON-SITE IMPROVEMENTS					
Paving - Asphalt					
Asphalt Paving - Drives (Light Duty)	0.00	SY	$19.06	$0.00	
Asphalt Paving - Drives (Heavy Duty)	29700.00	SY	$28.26	$839,396.25	
Total Paving - Asphalt				$839,396.25	$839,396.25
				TOTAL	**$839,396.25**
UTILITIES & DRAINAGE					
Water	1900.00	LF	$185.00	$351,500.00	
Sewer	10950.00	LF	$165.00	$1,806,750.00	
Sewer Lift Station	1.00	EA	$300,000.00	$300,000.00	
Subsurface Drainage	1100.00	LF	$140.00	$154,000.00	
Drainage Outfall	3.00	EA	$100,000.00	$300,000.00	
3 Phase Electrical	1100.00	LF	$189.00	$207,900.00	
Total Utilities				$3,120,150.00	$3,120,150.00
				TOTAL	**$3,120,150.00**
WETLAND MITIGATION(optional)					
Compensatory Mitigation (unverified)	0.00	AC	$109,200.00	$0.00	
Total Mitigation (not indluding contractor costs)				$0.00	$0.00
				TOTAL	**$0.00**
				SUB-TOTAL	**$6,559,129.98**
			Construction Contingency	10%	$655,913.00
			Total Cost Estimate For Site Construction w/o Mitigation		**$7,215,042.97**
			Total Cost Estimate For Site Construction with Mitigation		**$7,215,042.97**
SOFT COSTS					
Engineering				6.00%	$432,902.58
Surveying & Staking				2.50%	$180,376.07
Testing & Inspecting				1.00%	$72,150.43
Construction Management				4.75%	$342,714.54
Developer Fee				5.00%	$360,752.15
Studies					$200,000.00
				TOTAL	**$1,228,143.62**
				Total Cost Estimate For Site	**$8,443,186.60**

**ROM costs are intended to estimate the rough order of magnitude costs to bring the site to a project construction ready PAD (potential area of development) with utilities, entrances, off-site improvements, drainage, and grading. This does not include any project specifics regarding design, facilities, construction within the PAD, impact fees, regulatory requirements, entitlement costs, etc. These costs were based on information provided within the report and assume an ~87.1-acre PAD (excluding required open space, buffers, storm water management, and site access).*

Site Competitiveness Opinion

Overall, the Dishman Rothrock Site in Henry County is a competitive greenfield site that is a good prospect for light industrial and advanced manufacturing project opportunities.

The site has several competitive features that position it as a strategic real estate asset to support economic development. Firstly, the site is within proximity to all major utilities including electricity, natural gas, wastewater & sewer, potable water, and broadband/fiber. A few improvements are needed: natural gas needs a 1,600' extension to reach the site via a 6" PE medium pressure line and water and sewer systems need improvements and extensions to make them accessible to the site. One of the site's key strengths is its well-defined and contiguous 87-acre pad with mostly flat terrain, minimal flood risk, no significant hydrography features, and few wetlands throughout the buildable area. Moreover, the site is appropriately zoned for light industrial use and situated in an area that supports industrial and manufacturing projects. The presence of neighboring manufacturing plants, such as Boar's Head and TS-Tech, further enhances its appeal as an expanding industrial hub. In terms of transportation, the primary access road, E County Road 400 S, provides connectivity to Indiana State Road 3 (SR-3), a major four-lane arterial highway, and subsequently to Interstate 70 (I-70). This facilitates efficient truck traffic flow, enabling easy access to Indianapolis and Dayton, with multiple interstates and truck routes available. Furthermore, within a 60-minute drive, the site taps into a skilled workforce of over 1.8 million people, thanks to its proximity to Indianapolis and Dayton. Another favorable aspect is the proactive support from the Henry County community and political leadership, who actively promote business growth and job creation, fostering a business-friendly environment conducive to project investment.

Some challenges for the site also exist, including poor on-site soil conditions and needed improvements for utility infrastructure. As of the date of this report, both water and sewer systems need improvements and extensions to make them accessible to the site. The Preliminary Planning Opinion of Probably Construction Cost is estimated at $2,680,000.00, encompassing improvements for both the sanitary sewer and water systems. The above improvements would require permitting, which would include INDOT, IDEM, and Henry County. An existing natural gas pipeline also needs to be extended 1,600 feet to the site for access. Another potential challenge for the site is poorly draining soils found throughout nearly 88% of the property. Substantial foundation requirements may not be supported by site soil conditions and must be determined through on-site geotechnical engineering investigation. Overcoming these limitations may require major soil reclamation, special design, and/or high-cost installation procedures.

Considering the comprehensive analysis presented in the SSI Phase II Report, LL+D believes that the Dishman Rothrock Site holds national competitiveness for attracting high-quality, job-producing light industrial and advanced manufacturing projects to Henry County. The site's advantages, including utility availability, proximity to interstates, a substantial regional workforce, and strong community and political support, position it as a prime location for development.

Subject Site Key Facts

Advantages	Disadvantages
A regular-shaped buildable area of approximately 87 contiguous acres is available.	Utility Infrastructure is for the subject site is generally favorable, although some improvements and extensions are necessary. Both water and sewer systems need improvements and extensions to make them accessible to the site. The Preliminary Planning Opinion of Probable Construction Cost is estimated at $2,680,000.00, encompassing the improvements for both the sanitary sewer and water systems. An existing natural gas pipeline also needs to be extended 1,600 feet to the site.
The site is flat with minimal changes in elevation and an average slope of 1%. It has low flood risk, no recorded or observed hydrography features, and minimal wetlands across the entirety of the buildable area.	
Henry County community and political leadership are strong proponents of business growth and new job creation creating a business climate highly conductive to project investment.	According to the SSURGO Hydrologic Soil Group map, 48.5% of the total site has soils estimated to have hydric components.
The surrounding land use is ideal to support the development of light industrial and advanced manufacturing project land uses.	Soil suitability properties for small commercial building construction across 88.1% (82.9 acres) of the subject site are indicated as "Very limited" for shallow (2-feet deep) reinforced concrete spread footings. Substantial foundation requirements may not be supported by site soil conditions and must be determined through on-site geotechnical engineering investigation. Overcoming these limitations may require major soil reclamation, special design, and/or high-cost installation procedures.
The site is within close reach of interstate access (I-70) via a four-lane state highway (IN SR-3) for truck traffic ingress/egress.	
Henry County RDC holds an exclusive real estate option for $22,340 per acre and will execute the option prior to April 2023.	
The site has recently been re-zoned from Agricultural to Light Industrial.	
Access to surrounding labor markets at competitive wage rates is well within reach of the subject site.	
There is a high workforce population relative to other counties in Indiana, with greater than 1,800,000 within a 60-minute drive time of the site.	

Purpose and Use of Study

Sites originating from Phase I have demonstrated qualitative compliance with engineering. environmental, infrastructure, and cultural location criteria. That said, in order to develop an actionable understanding of true site competitiveness, a more detailed study of the subject site is required. SSI Phase II: Preliminary Due Diligence is designed for this purpose.

Purpose

The purpose of the SSI Phase II study is to provide an understanding of the subject site's advantages and challenges in conjunction with a ROM cost estimate to improve site functional use and mitigate development challenges. The SSI Phase II study is a desktop-based preliminary due diligence exercise performed by discipline-specific experts with experience in industrial and commercial property development. Study of the subject site's physical and surrounding characteristics, assets, and impediments for development are reviewed in sufficient detail to formulate a defendable opinion on the competitive value of the property for economic development.

Use

There are three primary intended uses of an SSI Phase II report: (1) site advancement decision support; (2) consideration for investment in site improvements; and (3) site marketing. Each intended use is discussed below.

Site Advancement Decision

The SSI Phase II study is designed to provide decision support for the advancement of sites to market though the landowner engagement process. SSI Phase II findings serve as an indicator for the likelihood the subject site will survive the intensive scrutiny of formal, field-based engineering and environmental due diligence. Detection of severe site deficiencies or encumbrances, often referred to as fatal flaws, during desktop preliminary due diligence can avoid expenditure of significant resources in subjecting sites with little chance of survival to formal due diligence. Short of fatal flaws, SSI Phase II may reveal less than ideal conditions or less severe yet concerning challenges that can marginalize site competitiveness or be detrimental to business attraction, respectively. The most important use of the SSI Phase II study is to ensure confidence in the decision to advance sites to market graduation through subsequent phases for landowner engagement and formal due diligence. *Ultimately, site advancement decisions should be tempered by local industry targets and the host community's real estate needs to support those targets.*

Site Improvement Investment Considerations

The findings of the Phase II study, along with an estimate of the ROM costs needed to make functional site and infrastructure improvements, provides concrete data for Economic Development Offices (EDOs) to consider while making investment decisions to improve site marketability. There may be strong business cases for increasing site competitiveness by making incremental investment in infrastructure improvements or mitigation of development challenges. There are many conditions to be considered in investing significant dollars on speculative site improvements including market, economic, fiscal, real

estate, and political factors. While the information provided through the SSI Phase II study should not be exclusively considered for site improvement expenditures, the findings may provide an initial quasi prospectus on site development expenditure and associated return-on-investment (ROI).

Site Marketing

The best greenfield site in America is of no consequence to the host community if industry prospects are unaware of its value and availability. Many EDOs invest in branding and marketing campaigns to showcase their community's differentiating attributes to attract business investment. If prematurely launched, many communities unfortunately become "the dog that caught the car". The well-qualified community successfully attracts the serious interest of a prospective company only to lose the project, and possibly credibility for future projects, because it fails to offer a competitive site.

It is the opinion of LL+D, based on extensive industrial and commercial site selection experience, that the methodology, objectivity, and level of detail and completeness provided in this report are sufficient to support the competitive claims of the subject site for its intended project land use(s). Accordingly, the information contained in this report can and should be used to supplement site marketing materials, specifically for RFI responses and proactive target industry solicitations. However, EDOs should exercise judicious use of SSI Phase II site information for the purposes of site marketing in advance of formal landowner engagement and security of real estate purchase opinion. The real estate purchase option is pursued during SSI Phase III: Landowner Engagement.

Warranty

All Phase II project tasks are intended to serve as an informed guide to determination of site advancement to the formal due diligence phase of inventory development. All information and opinions provided in this report are limited to planning-level engineering and environmental considerations and do not rise to the investigative level of study for site design uses.

All data used in this study originates from public domain sources. All findings derived from the use of public domain data are subject to potential errors and omissions inherent digital data sets which may include spatial and attribute accuracy, completeness, and currency. Data and other information cited in this study has not been verified for quality of accuracy. As such, the confidence in findings provided herein and corresponding opinions are subject to the limitations of the data and other information sources consulted in the conduct of this study.

Ultimate site development potential and fatal flaw analysis cannot be determined without physically visiting the site and conducting formal engineering and environmental due diligence. However, Leotta Location and Design is confident that our site screening methodology is highly effective in eliminating low quality or practically undevelopable sites and presents candidate sites with a high likelihood of confirming results through more formal engineering and environmental due diligence.

APPENDIX A


SITE MAPS

SSI Phase II: Preliminary Due Diligence

Henry County, Indiana

Site ID: 18065-040 (94.3 acres)

New Castle Henry County Economic Development Corporation

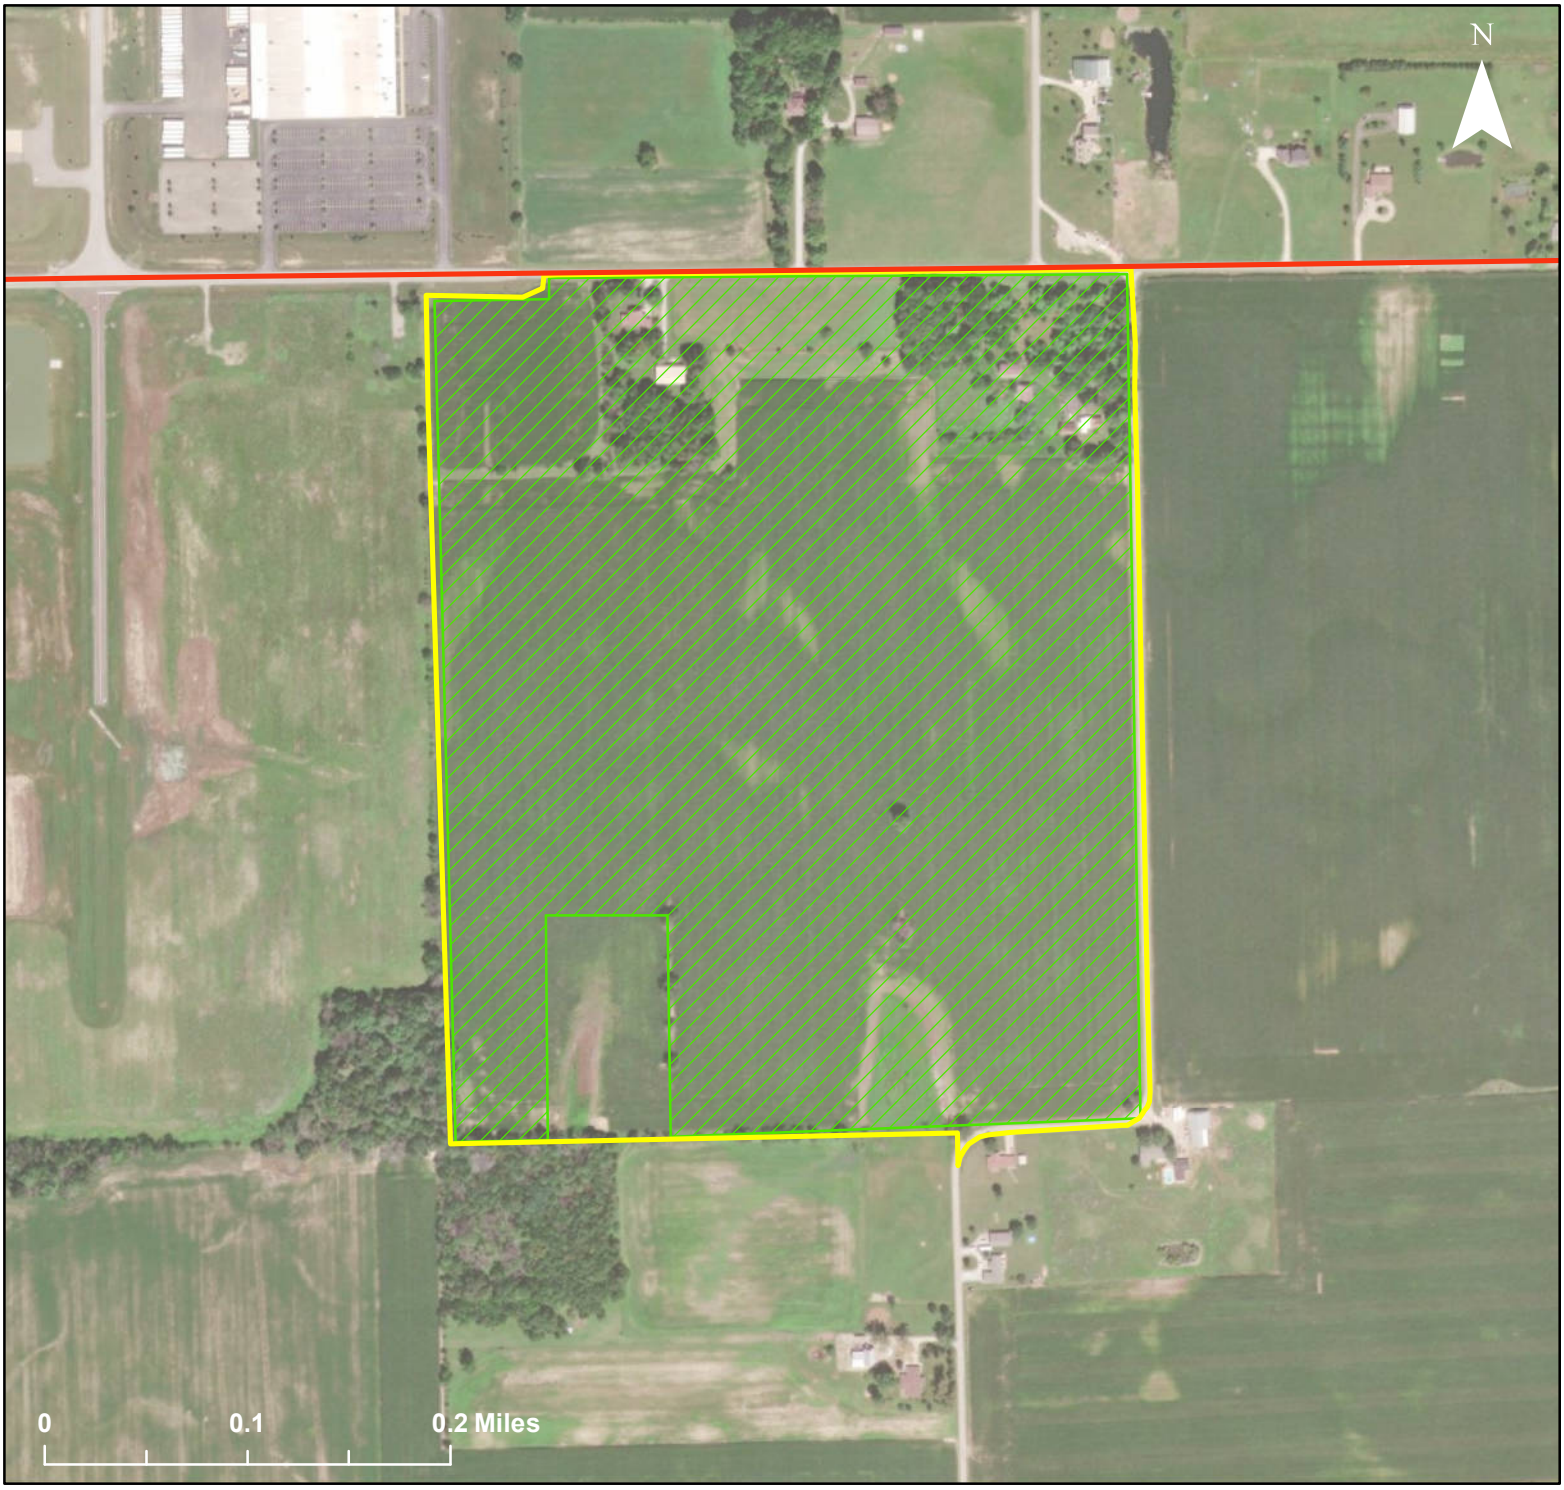

Legend

- E County Rd 400 S
- Site Boundary
- Buildable Area

SITE MAP

Site: ~94.3 acres

Buildable Area : ~87.1 acres

SSI Phase II sponsored by: HOOSIERENERGY


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Henry County, Indiana

Site ID: 18065-040 (94.3 acres)

New Castle Henry County Economic Development Corporation

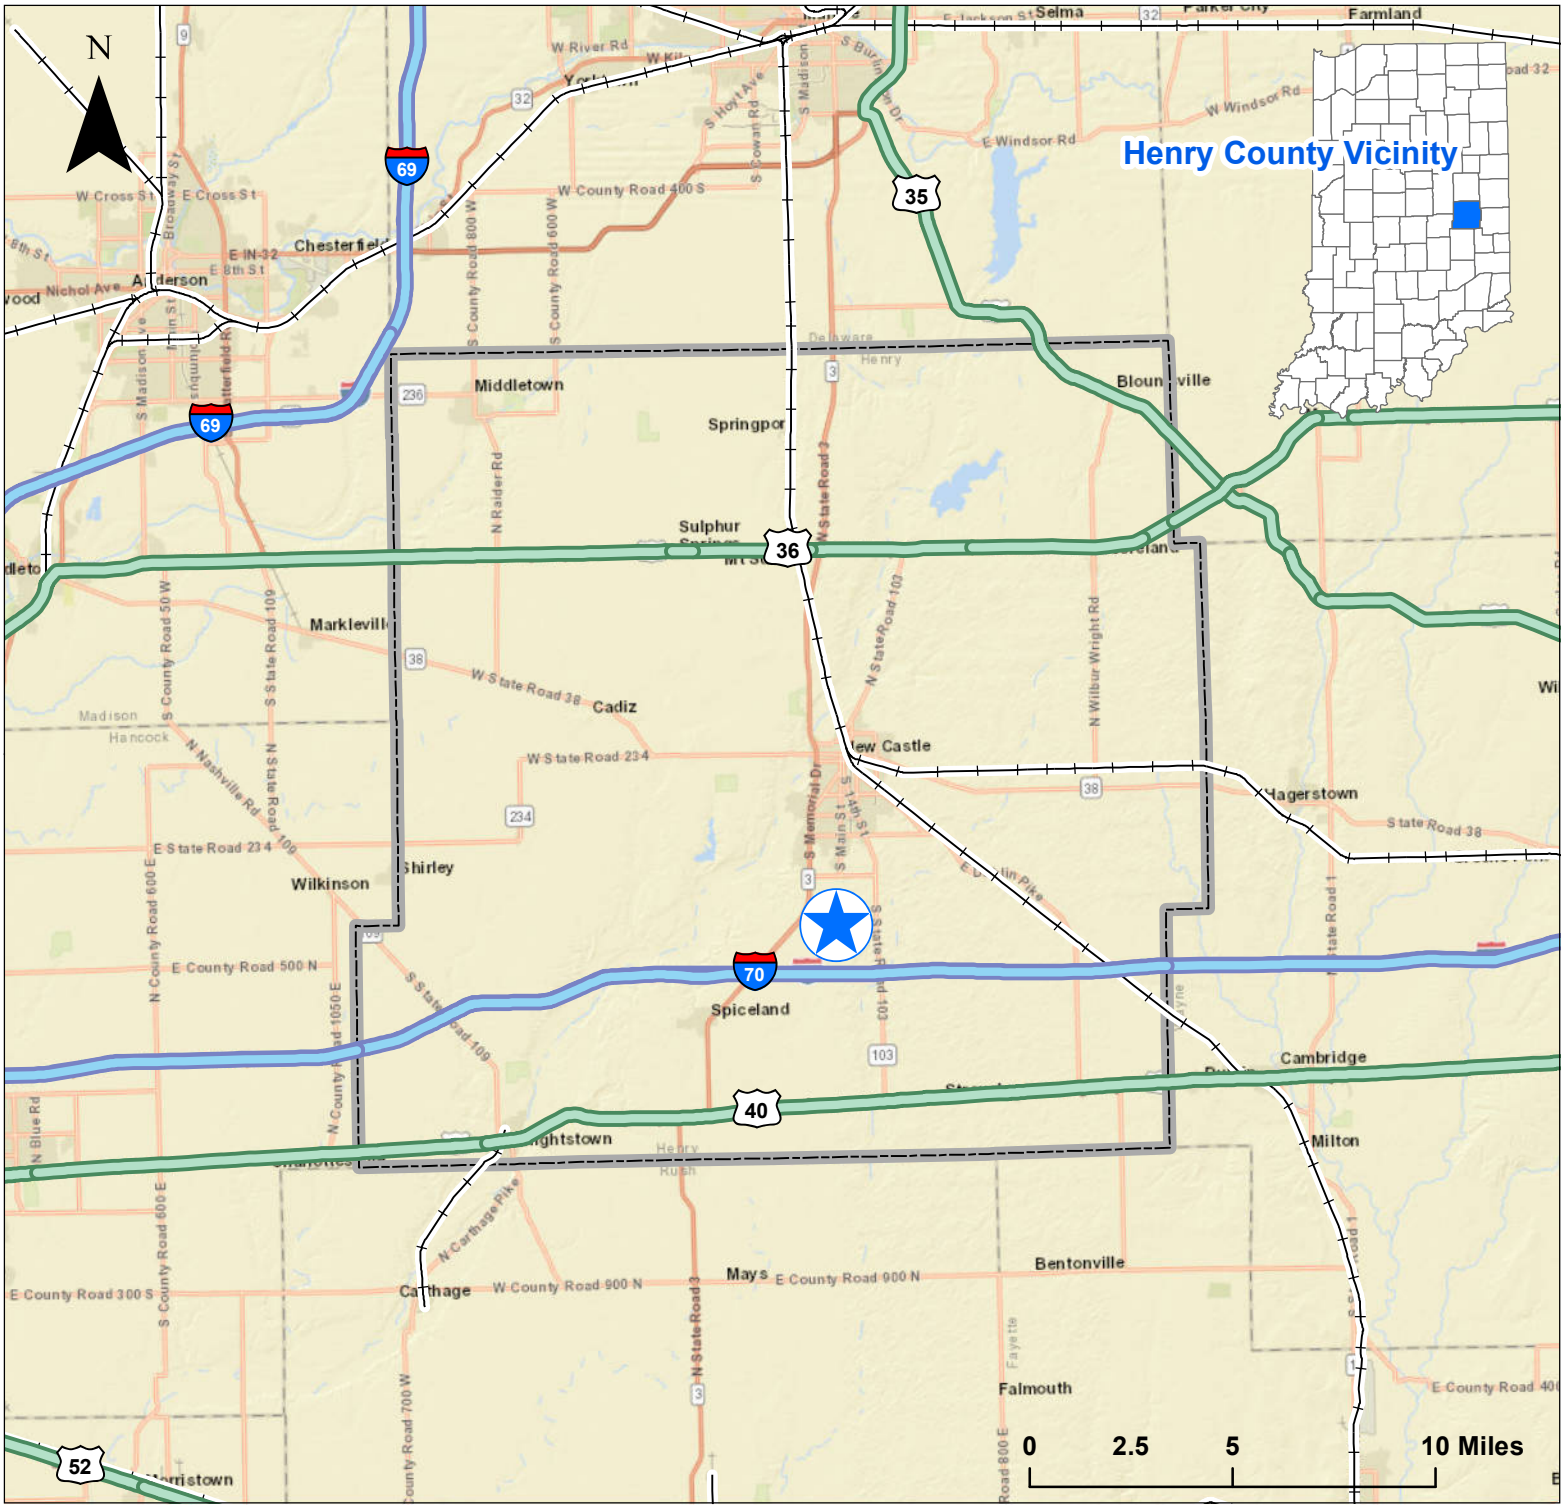

Legend

- Site Point
- Interstate
- U.S. Highway
- Class I Railroad
- Henry County

SITE VICINITY

Henry County, Indiana

SSI Phase II sponsored by: HOOSIERENERGY


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Henry County, Indiana

Site ID: 18065-040 (94.3 acres)

New Castle Henry County Economic Development Corporation

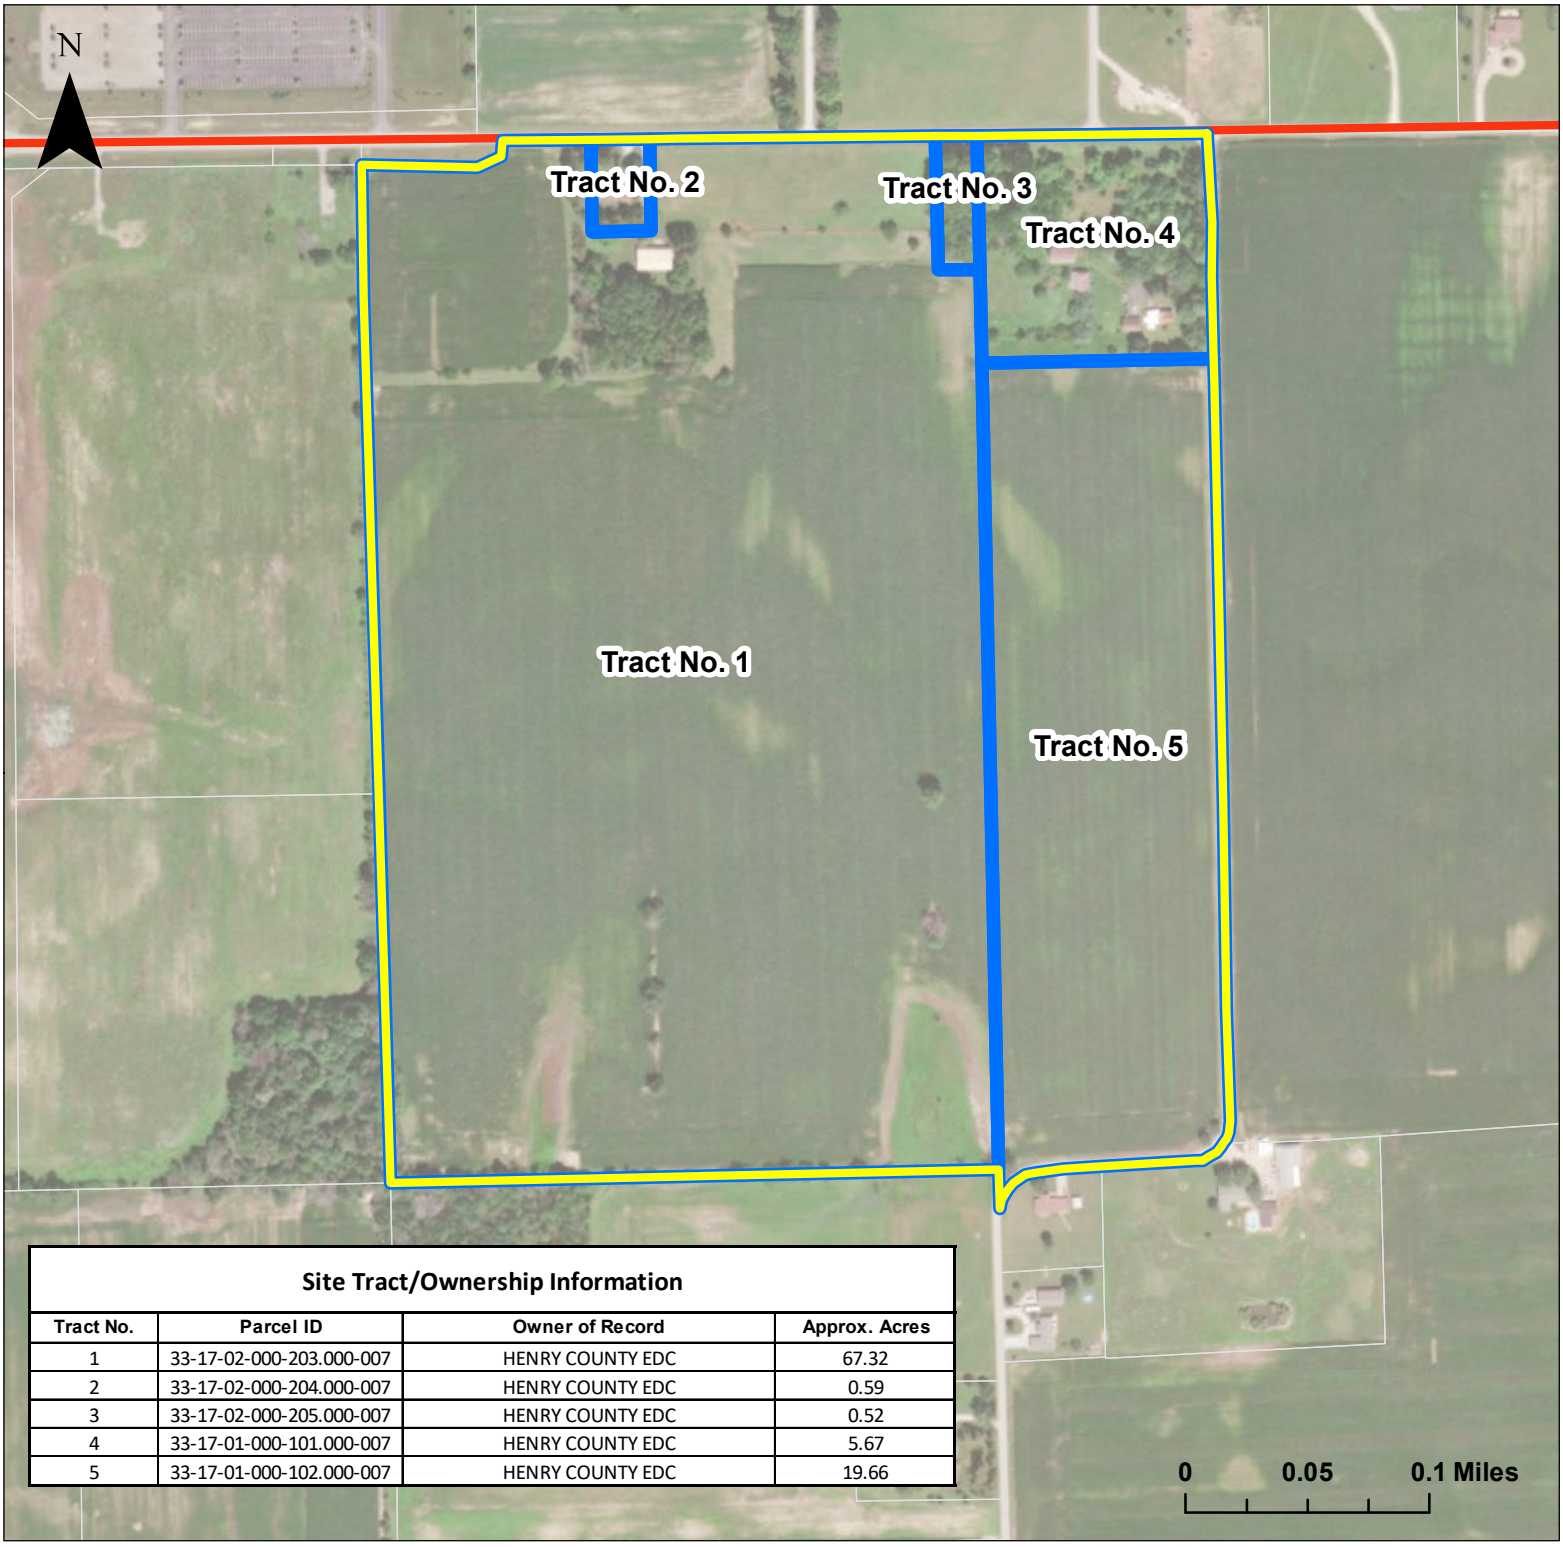

Site Tract/Ownership Information

Tract No.	Parcel ID	Owner of Record	Approx. Acres
1	33-17-02-000-203.000-007	HENRY COUNTY EDC	67.32
2	33-17-02-000-204.000-007	HENRY COUNTY EDC	0.59
3	33-17-02-000-205.000-007	HENRY COUNTY EDC	0.52
4	33-17-01-000-101.000-007	HENRY COUNTY EDC	5.67
5	33-17-01-000-102.000-007	HENRY COUNTY EDC	19.66

Legend

- E County Rd 400 S
- Site Boundary
- Site Parcel
- Parcel

SITE PARCEL CONFIGURATION

SSI Phase II sponsored by: HOOSIERENERGY


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Henry County, Indiana

Site ID: 18065-040 (94.3 acres)

New Castle Henry County Economic Development Corporation

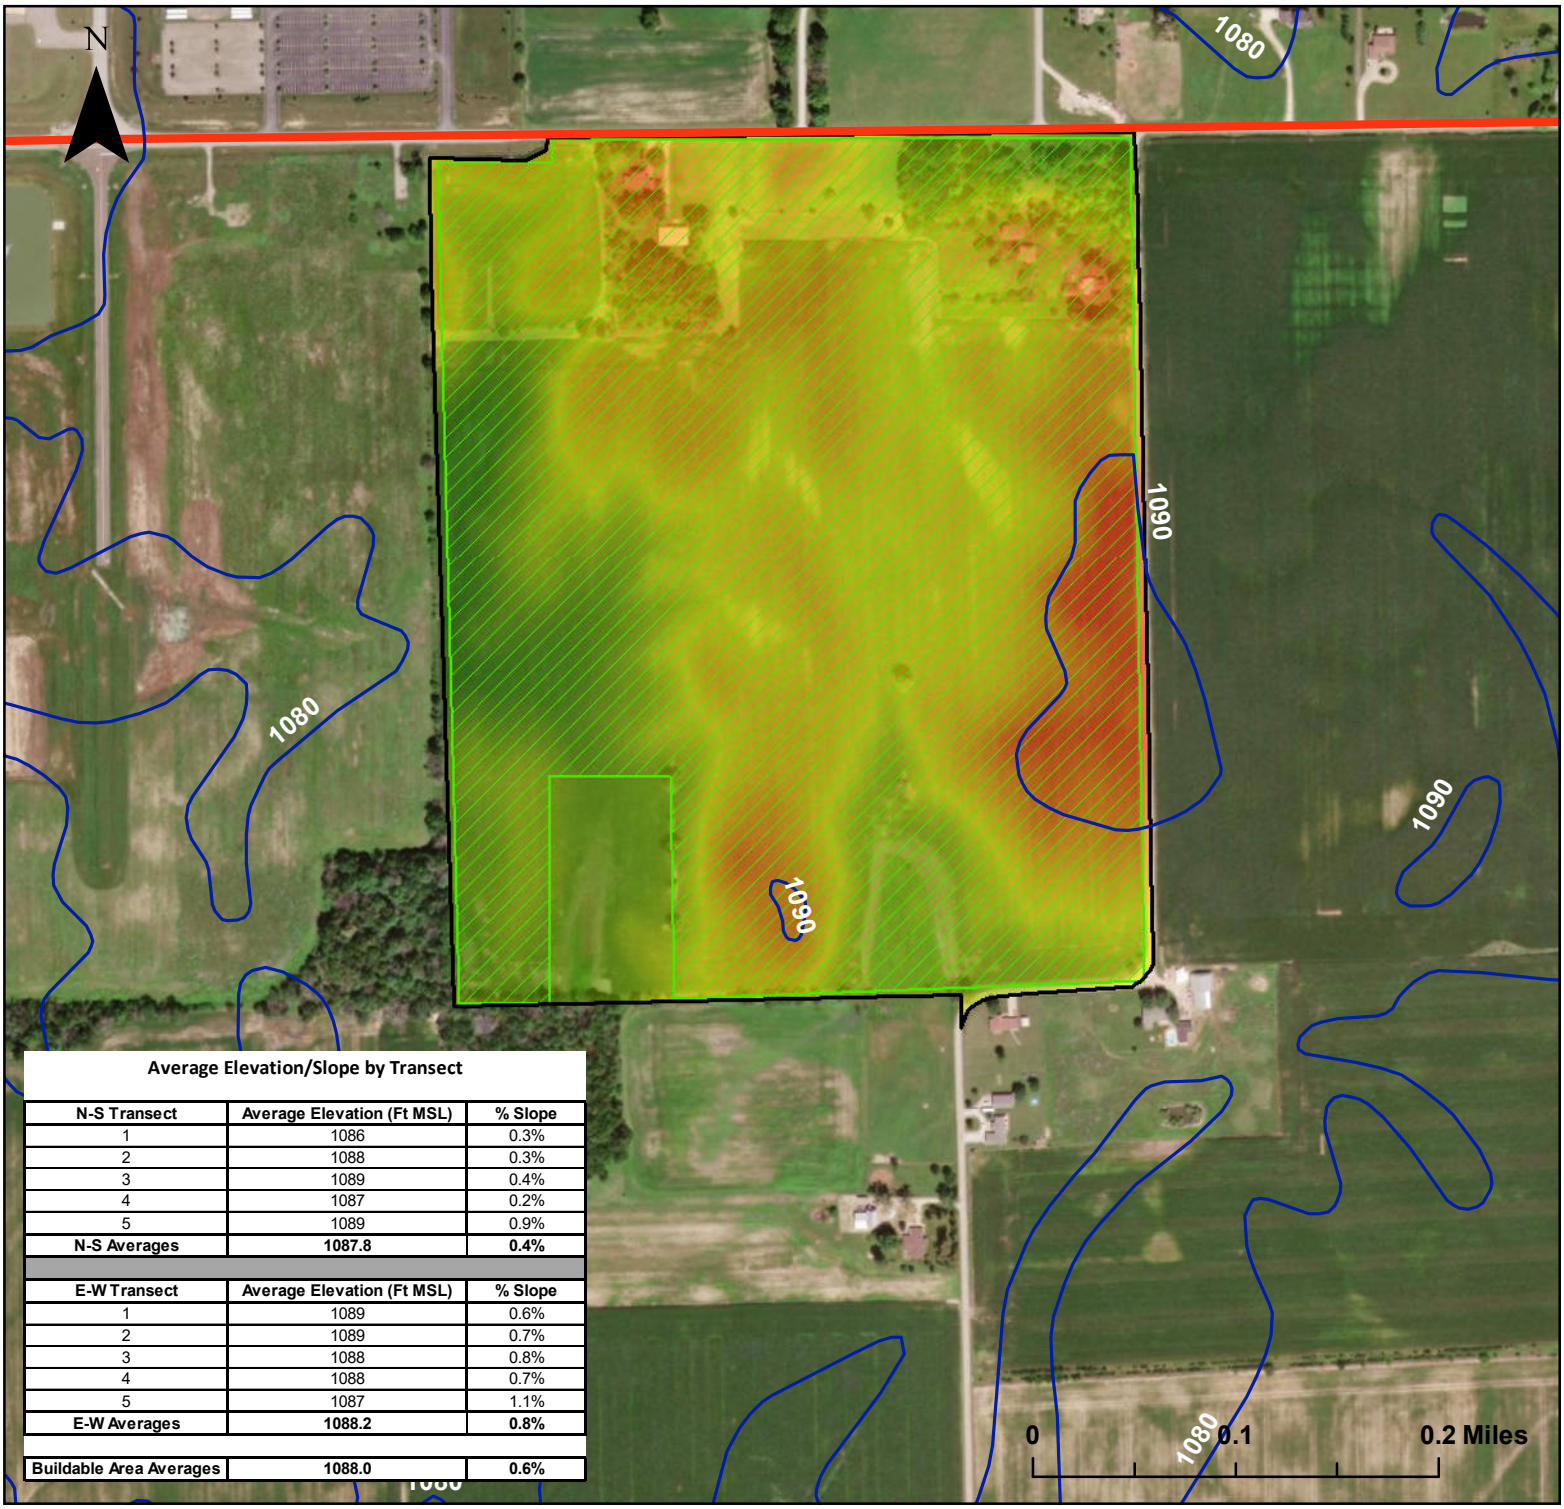

Average Elevation/Slope by Transect

N-S Transect	Average Elevation (Ft MSL)	% Slope
1	1086	0.3%
2	1088	0.3%
3	1089	0.4%
4	1087	0.2%
5	1089	0.9%
N-S Averages	**1087.8**	**0.4%**
E-W Transect	**Average Elevation (Ft MSL)**	**% Slope**
1	1089	0.6%
2	1089	0.7%
3	1088	0.8%
4	1088	0.7%
5	1087	1.1%
E-W Averages	**1088.2**	**0.8%**
Buildable Area Averages	**1088.0**	**0.6%**

Legend

- E County Rd 400 S
- Site Boundary
- Buildable Area
- Contours - 10 ft

LiDAR-derived DEM

- High : 1,091.8'
- Low : 1,079.1'

BUILDABLE AREA ELEVATION/SLOPE

LiDAR-derived Digital Elevation Model

SSI Phase II sponsored by: HOOSIERENERGY


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Henry County, Indiana

Site ID: 18065-040 (94.3 acres)

New Castle Henry County Economic Development Corporation

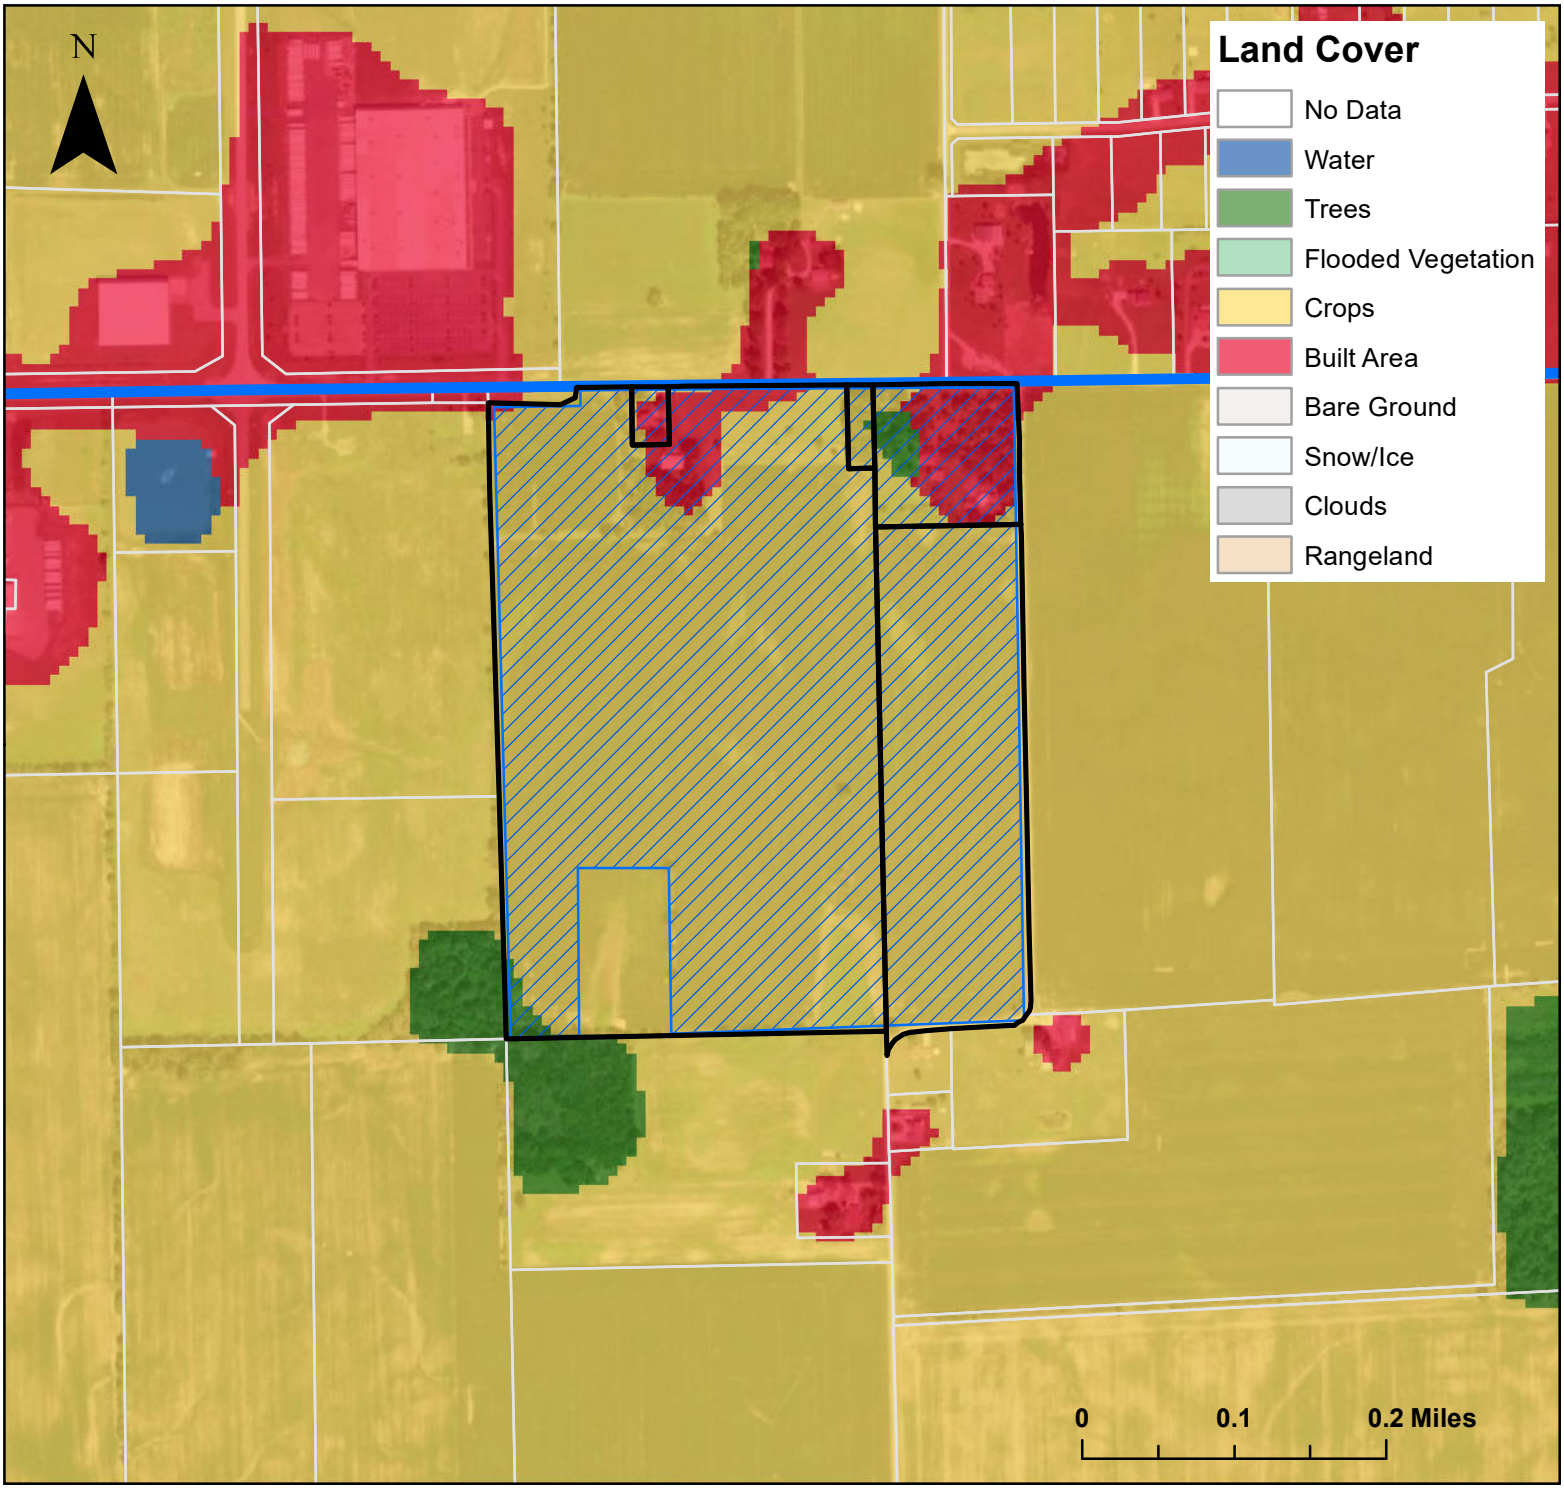

Legend

- E County Rd 400 S
- Site Boundary
- Buildable Area
- Parcel

LAND COVER CLASSIFICATIONS

Indiana 2017-2021 Land Cover Map

SSI Phase II sponsored by: HOOSIERENERGY


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Henry County, Indiana

Site ID: 18065-040 (94.3 acres)

New Castle Henry County Economic Development Corporation

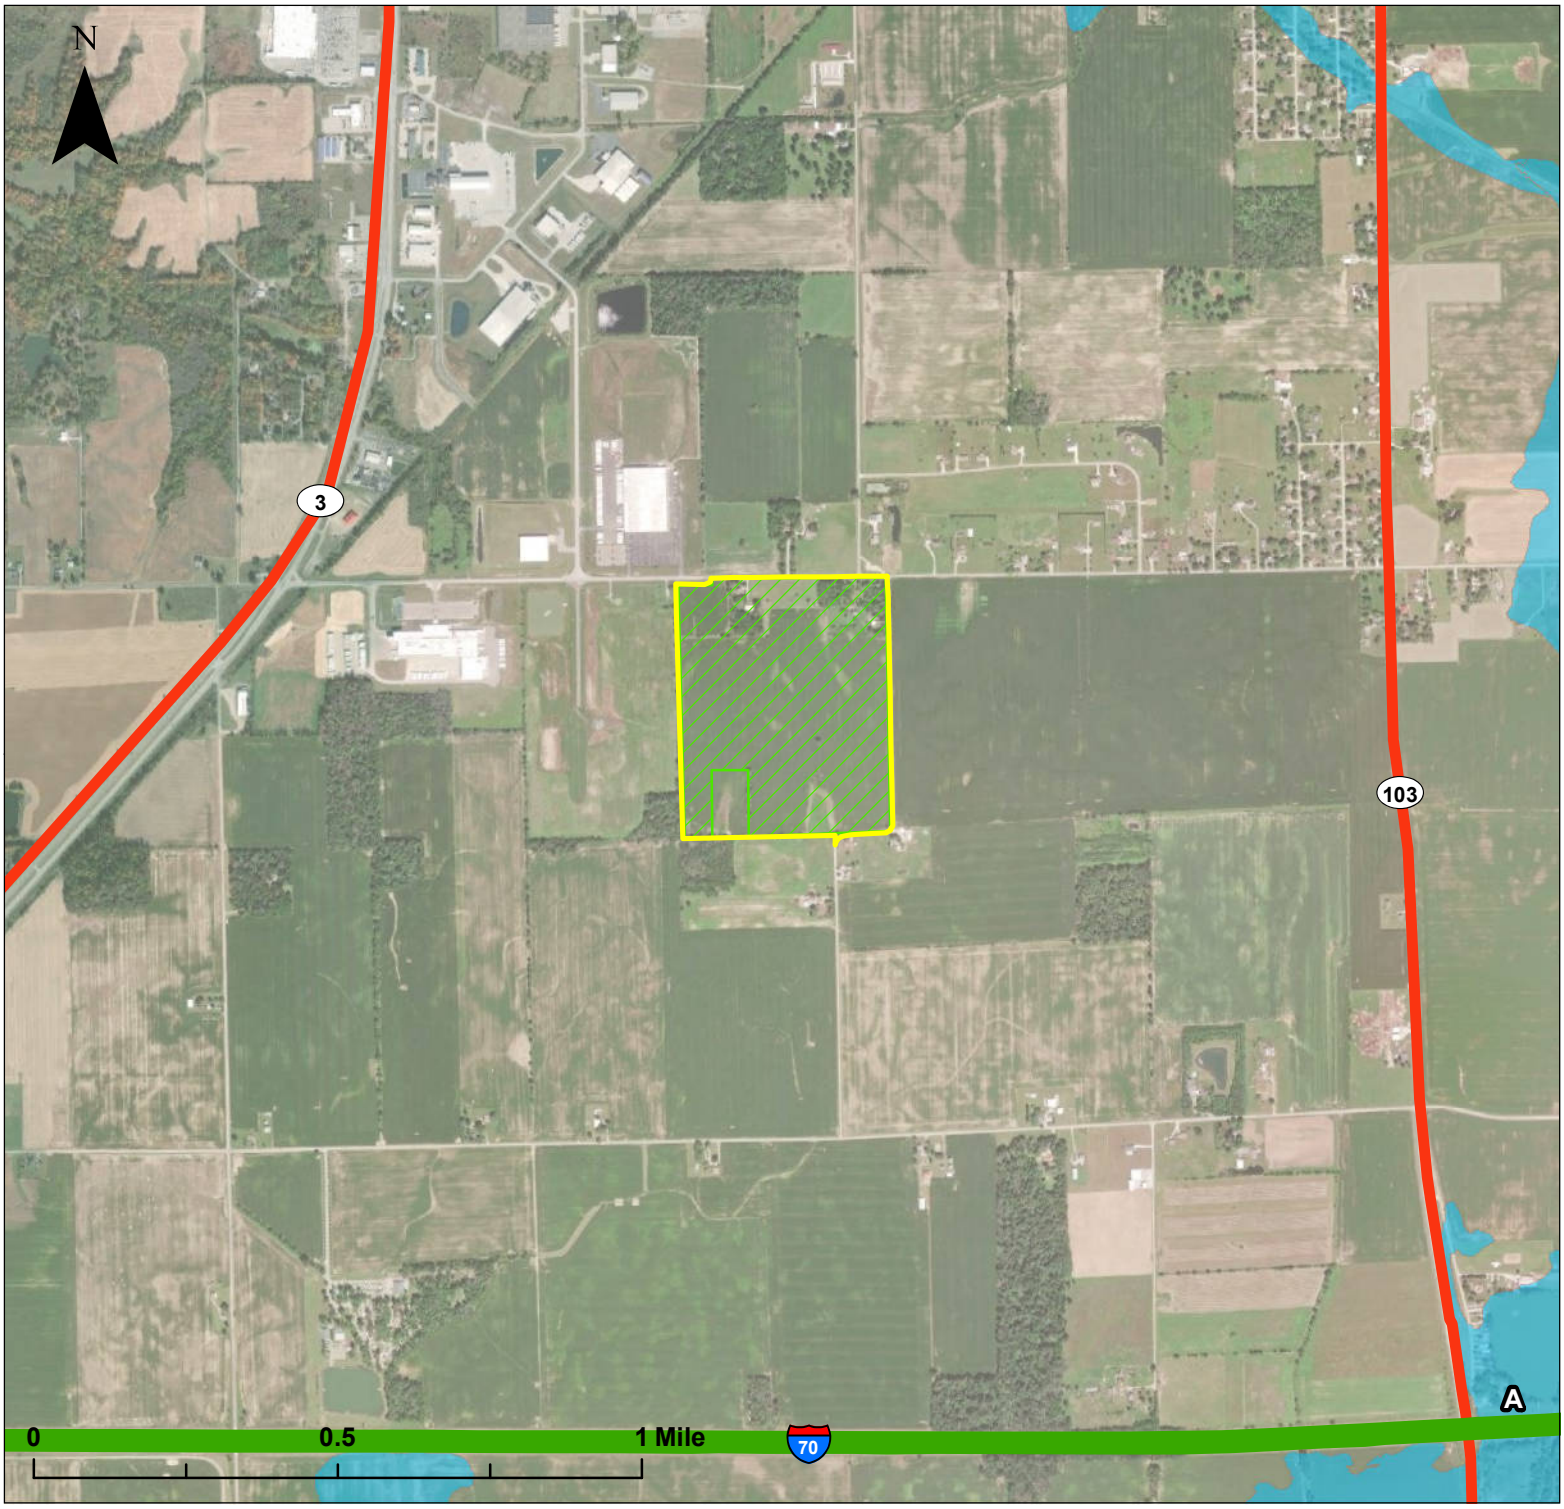

Legend

- Interstate
- State Highway
- Rail
- Site Boundary
- Buildable Area

Flood Zone

- A
- X

Potential Flood Hazard

FEMA National Flood Hazard Layer

SSI Phase II sponsored by: HOOSIERENERGY


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Henry County, Indiana

Site ID: 18065-040 (94.3 acres)

New Castle Henry County Economic Development Corporation

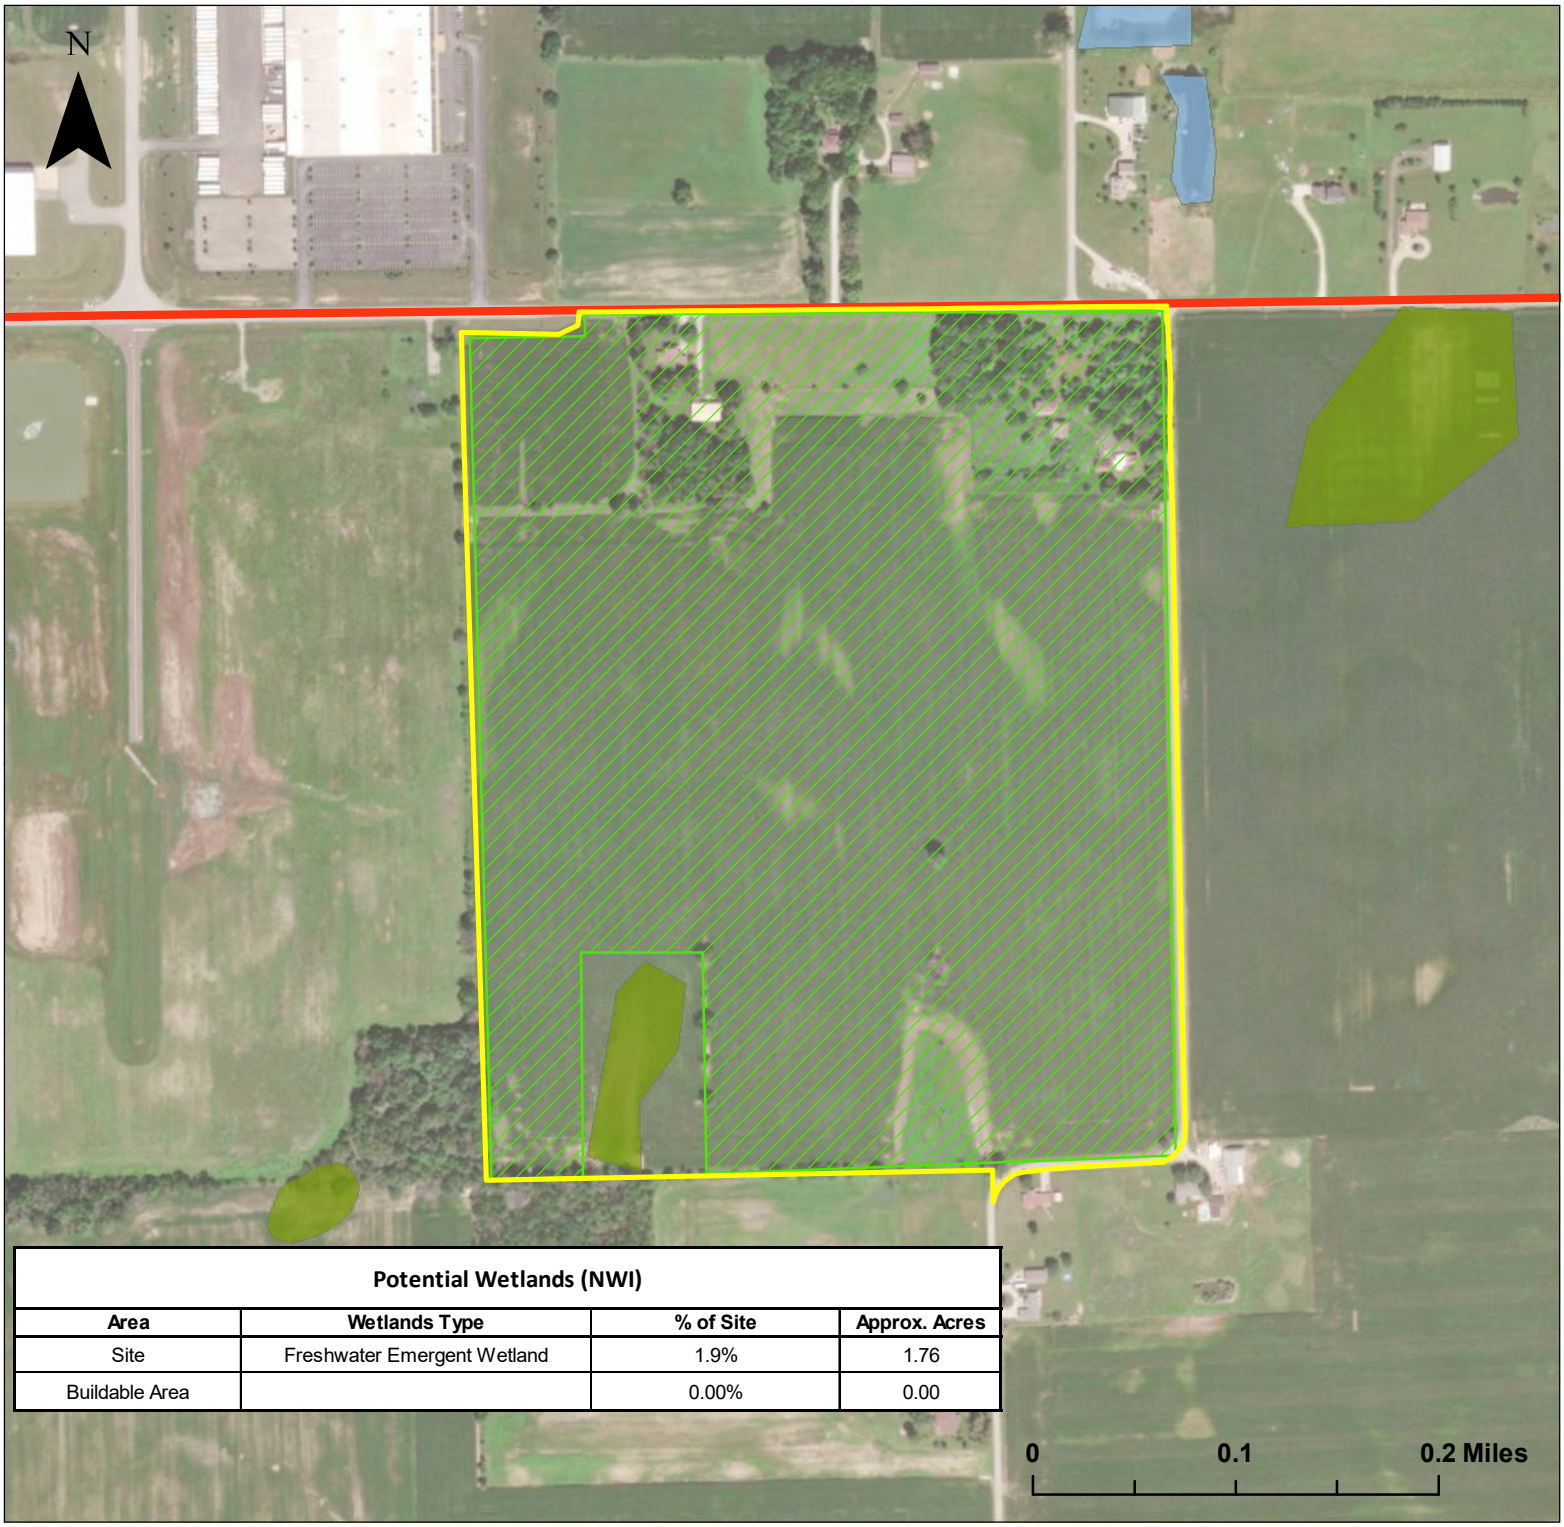

Potential Wetlands (NWI)			
Area	**Wetlands Type**	**% of Site**	**Approx. Acres**
Site	Freshwater Emergent Wetland	1.9%	1.76
Buildable Area		0.00%	0.00

Legend

- E County Rd 400 S
- Site Boundary
- Buildable Area

National Wetlands Inventory

Potential Wetland Type

- Freshwater Emergent Wetland
- Freshwater Pond

Potential Wetlands

USFW/USGS National Wetlands Inventory

SSI Phase II sponsored by: HOOSIERENERGY


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Henry County, Indiana

Site ID: 18065-040 (94.3 acres)

New Castle Henry County Economic Development Corporation

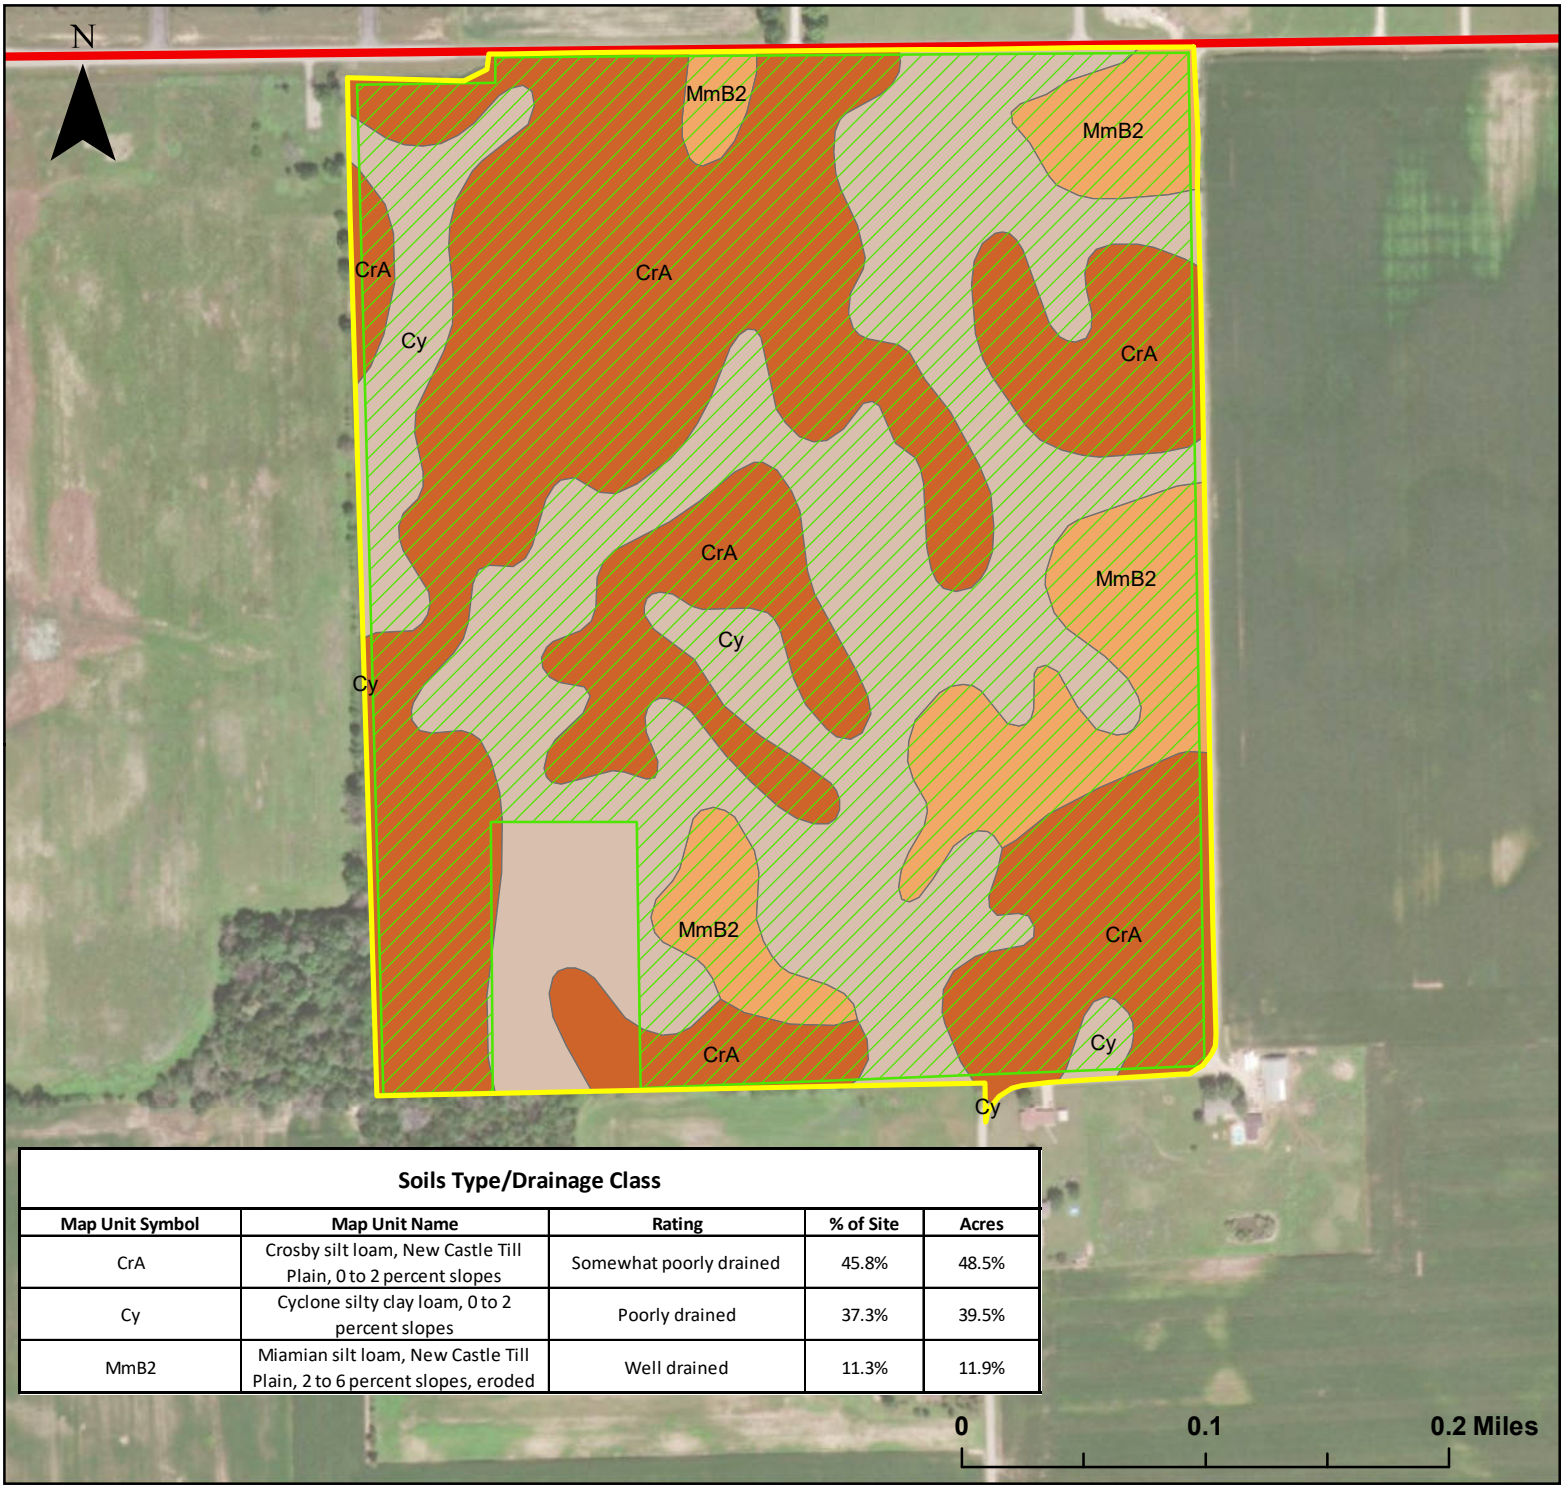

Soils Type/Drainage Class

Map Unit Symbol	Map Unit Name	Rating	% of Site	Acres
CrA	Crosby silt loam, New Castle Till Plain, 0 to 2 percent slopes	Somewhat poorly drained	45.8%	48.5%
Cy	Cyclone silty clay loam, 0 to 2 percent slopes	Poorly drained	37.3%	39.5%
MmB2	Miamian silt loam, New Castle Till Plain, 2 to 6 percent slopes, eroded	Well drained	11.3%	11.9%

Legend

- E County Rd 400 S
- Site Boundary
- Buildable Area

Soil Type

- CrA
- Cy
- MmB2

SSURGO SOILS

Map Unit Name, Percent Slopes

SSI Phase II sponsored by: HOOSIERENERGY


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Henry County, Indiana

Site ID: 18065-040 (94.3 acres)

New Castle Henry County Economic Development Corporation

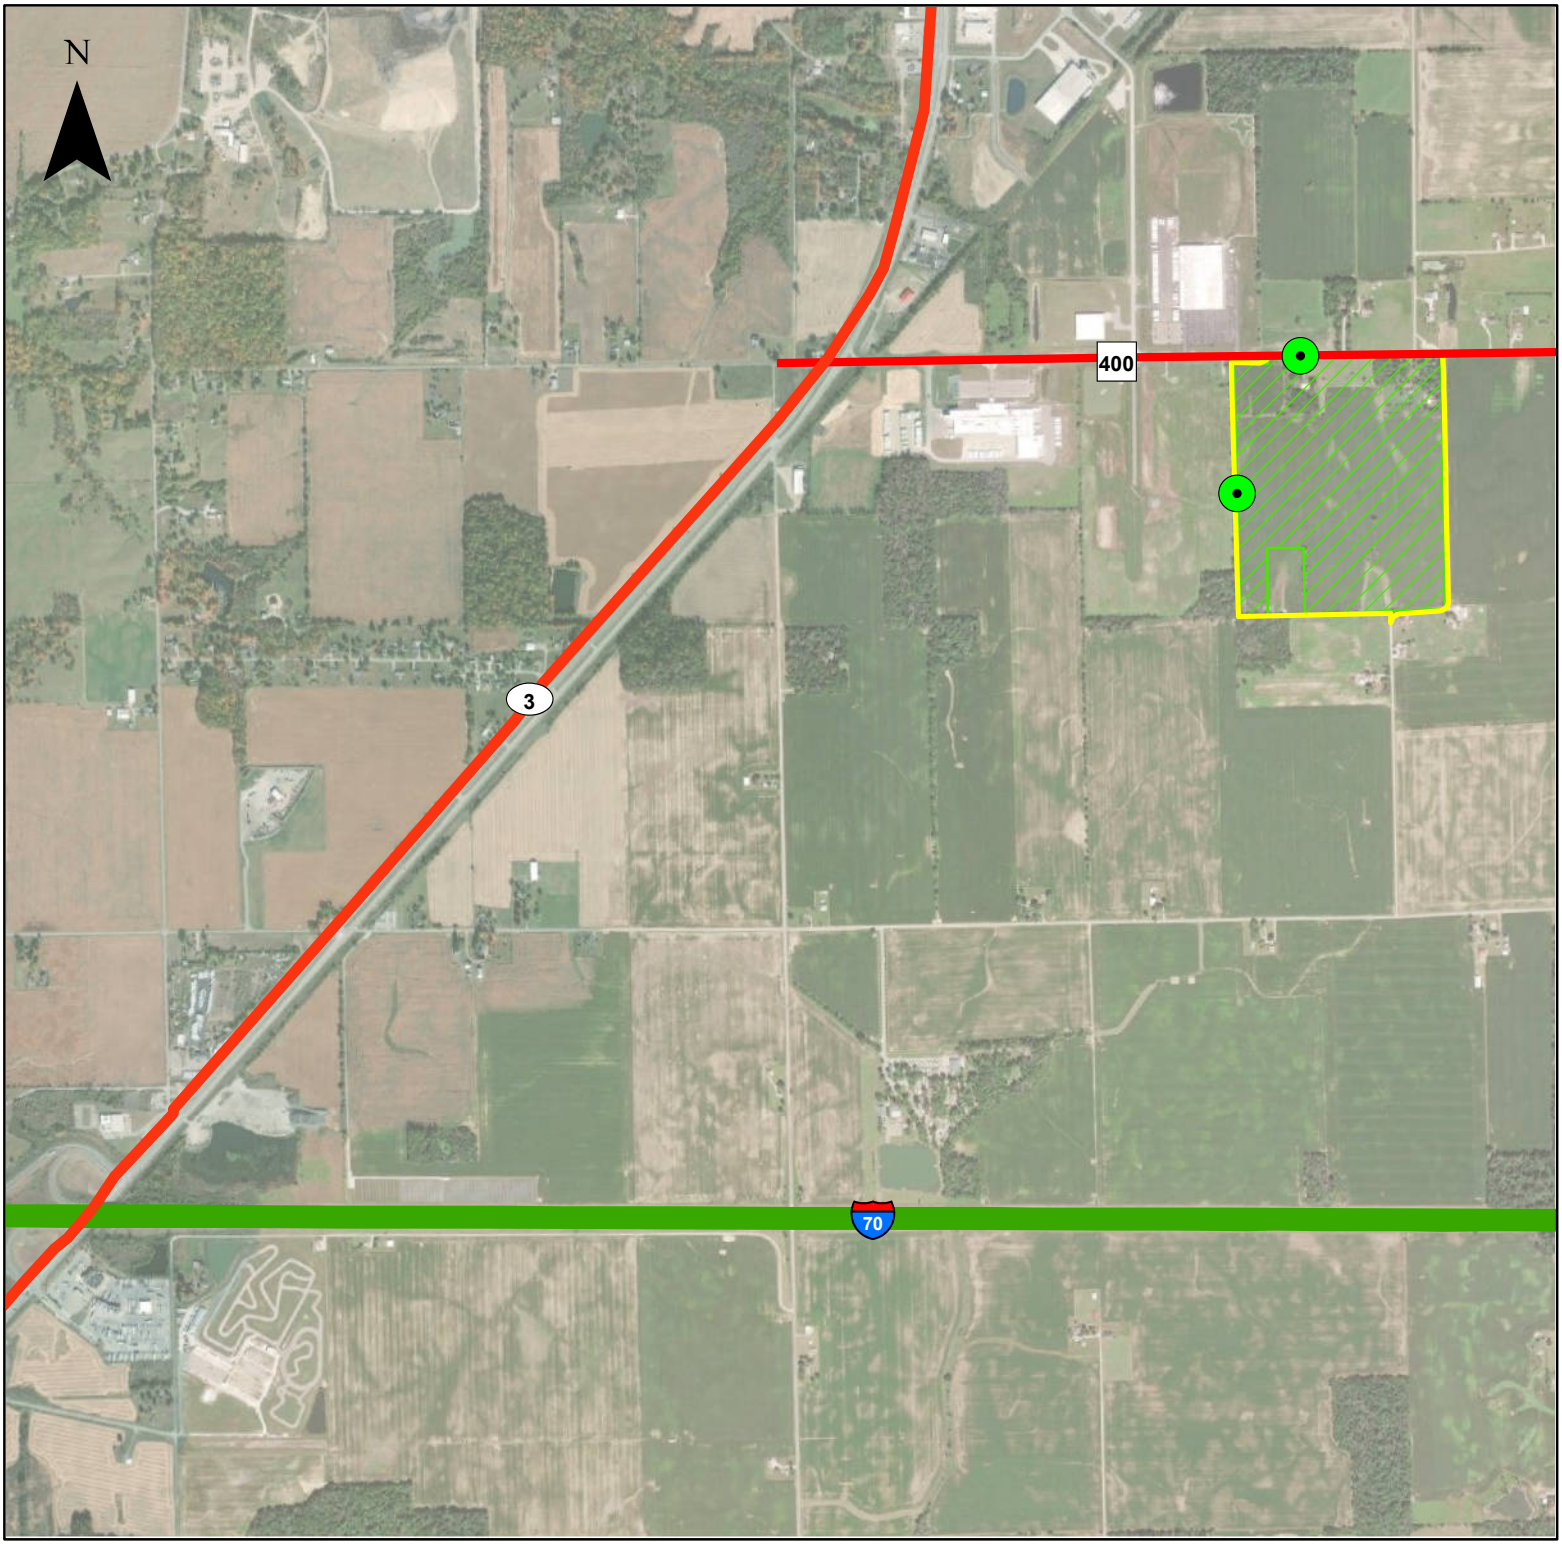

Legend

- Potential Egress/Ingress Point
- State Highway
- E County Rd 400 S
- Interstate
- Site Boundary
- Buildable Area

SITE TRANSPORTATION FEATURES

with Potential Site Access Points

SSI Phase II sponsored by: HOOSIERENERGY


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Henry County, Indiana

Site ID: 18065-040 (94.3 acres)

New Castle Henry County Economic Development Corporation

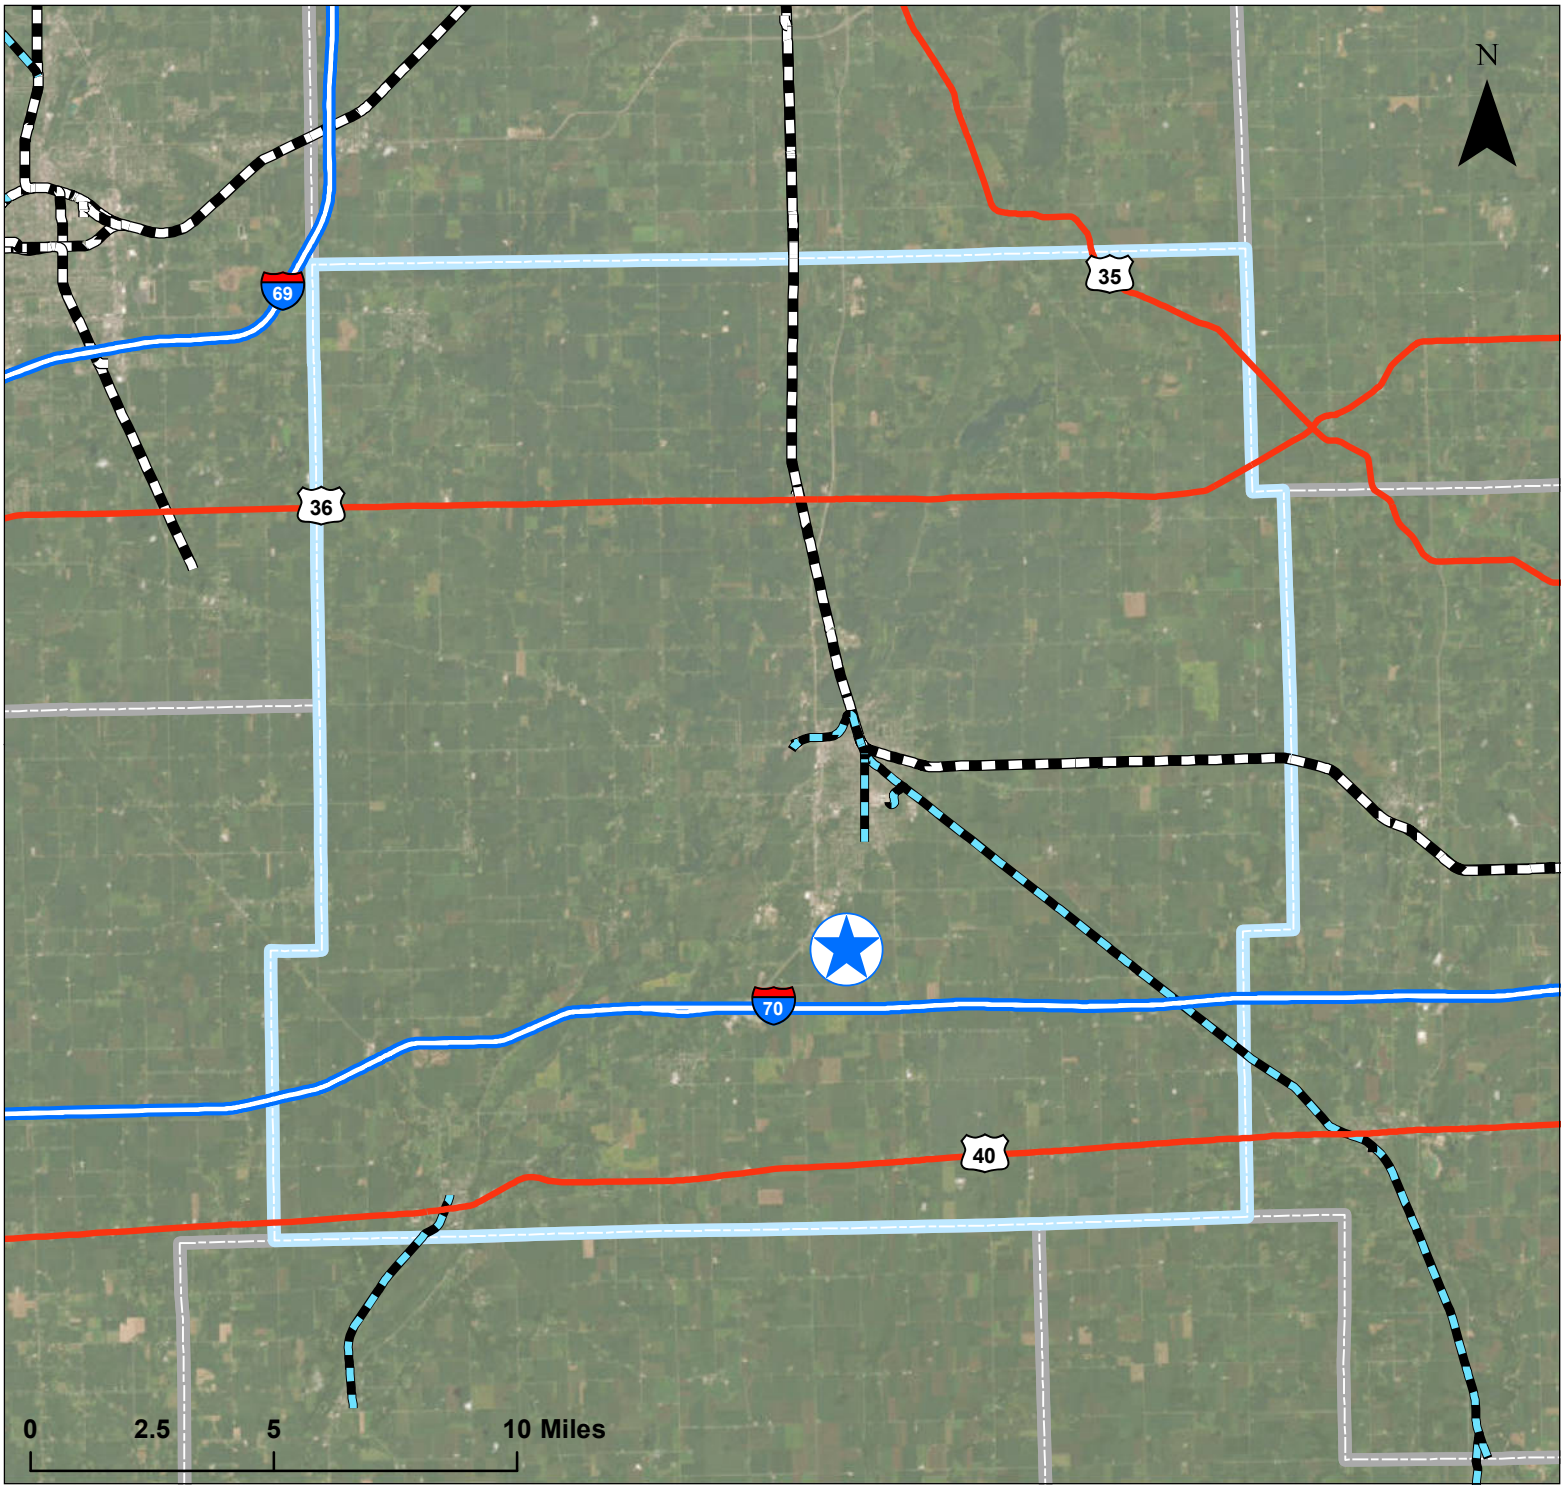

Legend

- Class I Railroad
- Shortline
- Interstate
- U.S. Highway
- Site Point
- Henry County
- County

SITE PRIMARY TRANSPORTATION ASSETS

SSI Phase II sponsored by: HOOSIERENERGY


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Henry County, Indiana

Site ID: 18065-040 (94.3 acres)

New Castle Henry County Economic Development Corporation

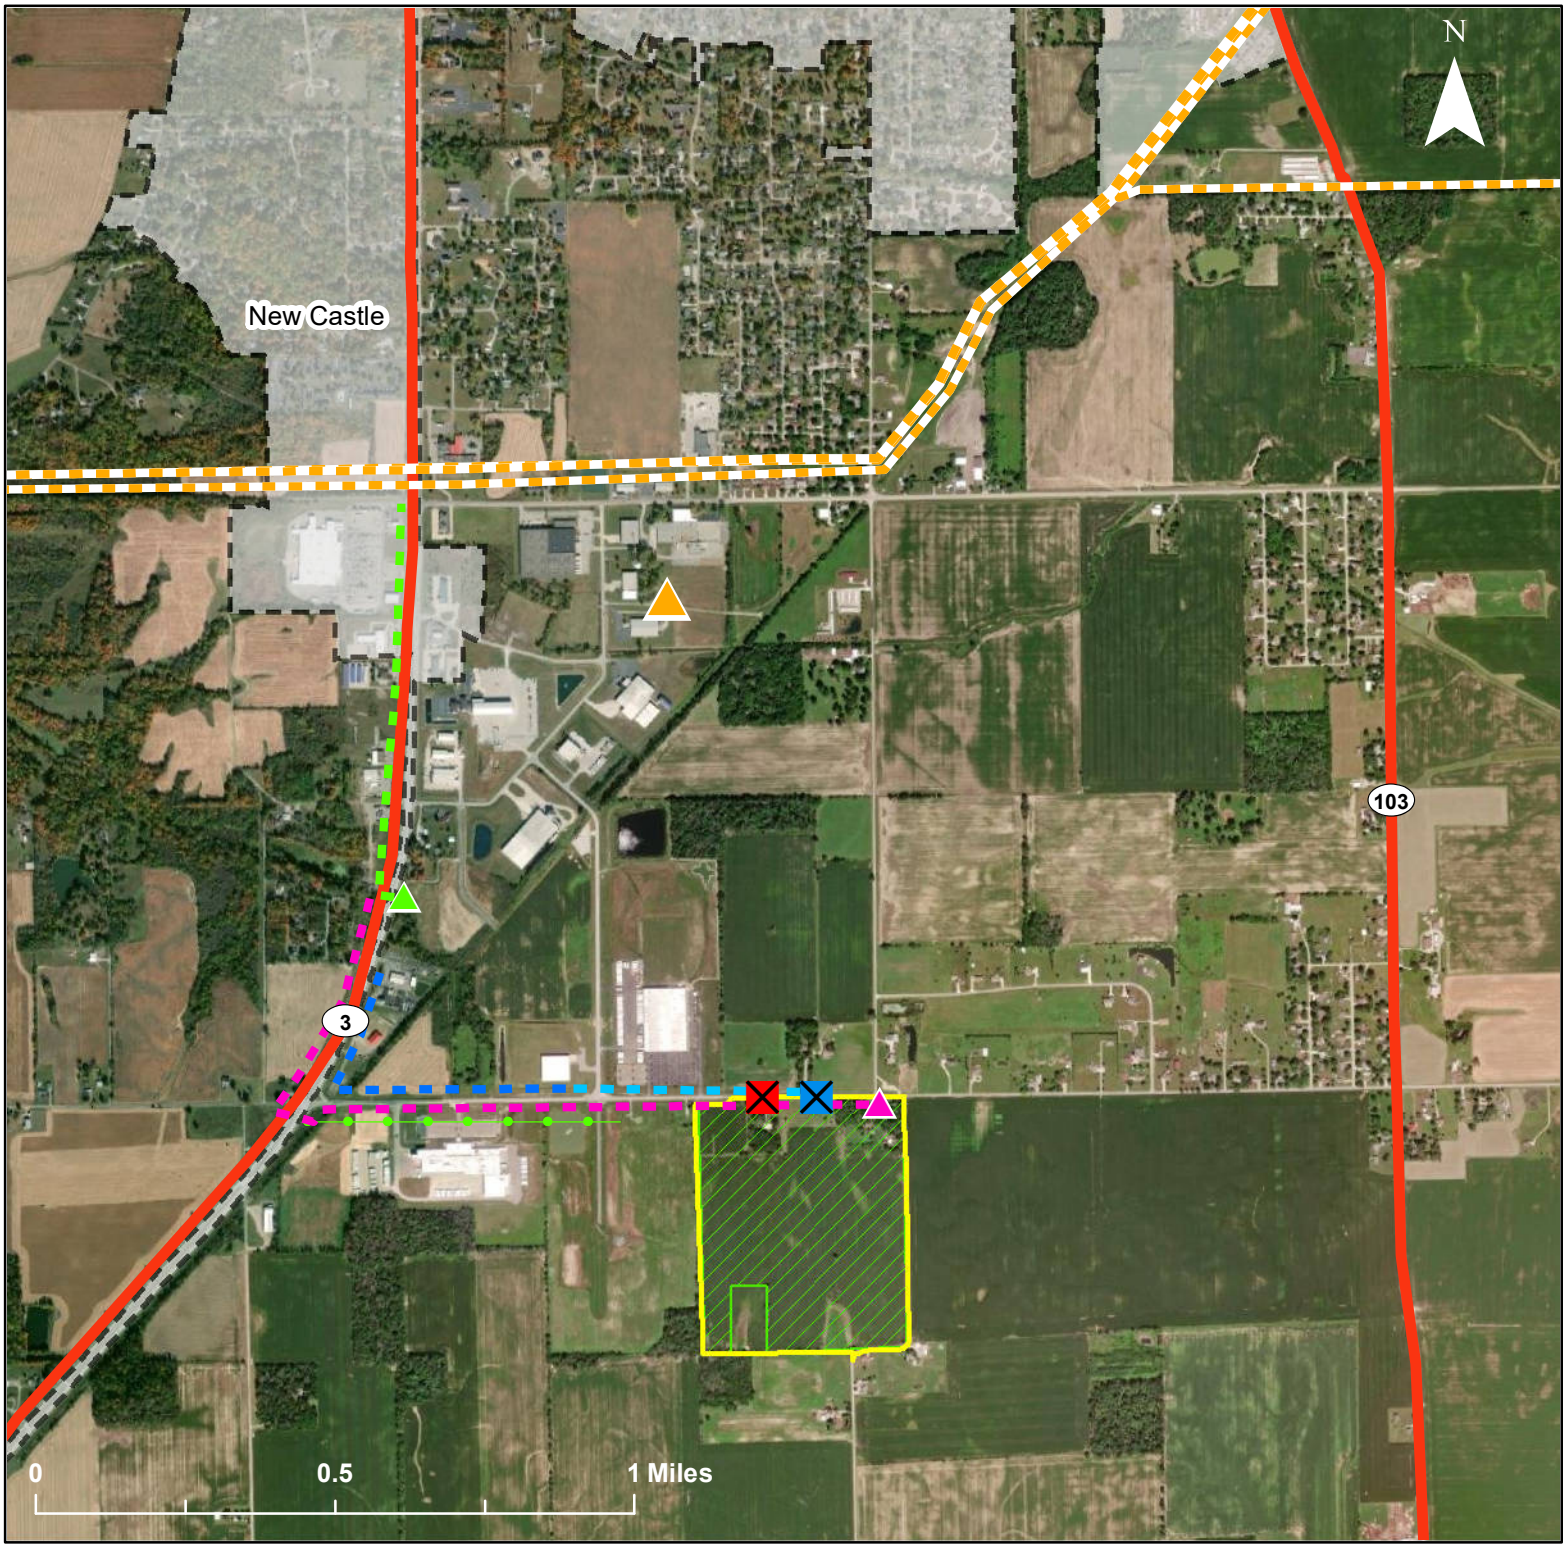

ENERGY INFRASTRUCTURE/UTILITY ACCESS

with Utility Access Point

Legend

Utility Access Point

- Electric, Gas
- Water, Sewer
- Electric Substation
- Electric Transmission Line
- Proposed Lift Station
- Existing LIft Station
- Proposed Sanitary Force Main
- Existing Sanitary Force Main
- Proposed Water Main
- Existing Water Main
- 6" PE Natural Gas Line
- State Highway
- Interstate
- Site Boundary
- Buildable Area
- Municipal Limits

SSI Phase II sponsored by: HOOSIERENERGY


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Henry County, Indiana

Site ID: 18065-040 (94.2 acres)

New Castle Henry County Economic Development Corporation

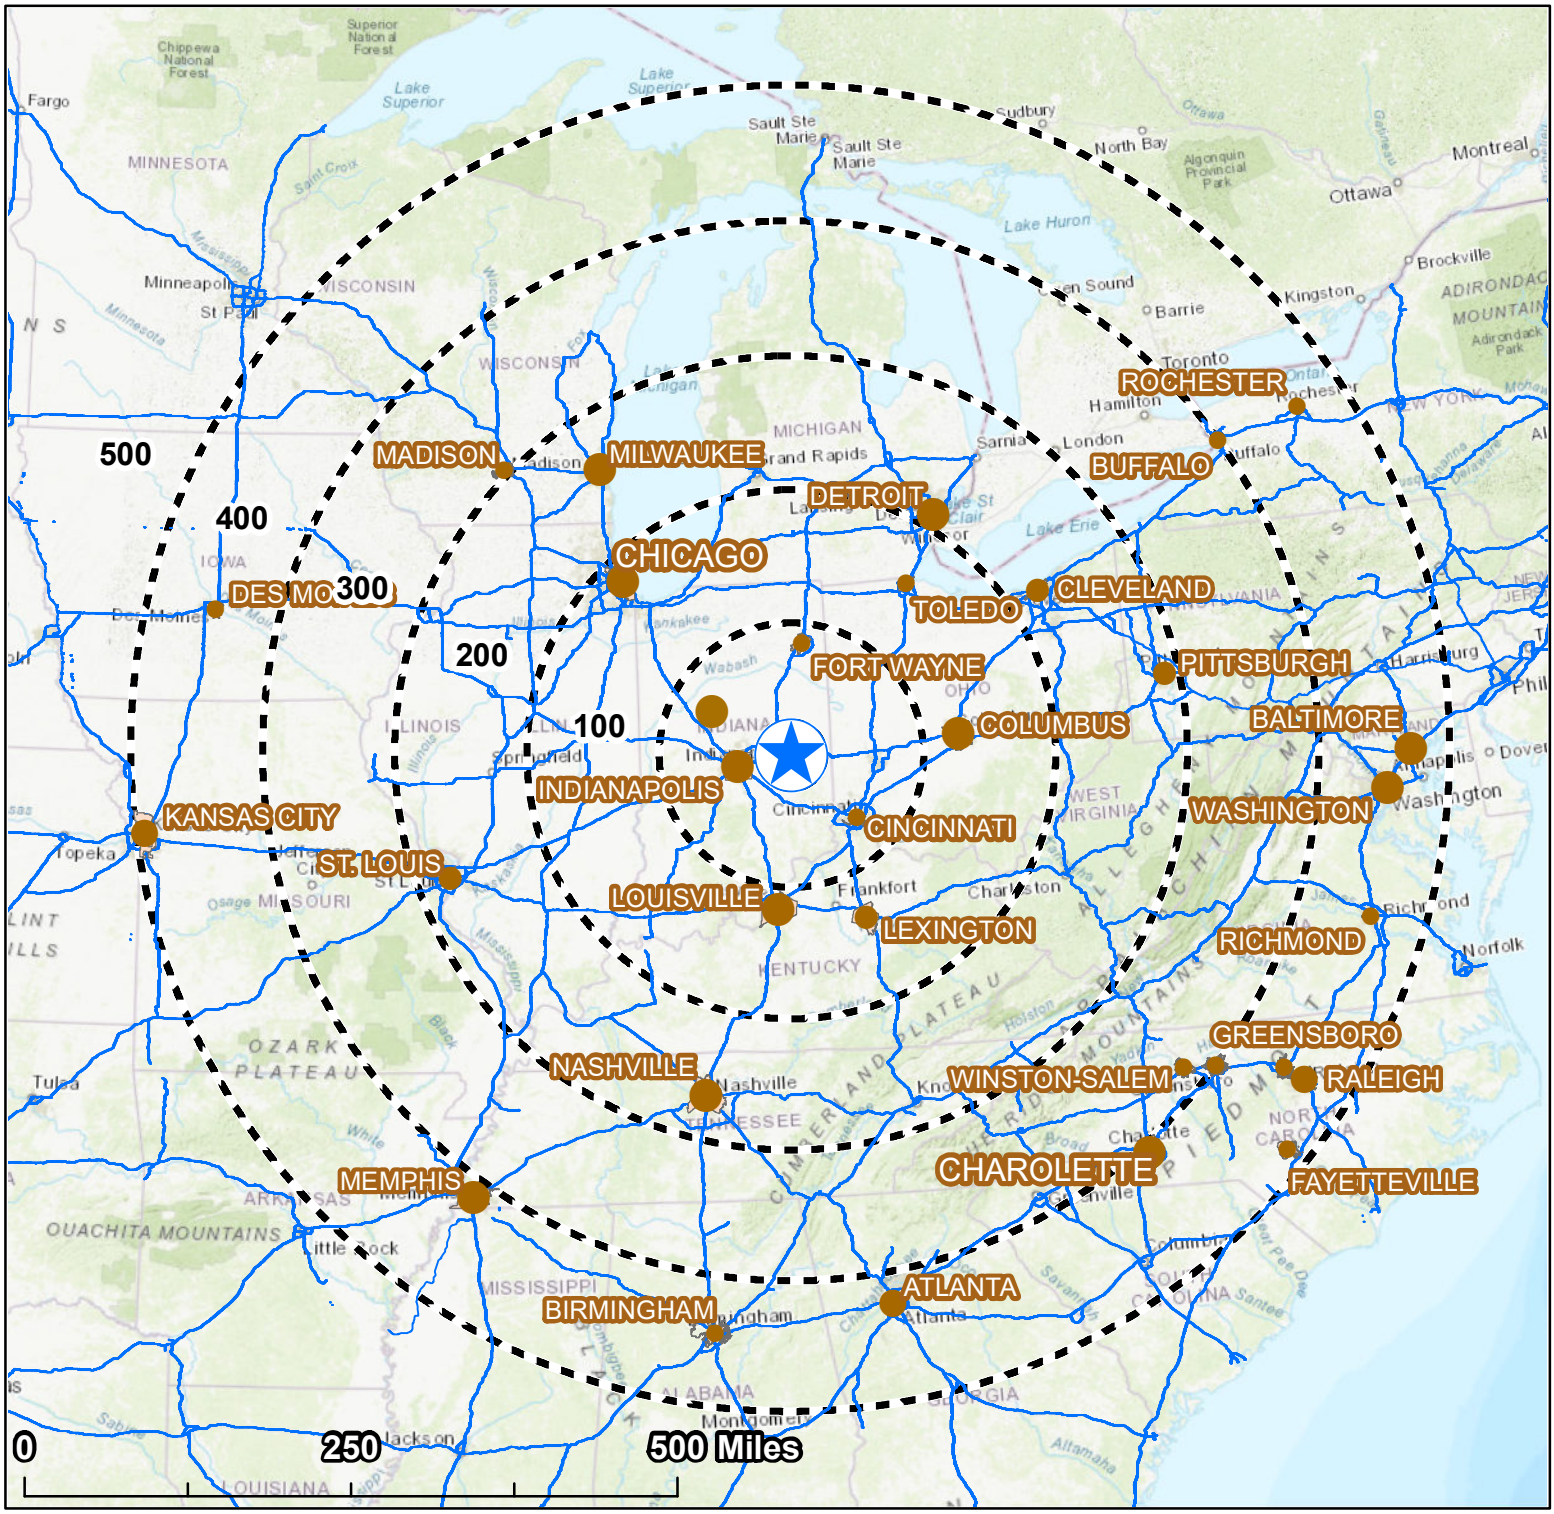

Legend

- Site Point
- Interstate
- Distance in Miles

Major Markets

Population

- <100,000
- 100,000 - 199,999
- 200,000 - 299,999
- 300,000 - 399,999
- 400,000 - 499,999
- >500,000

TRAVEL DISTANCE

Major Markets

SSI Phase II sponsored by: HOOSIER ENERGY, A Touchstone Energy® Cooperative


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Henry County, Indiana

Site ID: 18065-040 (94.3 acres)

New Castle Henry County Economic Development Corporation

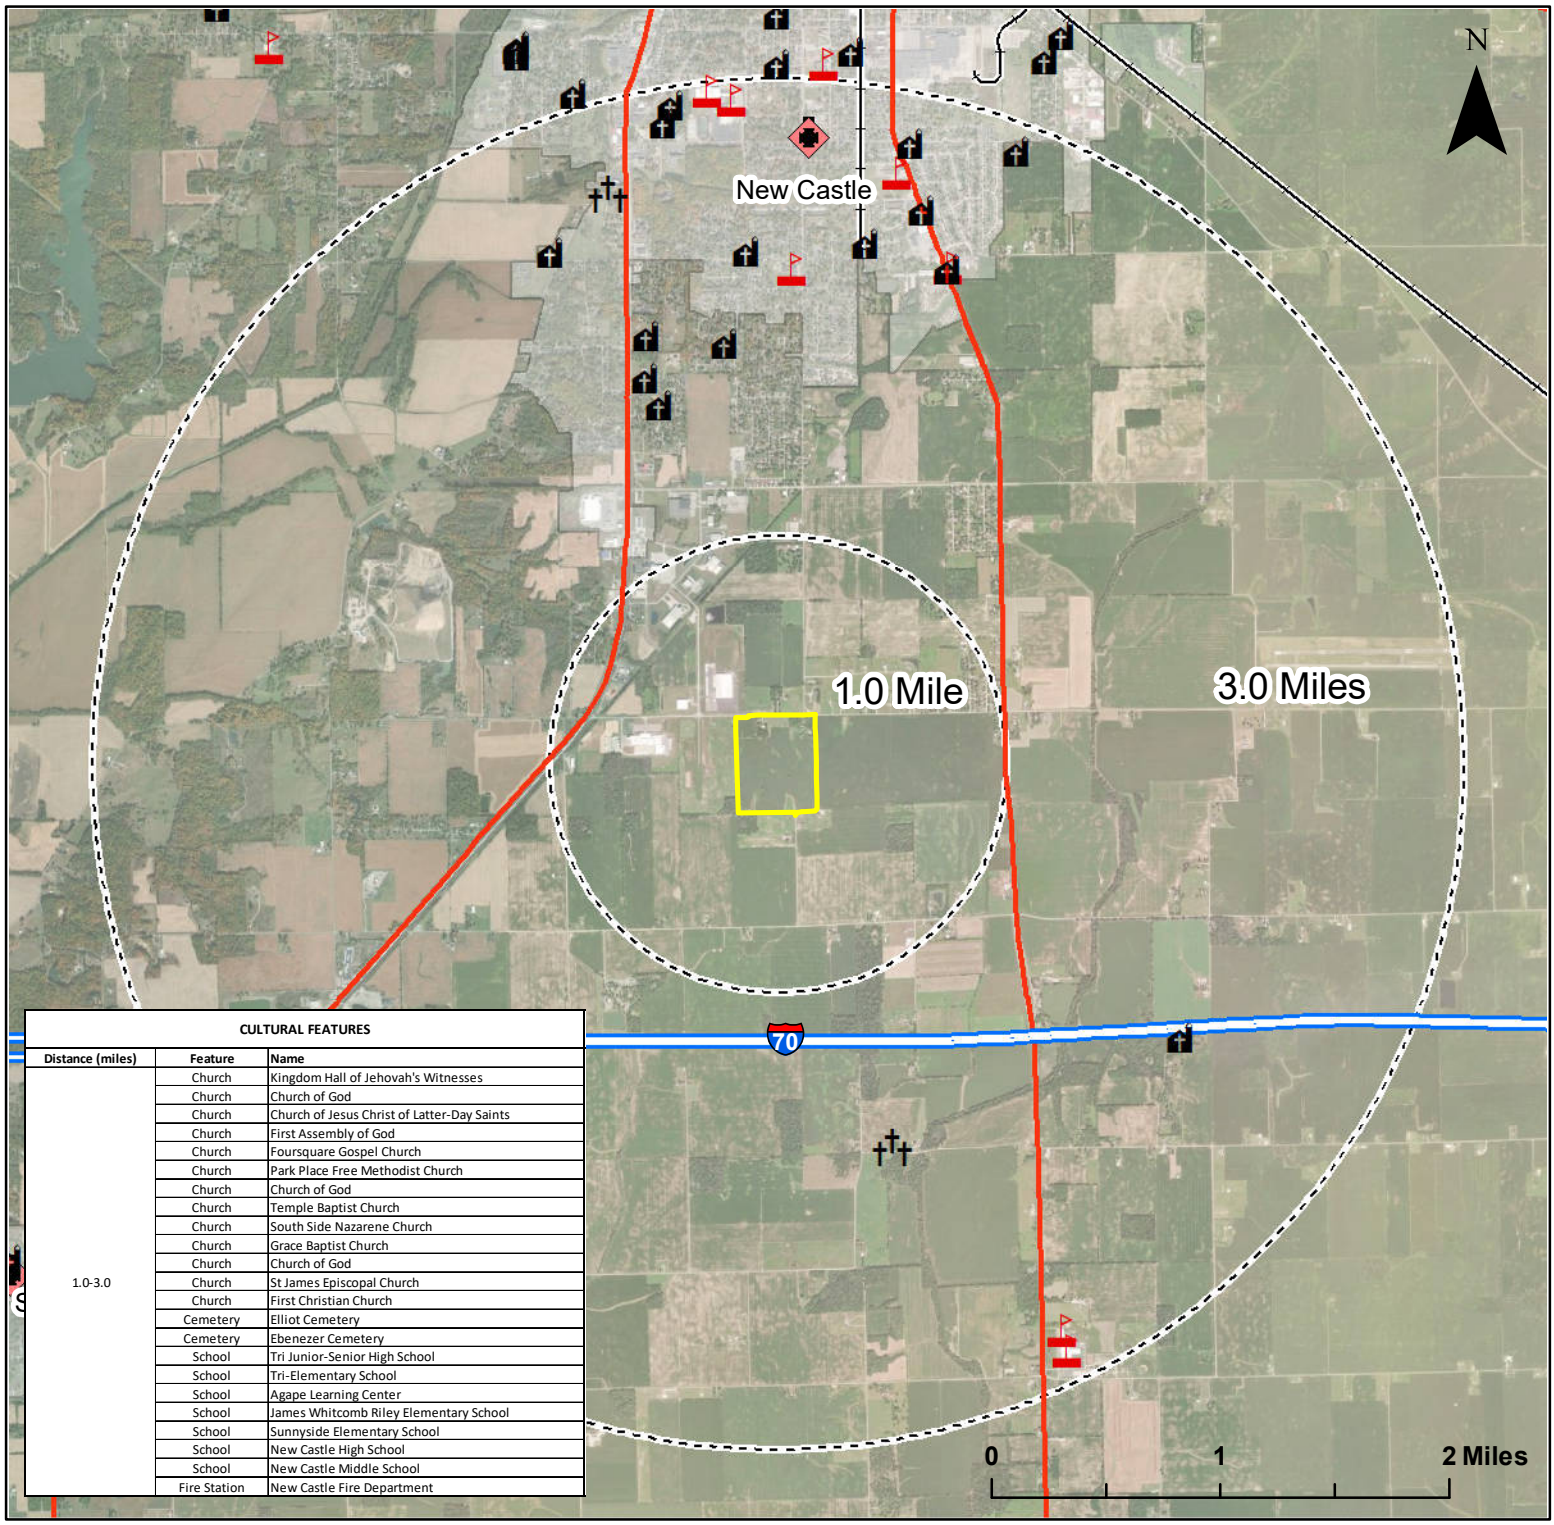

CULTURAL FEATURES

Distance (miles)	Feature	Name
1.0-3.0	Church	Kingdom Hall of Jehovah's Witnesses
	Church	Church of God
	Church	Church of Jesus Christ of Latter-Day Saints
	Church	First Assembly of God
	Church	Foursquare Gospel Church
	Church	Park Place Free Methodist Church
	Church	Church of God
	Church	Temple Baptist Church
	Church	South Side Nazarene Church
	Church	Grace Baptist Church
	Church	Church of God
	Church	St James Episcopal Church
	Church	First Christian Church
	Cemetery	Elliot Cemetery
	Cemetery	Ebenezer Cemetery
	School	Tri Junior-Senior High School
	School	Tri-Elementary School
	School	Agape Learning Center
	School	James Whitcomb Riley Elementary School
	School	Sunnyside Elementary School
	School	New Castle High School
	School	New Castle Middle School
	Fire Station	New Castle Fire Department

Legend

- Rail
- Highway
- Site Boundary
- Distance in miles
- Municipal Limits
- Police Station
- Fire Rescue/EMS
- Hospital
- School
- Cemetery
- Church

CULTURAL FEATURES

within 1.0 and 3.0 Miles of Site

SSI Phase II sponsored by: HOOSIERENERGY


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Henry County, Indiana

Site ID: 18065-040 (94.2 acres)

New Castle Henry County Economic Development Corporation

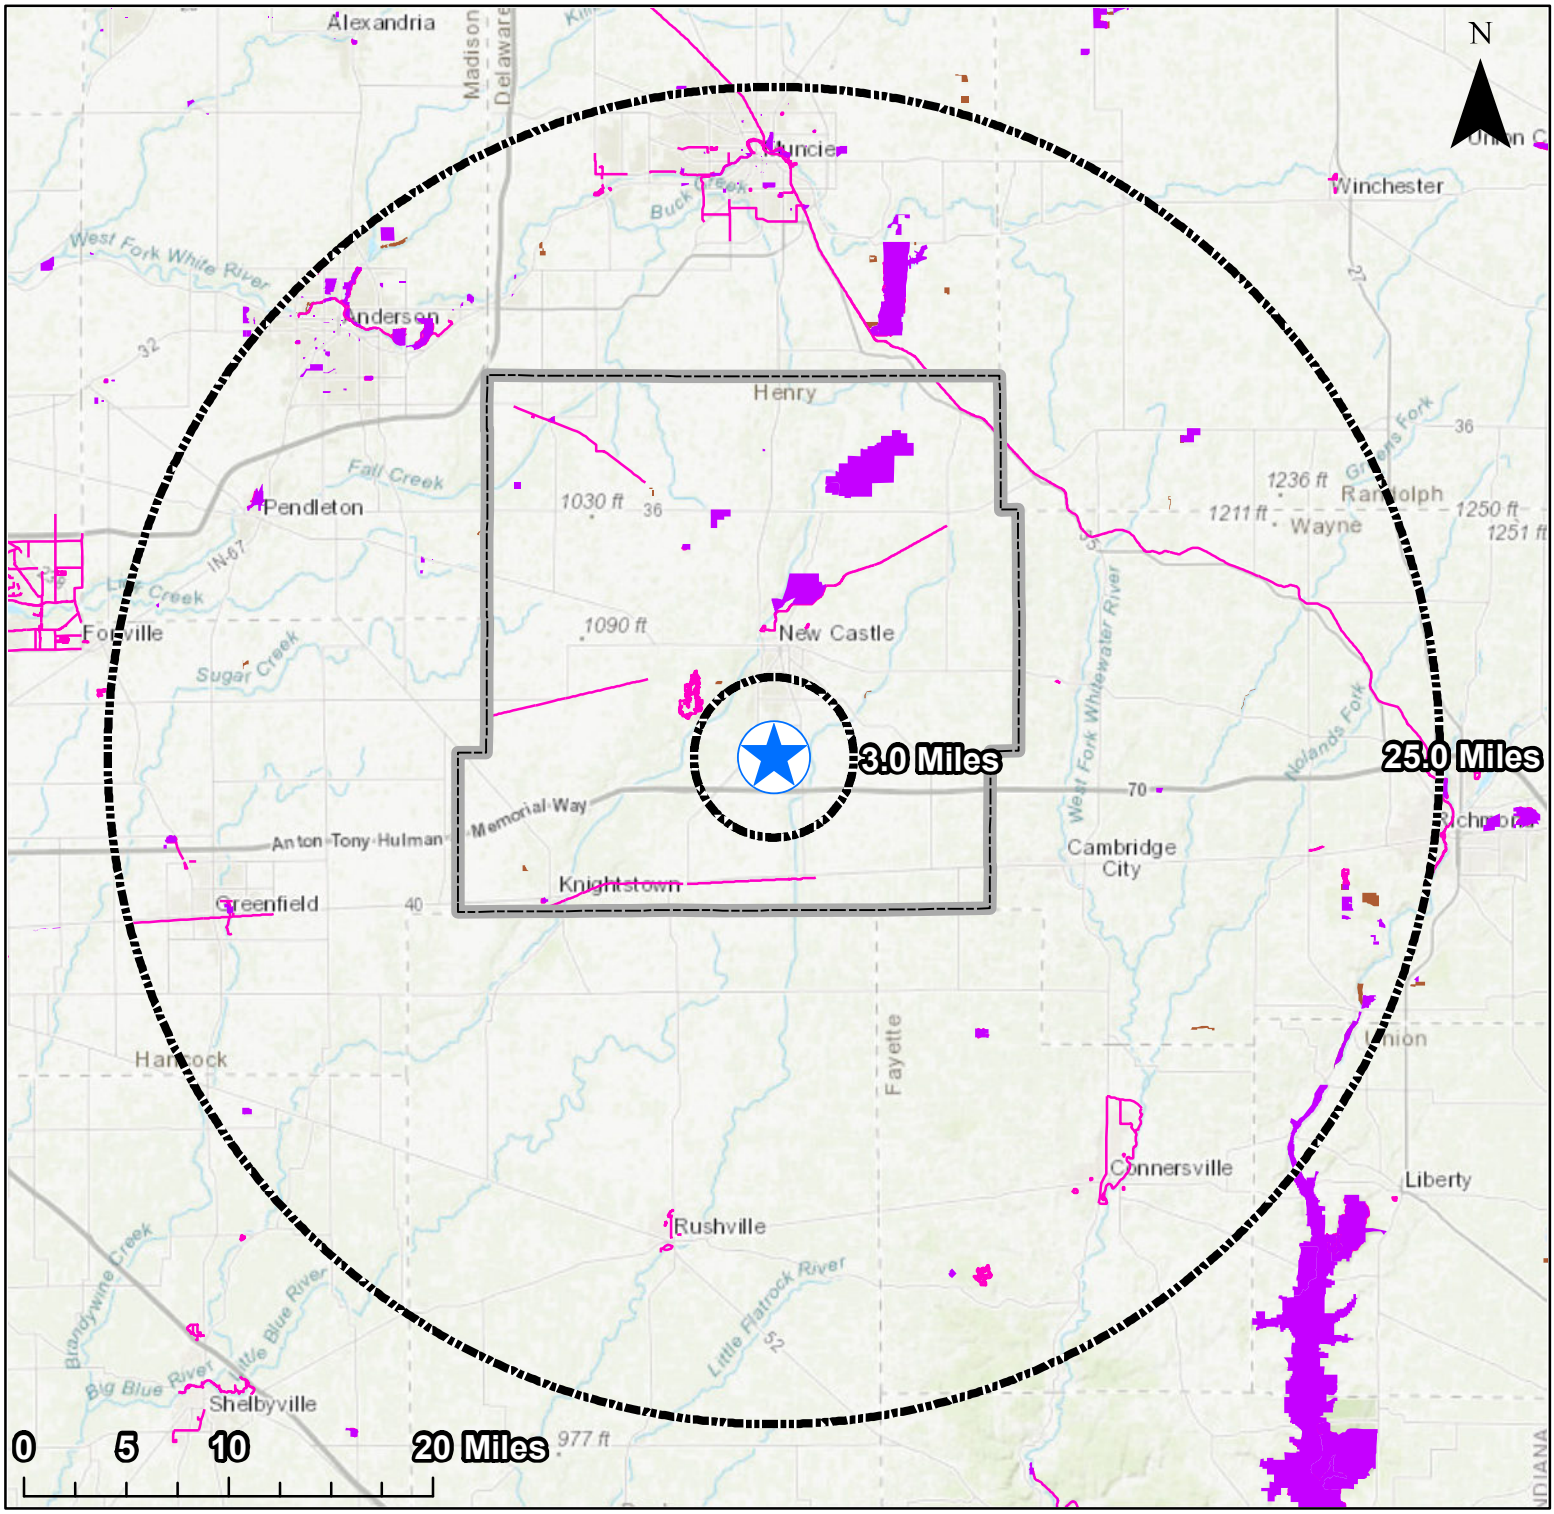

Legend

- Site Point
- IDNR Trails
- Henry County
- Local/State Parks
- National Forests
- INDR Managed Lands
- Conservation Easements
- Distance in Miles

FEDERAL, STATE, AND LOCAL PARKS AND PROTECTED AREAS

within 3.0 and 25.0 Miles of Site

SSI Phase II sponsored by: HOOSIER ENERGY, A Touchstone Energy® Cooperative


SSI Phase II conducted by: LEOTTA LOCATION + DESIGN

SSI Phase II: Preliminary Due Diligence

Henry County, Indiana

Site ID: 18065-040 (94.3 acres)

New Castle Henry County Economic Development Corporation

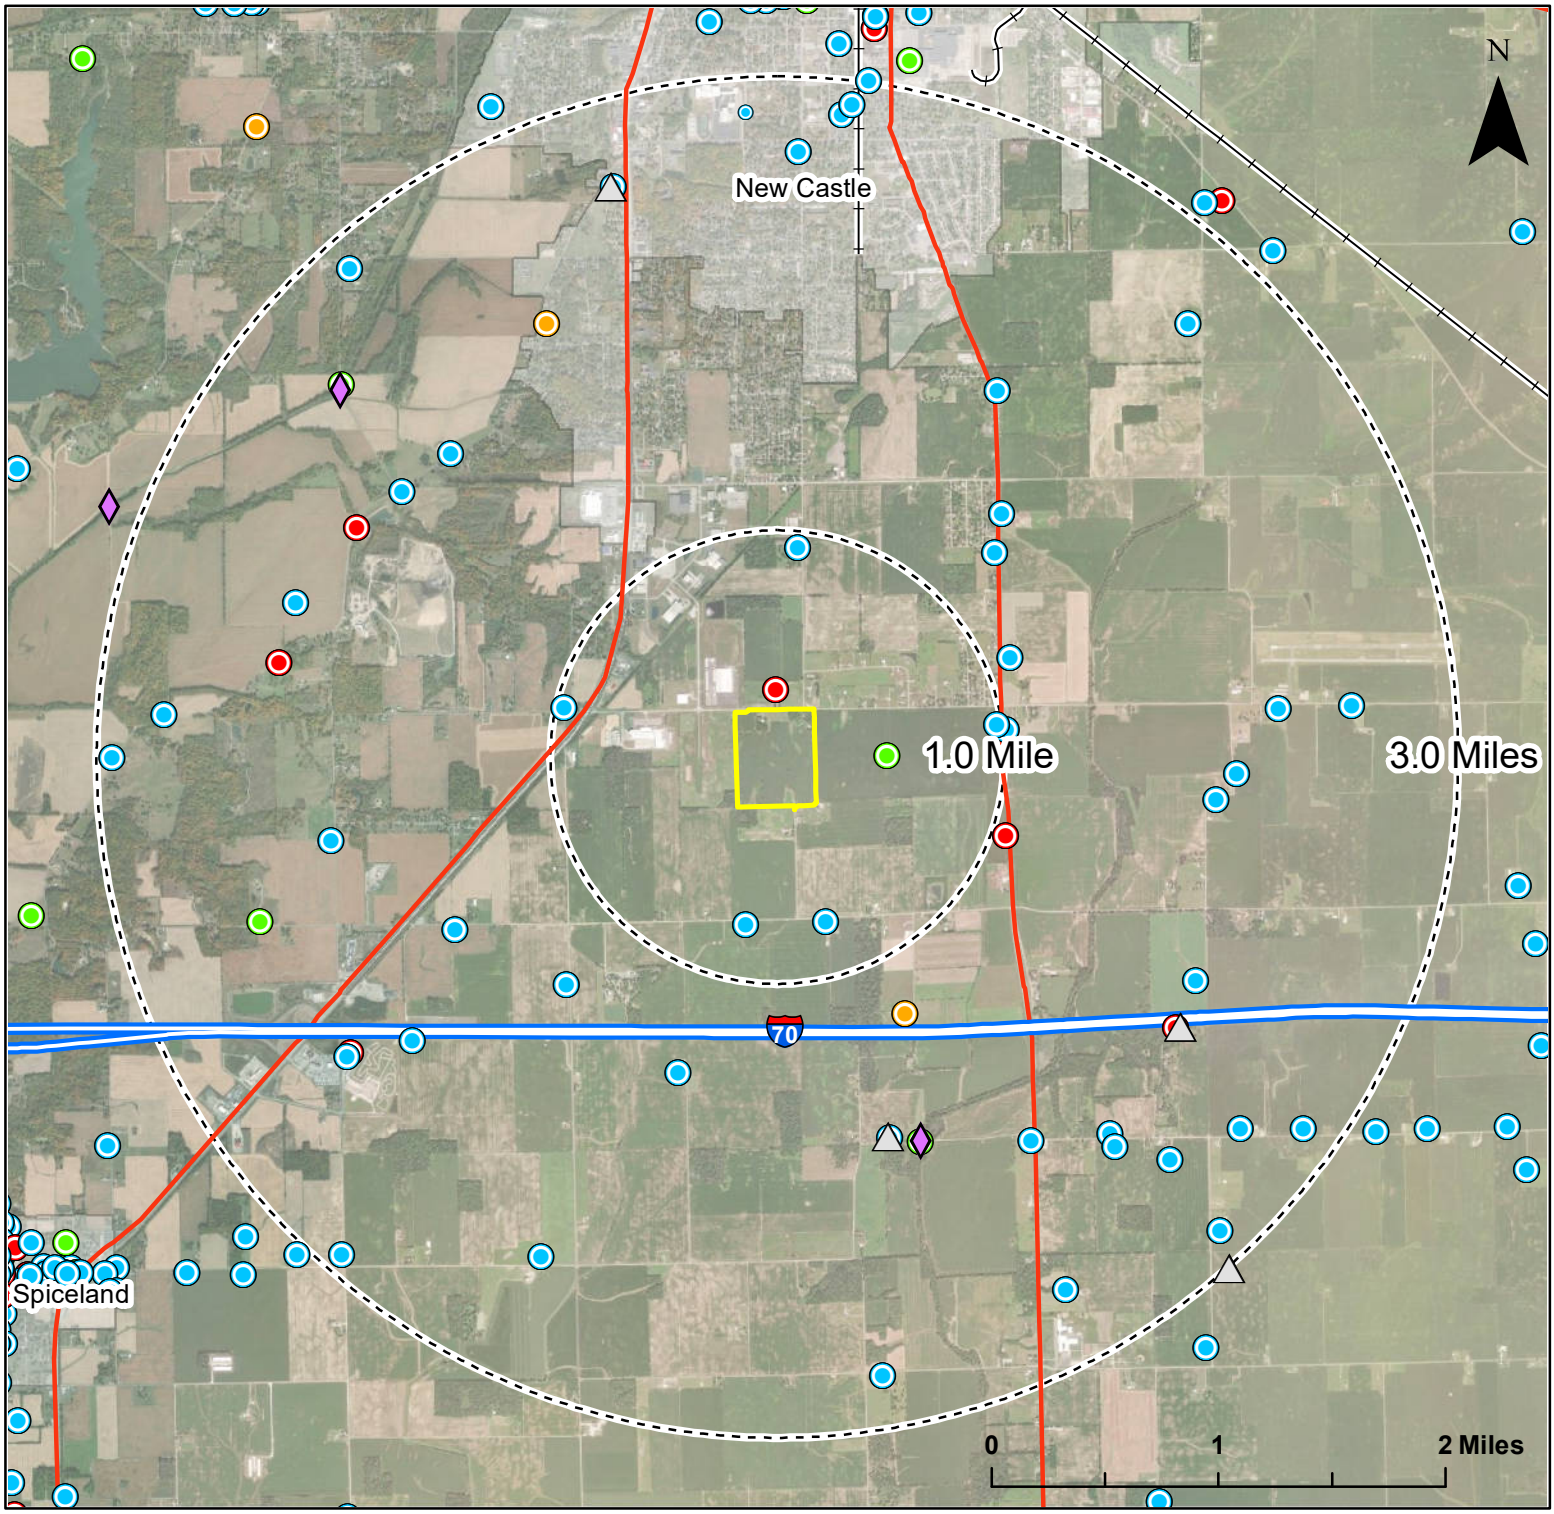

Legend

Historic Sites and Structures

- Demolished
- Non-Contributing
- Contributing
- Notable
- Outstanding
- Historic Bridge
- Cemetery
- Limited Access
- Rail
- Highway
- Site Boundary
- Distance in miles

HISTORIC RESOURCES

within 1.0 and 3.0 Miles of Site

SSI Phase II sponsored by: HOOSIERENERGY

SSI Phase II conducted by: LEOTTA LOCATION + DESIGN